

INTERNATIONAL HYDROGRAPHIC ORGANIZATION



**IHO GEOSPATIAL STANDARD
FOR HYDROGRAPHIC DATA**

Edition 1.0.0 2018

**Special Publication No. S-111
Surface Current Product Specification**

**Published by the
International Hydrographic Bureau
MONACO**

Surface Current Product Specification

Revision History

Version Number	Date	Author/Editor	Purpose
Draft 1.0	December 2012	D. O'Brien, Auth.	Demonstration Version
Draft 1.1	April 2014	L. Maltais, Ed.	Revision for currents
Draft 1.2	August 2014	L. Maltais, Ed	Additional revision of previous version
Draft 1.3	December 2014	L. Maltais, Ed	Additional revision of previous version
Draft 1.4	March 2015	L. Maltais, Ed	Additional revision of previous version
Draft 1.5	March 2015	K. Hess, B. Sullivan, C. Kammerer, E. Mong, Eds.	Put into template format, numerous changes
Draft 1.6	September 2015	SCWG members, Eds.	Changes as result of SCWG3 discussions
Draft 1.7	December 2015	K. Hess, Ed.	Changes per review of Draft 1.6
Draft 1.8	February 2016	K. Hess, Ed.	Changes per review of Draft 1.7
Draft 1.9	September 2016	K. Hess, TWCWG members, Eds.	Changes as result of TWCWG1 discussions
Draft 1.10	January 2017	K. Hess, TWCWG members, Eds.	
Draft 1.11	October 2017	K. Hess, TWCWG members, Eds.	Changes as result of TWCWG2 discussions
Draft 1.12	April 2018	K. Hess, TWCWG, DQWG members, Eds.	Changes per review of v1.11
Edition 1.0.0	May 2018	K. Hess, TWCWG, Eds.	Changes per review of v1.12 and TWCWG3

TABLE OF CONTENTS

1. OVERVIEW	1
1.1 INTRODUCTION.....	1
1.2 SCOPE	2
1.3 REFERENCES.....	3
1.3.1 Normative.....	3
1.3.2 Informative.....	3
1.4 TERMS, DEFINITIONS AND ABBREVIATIONS	4
1.4.1 Use of Language.....	4
1.4.2 Terms and Definitions	4
1.4.3 Abbreviations.....	8
1.5 GENERAL S-111 DATA PRODUCT DESCRIPTION	8
1.6 DATA PRODUCT SPECIFICATION METADATA AND MAINTENANCE.....	8
1.6.1 Product Specification Metadata	8
1.6.2 HO Product Specification Maintenance	9
2. SPECIFICATION SCOPES.....	10
3. DATASET IDENTIFICATION.....	10
4. DATA CONTENT AND STRUCTURE	11
4.1 INTRODUCTION.....	11
4.2 APPLICATION SCHEMA.....	11
4.3 FEATURE CATALOGUE.....	11
4.3.1 Introduction	11
4.3.2 Feature Types.....	12
4.3.3 Feature Relationship.....	12
4.3.4 Information Types	12
4.3.5 Spatial Quality.....	12
4.3.6 Attributes.....	13
4.4 SPATIAL SCHEMA	13
4.4.1 Regular Grids.....	14
4.4.2 Points	16
4.4.3 Summary.....	16
5. COORDINATE REFERENCE SYSTEMS (CRS).....	17
5.1 HORIZONTAL REFERENCE SYSTEM	17
5.2 VERTICAL REFERENCE SYSTEM.....	18
5.3 TEMPORAL REFERENCE SYSTEM	18
6. DATA QUALITY	18
6.1 ASSESSMENT OF DATA.....	18
6.2 ADDITIONAL COMPONENTS	19
7. DATA CAPTURE AND CLASSIFICATION	20
7.1 DATA SOURCES	20
7.2 THE PRODUCTION PROCESS.....	21
7.2.1 Metadata	21
7.2.2 Surface Current Data	22
7.2.3 Digital Tidal Atlas Data	22
8. MAINTENANCE	22
8.1 MAINTENANCE AND UPDATE FREQUENCY.....	22
8.2 DATA SOURCE	23
8.3 PRODUCTION PROCESS.....	23
9. PORTRAYAL	23

9.1 INTRODUCTION.....	23
9.2 DISPLAY OF CURRENT AT A SINGLE POINT.....	24
9.2.1 Arrow Shape	24
9.2.2 Arrow Direction	25
9.2.3 Arrow Colour and Speed Bands	25
9.2.4 Arrow Size.....	26
9.2.5 Numerical Values.....	27
9.2.6 Transparency	28
9.2.7 Scalable Vector Graphics	28
9.2.8 Symbol Placement.....	29
9.3 DISPLAY OF REGULARLY GRIDDED DATA.....	29
9.3.1 High Resolution.....	29
9.3.2 Low Resolution	31
9.4 TEMPORAL RULES.....	33
9.5 PLACEMENT OF LEGEND.....	33
9.6 INTEROPERABILITY	34
9.7 SAMPLE REPRESENTATION.....	35
9.8 PORTRAYAL RULES	36
10. DATA PRODUCT FORMAT (ENCODING).....	37
10.1 INTRODUCTION.....	37
10.2 PRODUCT STRUCTURE	37
10.2.1 Feature Codes (Group_F)	40
10.2.3 Conditional Geography Group (Positioning).....	40
10.2.4 Values Groups (Group_nnn).....	41
10.2.5 Summary of Generalized Dimensions	41
10.2.6 Mandatory Naming Conventions	42
10.3 SAMPLE HDF5 ENCODING.....	42
11. DATA PRODUCT DELIVERY	42
11.1 INTRODUCTION.....	42
11.2 EXCHANGE DATASETS.....	43
11.3 EXCHANGE CATALOGUE.....	43
11.4 DATA PRODUCT FILE NAMING.....	43
11.5 SUPPORT FILES	44
12. METADATA.....	44
12.1 INTRODUCTION.....	44
12.2 DISCOVERY METADATA	44
12.2.1 S111_ExchangeCatalogue	48
12.2.2 S100_CatalogueIdentifier	49
12.2.3 S100_CataloguePointofContact	49
12.2.4 S100_DatasetDiscoveryMetaData.....	50
12.2.5 S111_DataCoverage	51
12.2.6 S100_VerticalAndSoundingDatum	53
12.2.7 S111_DataFormat	53
12.2.8 S100_ProductSpecification.....	54
12.2.9 S100_CatalogueMetadata	54
12.2.10 S100_CatalogueScope.....	55
12.2.11 S100_19115DatasetMetadata	55
12.3 PRODUCT METADATA.....	56
12.4 LANGUAGE	58
ANNEX A. DATA CLASSIFICATION AND ENCODING GUIDE.....	59
A.1 FEATURES.....	59
A.2 FEATURE ATTRIBUTES	59
ANNEX B. ADDITIONAL TERMS AND DEFINITIONS.....	60

ANNEX C. APPLICATION SCHEMA	65
ANNEX D. FEATURE CATALOGUE	68
ANNEX E. TESTS OF COMPLETENESS (NORMATIVE)	70
E.1 COVERAGE CONSISTENCY	70
E.1.1 Test case for coverage geometry	70
E.1.2 Test case for extra data	70
E.1.3 Test case for empty data	70
E.2 LOGICAL CONSISTENCY	71
E.2.1 Conceptual Consistency	71
E.2.2 Domain Consistency	71
E.2.3 Positional Accuracy	71
E.2.4 Temporal Accuracy	72
ANNEX F. SURFACE CURRENT DATA	73
F.1 DATA SOURCES	73
F.2 DATA ORGANIZATION	73
F.2.1 Time Series Data	73
F.2.2 Gridded Data	75
F.3 DIGITAL TIDAL ATLAS DATA	77
F.4 MOVING PLATFORM DATA	78
F.5 PRELIMINARY DATA PRODUCT FORMAT	78
F.6 ADDITIONAL FEATURES OF THE DATA	79
F.6.1 Vertical Reference Datums	79
F.6.2 Uncertainty	79
ANNEX G. SAMPLE HDF-5 ENCODING	81
G.1 STATIONARY PLATFORM (DATACODINGFORMAT=1)	81
G.2 REGULAR GRID (DATACODINGFORMAT=2)	83
G.3 UNGEORECTIFIED GRID (DATACODINGFORMAT=3)	86
G.4 MOVING PLATFORM (DATACODINGFORMAT=4)	88
ANNEX H. COLOUR TABLES	91
ANNEX I. SCALABLE VECTOR GRAPHICS (SVG) CODING	92
I.1 SAMPLE SVG IMAGE	92
I.2 SAMPLE SVG FILE TO DISPLAY ARROWS	92
I.3 SAMPLE CSS FILE	93
ANNEX J. SURFACE CURRENT PORTRAYAL RULES	94
J.1 INTRODUCTION	94
J.2 THE SURFACE CURRENT SYMBOL	94
J.3 SYMBOL SIZE AND ORIENTATION	95
J.4 PLACEMENT OF THE SYMBOL	96
J.5 THINNING OF A FIELD OF ARROWS	96
J.6 TEMPORAL RULES	97

1. OVERVIEW

From ancient times of exploration to modern day shipping, surface currents have played an important role in navigation. With the advent of electronic navigation, surface current data and updates are more accessible and easier to integrate into navigation displays. This integration of the chart with other supplemental data improves decision making and results in more efficient navigation.

1.1 Introduction

A data Product Specification (PS) is a precise technical description that defines the requirements for a geospatial data product and forms the basis for producing or acquiring data. This PS, S-111, conforms to S-100.

The S-111 PS describes the feature *Surface Current* and its two attributes *Surface Current Speed* and *Surface Current Direction* (ANNEX A - DATA CLASSIFICATION AND ENCODING GUIDE), and the relationships of surface currents and their mapping to a dataset. The Surface Current represents the water velocity at one or more geographic locations at either (a) a given depth relative to a named vertical datum, or (b) an average from the surface down to a given depth. The current values are obtained through in situ or remote measurement or by analytic methods or hydrodynamic modeling. The PS includes general information for data identification as well as for data content and structure, reference system, data quality aspects, data capture, maintenance, encoding, delivery, metadata and portrayal. The framework, i.e., the relationships between these elements, is depicted in Figure 1.1. The framework identifies how the various elements of a coverage dataset fit together.

A dataset containing Surface Current data describes a set of values distributed over an area. The structure containing the values is either a Grid Coverage or a Point Coverage.

- Gridded data consists of a set of attribute values organized in a grid together with metadata to describe the meaning of the attribute values and spatial referencing information to position the data. An essential characteristic of a regular grid is that the geographic position of any node can be computed from the values of the origin and point spacing. A coverage includes a function which provides values at geographic locations within the extent of the grid. A continuous function provides values at all locations, while a discrete function, which is used for Surface Currents, provides values at only specific points (e.g., grid nodes).
- Another type of structure is a Point Coverage, which also contains metadata and attribute values, although the locations of the points are not organized into a regular grid. The location of all points must be explicitly specified. There is no coverage function.

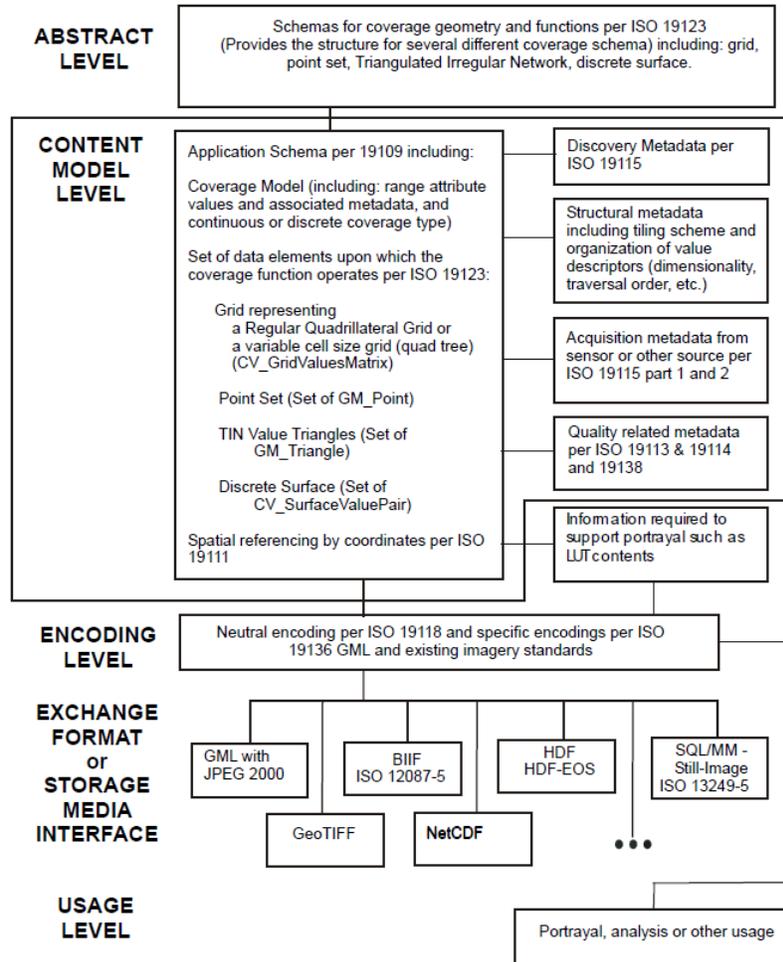


Figure 1.1 - Overall relationship between the elements of the framework (from S-100, Part 8).

The Hierarchical Data Format version 5 (HDF5) promotes compatible data exchange due to its common neutral encoding format, and is the format used for this data product. HDF5 is object oriented and suitable for many types of data and forms the basis of the Network Common Data Form (NetCDF), a popular format used for scientific data.

1.2 Scope

This document describes an S-100 compliant product specification for surface currents and it specifies the content, structure, and metadata needed for creating a fully compliant S-111 product and for its portrayal within an S-100 electronic charting environment. This product specification includes the content model, the encoding, the feature catalogue and metadata. The surface current product may be used either alone or combined with other S-100 compatible data.

1.3 References

1.3.1 Normative

- S-44.** *IHO Standards for Hydrographic Surveys*, 5th Edition February 2008.
- S-100.** *IHO Universal Hydrographic Data Model*, ver. 4.0.0. (September 2018).
- S-101.** *IHO Electronic Navigational Chart Product Specification*, July 2014.
- S-102.** *IHO Bathymetric Surface Product Specification*, April 2012.
- ISO 8601. 2004.** *Data elements and interchange formats - Information interchange - Representation of dates and times*. 2004.
- ISO 3166-1. 1997.** *Country Codes*. 1997.
- ISO/TS 19103. 2005.** *Geographic information - Conceptual schema language*. 2005.
- ISO 19111. 2003.** *Geographic information - Spatial referencing by coordinates*. 2003.
- ISO 19115. 2003.** *Geographic information - Metadata*. 2003.
- ISO 19115-2. 2009.** *Geographic information - Metadata - Part 2: Extension for imagery and gridded data*. 2009.
- ISO/TS 19123. 2005.** *Geographic information - Schema for coverage geometry and functions*. 2005.
- ISO 19129. 2009.** *Geographic information - Imagery, gridded and coverage data framework*. 2009.
- ISO 19131. 2007.** *Geographic information - Data product specifications*. 2007.
- ISO/IEC 19501. 2005.** *Information technology - Unified Modeling Language (UML) Version 1.4.2*. 2005.
- netCDF** – *Network Common Data Form: Unidata* – www.unidata.ucar.edu/software/netcdf
- HDF5** – *Hierarchical Data Format version 5* – www.hdfgroup.org

1.3.2 Informative

- ISO 19101. 2002.** *Geographic information - Reference model*. 2002.
- ISO 19103-2. 2005.** *Geographic information - Conceptual schema language - Part 2*. 2005.
- ISO 19105. 2000.** *Geographic information - Conformance and testing*. 2000.
- ISO 19107. 2003.** *Geographic information - Spatial schema*. 2003.
- ISO 19108. 2002.** *Geographic information - Temporal schema*. 2002.
- ISO 19109. 2005.** *Geographic information - Rules for application schema*. 2005.
- ISO 19110. 2005.** *Geographic information - Methodology for feature cataloguing*. 2005.
- ISO 19113. 2002.** *Geographic information - Quality principles*. 2002.
- ISO 19116. 2004.** *Geographic information - Positioning services*. 2004.
- ISO 19117. 2005.** *Geographic information - Portrayal*. 2005.
- ISO 19118. 2005.** *Geographic information - Encoding*. 2005.
- ISO 19128. 2005.** *Geographic information - Web Map Server interface*. 2005.
- ISO/TS 19130. 2010.** *Geographic information - Imagery sensor models for geopositioning*. 2010.
- ISO/TS 19130-2. 2010.** *Geographic information - Imagery sensor models for geopositioning - Part 2*. 2010.
- ISO 19132. 2007.** *Geographic information - Location-based services – Reference model*. 2007.
- ISO 19133. 2005.** *Geographic Information - Location-based services - Tracking and navigation*. 2005.
- ISO 19136. 2007.** *Geographic information - Geography Markup Language (GML)*. 2007.
- ISO/TS 19138. 2006.** *Geographic information - Data quality measures*. 2006.
- ISO 19142. 2010.** *Geographic information - Web Feature Service*. 2010.
- ISO 19144-1. 2009.** *Geographic information - Classification systems – Part 1: Classification system structure*. 2009.
- ISO 19145. 2010.** *Geographic information - Registry of representations of geographic point location*. 2010.
- ISO 19153. 2010.** *Geographic information - Geospatial Digital Rights Management Reference Model (GeoDRM RM) 1*. 2010.
- ISO 19156. 2010.** *Geographic information - Observations and measurements*. 2010.

ISO 19157. 2010. *Geographic information - Data quality*. 2010.
ISO 19158. 2010. *Geographic Information - Quality assurance of data supply*. 2010.
Springer Handbook of Geographic Information. 2012.
CO-OPS – Tide and Current Glossary 2000
Wikipedia. *Wikipedia*. [Online]

1.4 Terms, Definitions and Abbreviations

1.4.1 Use of Language

Within this document:

- “Must” indicates a mandatory requirement.
- “Should” indicates an optional requirement, that is the recommended process to be followed, but is not mandatory.
- “May” means “allowed to” or “could possibly”, and is not mandatory.

1.4.2 Terms and Definitions

The S-100 framework is based on the ISO 19100 series of geographic standards. The terms and definitions provided here are used to standardize the nomenclature found within that framework, whenever possible. They are taken from the references cited in Clause 1.3, modifications were made when necessary. Additional terms have also been included (see ANNEX B). Terms that are defined in this clause or in ANNEX B are highlighted in **bold**.

coordinate

one of a sequence of n numbers designating the position of a point in n-dimensional space

NOTE: In a **coordinate reference system**, the **coordinate** numbers are qualified by units [ISO 19107, ISO 19111]

coordinate reference system

coordinate system that is related to an **object** by a **datum**

NOTE: For geodetic and **vertical datums**, the **object** will be the Earth [ISO 19111]

coverage

feature that acts as a **function** to return values from its **range** for any **direct position** within its spatial, temporal, or spatiotemporal **domain**

EXAMPLE: Examples include a raster **image**, polygon overlay, or digital elevation matrix

NOTE: In other words, a **coverage** is a **feature** that has multiple values for each **attribute** type, where each **direct position** within the geometric representation of the **feature** has a single value for each **attribute** type

[ISO 19123]

coverage geometry

configuration of the **domain** of a **coverage** described in terms of **coordinates**

[ISO 19123]

data product

dataset or **dataset series** that conforms to a **data product specification**

NOTE: The S-111 data product consists of metadata and one or more sets of speed and direction values [ISO 19131]

data quality

a set of elements describing aspects of quality, including a measure of quality, an evaluation procedure, a quality result, and a scope

depth-specific current

the water current at a specified **depth** below the **sea surface**

direct position

position described by a single set of **coordinates** within a **coordinate reference system** [ISO 19107]

domain

well-defined set. **Domains** are used to define the **domain** set and **range** set of **attributes**, operators, and **functions**

NOTE: *Well-defined* means that the definition is both necessary and sufficient, as everything that satisfies the definition is in the set and everything that does not satisfy the definition is necessarily outside the set

[ISO/TS 19103, ISO 19107, ISO 19109]

feature

abstraction of real-world phenomena

EXAMPLE: The phenomenon named *Eiffel Tower* may be classified with other similar phenomena into a **feature type** named *tower*

NOTE 1: A **feature** may occur as a **type** or an **instance**. **Feature type** or feature instance shall be used when only one is meant

NOTE 2: In UML 2, a **feature** is a property, such as an operation or **attribute**, which is encapsulated as part of a list within a classifier, such as an interface, **class**, or **data type**

[ISO 19101, ISO/TS 19103, ISO 19110]

feature attribute

characteristic of a **feature**

EXAMPLE 1: A **feature attribute** named *colour* may have an **attribute** value *green* which belongs to the **data type** *text*

EXAMPLE 2: A **feature attribute** named *length* may have an **attribute** value *82.4* which belongs to the **data type** *real*

NOTE 1: A **feature attribute** may occur as a **type** or an **instance**. **Feature attribute** type or **feature attribute** instance is used when only one is meant

NOTE 2: A **feature attribute** type has a name, a **data type**, and a **domain** associated to it. A **feature attribute** instance has an **attribute** value taken from the **domain** of the **feature attribute** type

NOTE 3: In a **feature catalog**, a **feature attribute** may include a value **domain** but does not specify **attribute** values for **feature** instances

[ISO 19101, ISO 19109, ISO 19110, ISO 19117]

function

rule that associates each element from a **domain** (source, or **domain** of the **function**) to a unique element in another **domain** (target, codomain, or **range**)

[ISO 19107]

geometric object

spatial **object** representing a geometric set

NOTE: A **geometric object** consists of a **geometric primitive**, a collection of **geometric primitives**, or a **geometric complex** treated as a single entity. A **geometric object** may be the spatial representation of an **object** such as a **feature** or a significant part of a **feature**

[ISO 19107]

georeferenced grid

grid for which cells can be located geographically by the use of specific algorithms or additional data.

grid

network composed of a set of elements, or cells, whose vertices, or nodes, have defined positions within a coordinate system. See also **georeferenced grid**, **regular grid**, **rectangular grid**, **ungeoctified grid**, **node**, and **grid point**.

[ISO 19123]

grid cell

element of a grid defined by its vertices, or **nodes**

grid point

point located at the intersection of two or more **grid cells** in a **grid**. Also called a **node**.

[ISO 19123]

layer-averaged surface current

the water current averaged over the vertical, from the surface to a specified **depth** below the sea surface.

EXAMPLE: the current averaged from 0 metres (sea surface) down to 10 metres.

node

a point located at the vertex of a grid cell. Also called a **grid point**.

range <coverage>

set of **feature attribute** values associated by a **function** with the elements of the **domain** of a **coverage**

[ISO 19123]

record

finite, named collection of related items (**objects** or values)

NOTE: Logically, a **record** is a set of pairs <name, item>

[ISO 19107]

rectangular grid

an orthogonal grid whose cells are rectangles.

regular grid

a **georeferenced rectangular grid** with geodetic coordinates, with the X-axis directed eastward, the Y-axis directed northward, and uniform spacing of points in each direction. Spacing units are degrees of arc.

sea surface

a two-dimensional (in the horizontal plane) field representing the air-sea interface, with high-frequency fluctuations such as wind waves and swell, but not astronomical tides, filtered out.

EXAMPLE: sea surface, river surface, and lake surface

NOTE: This implies marine water, lakes, waterways, navigable rivers, etc.

surface current

the horizontal motion of water at a navigationally significant **depth**, or the vertical average over a **depth**, represented as a velocity **vector** (i.e., speed and direction). **Depths** may extend from the **sea surface** down to 25 metres.

NOTE: IHO Hydrographic Dictionary: current: surface. A current that does not extend more than a few (2-3) metres below the surface.

surface current direction

the direction toward which the surface current flows. Units are arc-degrees.

[CO-OPS 2000]

NOTE: measured clockwise from true north. AKA set.

surface current speed

the speed (rate of change of position over time) of a surface current. Units are knots.

tessellation

partitioning of a space into a set of conterminous geometric objects having the same dimension as the space being partitioned [ISO 19123] NOTE A tessellation composed of congruent regular polygons or polyhedra is a regular tessellation; One composed of regular, but non-congruent polygons or polyhedra is semi-regular. Otherwise the tessellation is irregular.

uncertainty

the interval about a given value that will contain the true value at a given **confidence** level.

NOTE: **uncertainty** is the estimate of the **error** in any measurement or value; since the **error** (difference between true and observed value) depends on true value, which can never be measured. For practical purposes, the **confidence** level is 95% and the **uncertainty** is defined herein as 1.96 times the standard deviation of the differences between observed and predicted values (cf. S-44. *IHO Standards for Hydrographic Surveys*, 5th Edition, February 2008).

ungeorectified grid

grid with non-uniform point spacing in any coordinate system. Includes triangular and curvilinear coordinate grids whose node positions cannot be calculated from the positions of other nodes.

1.4.3 Abbreviations

This product specification adopts the following convention for symbols and abbreviated terms:

ECDIS	Electronic Chart Display Information System
ENC	Electronic Navigational Chart
HDF	Hierarchical Data Format (HDF5 is the fifth release)
IEEE	Institute of Electrical and Electronics Engineers
IHO	International Hydrographic Organization
ISO	International Organization for Standardization
NetCDF	Network Common Data Form
SCWG	Surface Currents Working Group
UML	Unified Modelling Language
UTC	Coordinated Universal Time

1.5 General S-111 Data Product Description

This clause provides general information regarding the data product.

Title: Surface Current Information

Abstract: Encodes information and parameters for use with surface current data

Content: A conformant dataset may contain features associated with surface currents. The specific content is defined by the Feature Catalogue and the Application Schema.

Spatial Extent:

Description: Global, marine areas only
East Bounding Longitude: 180
West Bounding Longitude: -180
North Bounding Latitude: 90
South Bounding Latitude: -90

Purpose: The data shall be collected/produced for the purposes related to surface current use.

1.6 Data Product Specification Metadata and Maintenance

1.6.1 Product Specification Metadata

This information uniquely identifies this Product Specification and provides information about its creation and maintenance. For further information on dataset metadata see the metadata clause.

Title: S-111 Surface Current Product Specification

S-100 Version: 4.0.0

S-111 Version: 1.0.0

Date: 2018-9-15

Language: English

Classification: Unclassified

Contact:

International Hydrographic Bureau,
4 quai Antoine 1er,

B.P. 445
MC 98011 MONACO CEDEX
Telephone: +377 93 10 81 00
Telefax: + 377 93 10 81 40

Role: Owner

URL: http://www.iho.int/mtg_docs/com_wg/SCWG/SCWG_Misc/S-111.pdf

Identifier: S111

Maintenance: For reporting issues which need correction, use the contact information.

1.6.2 HO Product Specification Maintenance

1.6.2.1 Introduction

Changes to S-111 will be released by the IHO as a new edition, revision, or clarification.

1.6.2.2 New Edition

New Editions of S-111 introduce significant changes. New Editions enable new concepts, such as the ability to support new functions or applications, or the introduction of new constructs or data types. New Editions are likely to have a significant impact on either existing users or future users of S-111. All cumulative *revisions* and *clarifications* must be included with the release of approved New Editions.

1.6.2.3 Revisions

Revisions are defined as substantive semantic changes to S-111. Typically, revisions will change S-111 to correct factual errors; introduce necessary changes that have become evident as a result of practical experience or changing circumstances. A revision must not be classified as a clarification. Revisions could have an impact on either existing users or future users of S-111. All cumulative clarifications must be included with the release of approved corrections revisions.

Changes in a revision are minor and ensure backward compatibility with the previous versions within the same Edition. Newer revisions, for example, introduce new features and attributes. Within the same Edition, a dataset of one version could always be processed with a later version of the feature and portrayal catalogues. In most cases a new feature or portrayal catalogue will result in a revision of S-111.

1.6.2.4 Clarification

Clarifications are non-substantive changes to S-111. Typically, clarifications: remove ambiguity; correct grammatical and spelling errors; amend or update cross references; insert improved graphics in spelling, punctuation and grammar. A clarification must not cause any substantive semantic change to S-111.

Changes in a clarification are minor and ensure backward compatibility with the previous versions within the same Edition.

1.6.2.5 Version Numbers

The associated version control numbering to identify changes (**n**) to S-111 must be as follows:

New Editions denoted as **n.0**

Revisions denoted as **n.n**

Clarifications denoted as **n.n.n**

2. SPECIFICATION SCOPES

This product specification outlines the flow of data from inception, through the national Hydrographic Office (HO), to the end user. The data may be observed or modelled. Requirements for data and metadata are provided. This document does not include product delivery mechanisms.

Scope ID: Global

Level: 006 — series

Level name: Surface Current Dataset

3. DATASET IDENTIFICATION

A surface current dataset that conforms to this Product Specification uses the following general information for distinction:

Title: Surface Current Data Product

Alternate Title: None

Abstract: The data product is a file containing surface water current data for a particular geographic region and set of times, along with the accompanying metadata describing the content, variables, applicable times and locations, and structure of the data product. Surface current data includes speed and direction of the current, and may represent observed or mathematically-predicted values. The data may consist of currents at a small set of points where observations and/or predictions are available, or may consist of numerous points organized in a grid as from a hydrodynamic model forecast. Measures of the quality of position, speed, direction, and time data are included.

Topic Category: Transportation (ISO 19115 Domain Code 018).

Geographic Description: Areas specific to marine navigation.

Spatial Resolution: Varies (e.g., 0.1 km to 1000 km). The spatial resolution varies according to the model and the size of grid spacing, or on the number of observing locations adopted by the producer (Hydrographic Office).

Purpose: Surface current data are intended to be used as stand-alone data or as a layer in an ENC.

Language: English (mandatory).

Classification: Data may be classified as one of the following:
Unclassified
Restricted
Confidential
Secret
Top Secret

Spatial Representation Types: Coverage

Point of Contact: Producing agency.

Use Limitation: Invalid over land.

4. DATA CONTENT AND STRUCTURE

4.1 Introduction

This Section discusses the application schema, which is described in UML; the feature catalogue; dataset types, in which there is an extensive discussion of the current data; dataset loading and unloading; and geometry.

Surface current data consist of the current speed and direction near the sea surface. The data may either be depth-specific current or layer-averaged surface current. Current data usually are represented as a time series of values for either a single point (i.e., one geographic location) or for an array of points.

4.2 Application Schema

This application schema shall be expressed in UML. The details of the Application Schema are given in ANNEX C.

4.3 Feature Catalogue

4.3.1 Introduction

The S-111 Feature Catalogue describes the feature types, information types, attributes, attribute values, associations and roles which may be used in a Surface Current Dataset. See ANNEX D – FEATURE CATALOGUE.

The S-111 Feature Catalogue is available in an XML document which conforms to the S-100 XML Feature Catalogue Schema and can be downloaded from the IHO website.

4.3.2 Feature Types

4.3.2.1 Geographic

Geographic (geo) feature types form the principle content of S-111 and are fully defined by their associated attributes and information types.

4.3.2.2 Meta

Meta features contain information about other features within a dataset. Information defined by meta features override the default metadata values defined by the dataset descriptive records. Meta attribution on individual features overrides attribution on meta features.

4.3.3 Feature Relationship

A feature relationship links instances of one feature type with instances of the same or a different feature type. In S-111, there are no feature relationships.

4.3.4 Information Types

Information types define identifiable pieces of information in a dataset that can be shared between other features. They have attributes but have no relationship to any geometry; information types may reference other information types.

4.3.5 Spatial Quality

Spatial quality attributes (Figure 4.1) are carried in an information class called **spatial quality**.

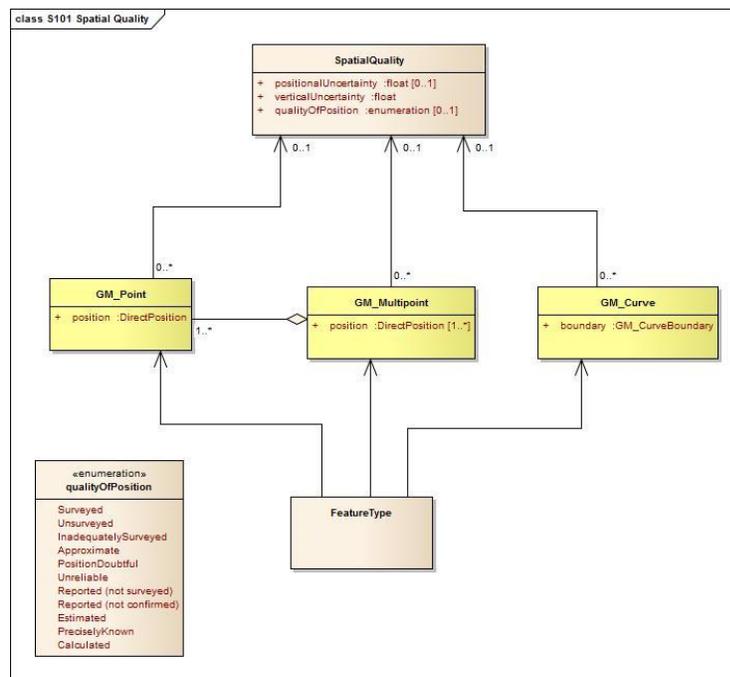


Figure 4.1 - Spatial Quality Information Type. Note that 'horizontalUncertainty' has been replaced by the preferred 'horizontalPositionUncertainty'.

Only points, multipoints and curves can be associated with spatial quality. Currently no use case for associating surfaces with spatial quality attributes is known, therefore this is prohibited. Vertical uncertainty is prohibited for curves as this dimension is not supported by curves. Surface currents are usually defined at one or more individual locations, so spatial quality applies to these locations.

4.3.6 Attributes

S-100 defines attributes as either simple or complex. S-111 uses eight types of simple attributes; they are listed in Table 4.1. There are no complex attributes. A compound attribute is an array containing multiple simple, and possibly dissimilar, attribute types.

Table 4.1 - Simple feature attribute types.

Type	Definition
Enumeration	A fixed list of valid identifiers of named literal values
Boolean	A value representing binary logic. The value can be either True or False. The default state for Boolean type attributes (i.e. where the attribute is not populated for the feature) is False.
Real	A signed Real (floating point) number consisting of a mantissa and an exponent
Integer	A signed integer number. The representation of an integer is encapsulation and usage dependent.
CharacterString	An arbitrary-length sequence of characters including accents and special characters from a repertoire of one of the adopted character sets
Date	A date provides values for year, month and day according to the Gregorian Calendar. Character encoding of a date is a string which must follow the calendar date format (complete representation, basic format) for date specified in S-100, Clause 4a-5.6.4). See also ISO 8601:1988. EXAMPLE 19980918 (YYYYMMDD)
Time	A time is given by an hour, minute and second. Character encoding of a time is a string that follows the local time (complete representation, basic format) format defined in S-100, Clause 4a-5.6.4). See also ISO 8601:1988. EXAMPLE: 183059Z
Date and Time	A DateTime is a combination of a date and a time type. Character encoding of a DateTime shall follow S-100, Clause 4a-5.6.4). See also ISO 8601:1988. EXAMPLE: 19850412T101530Z

4.4 Spatial Schema

Surface current data are represented in two ways: arrays of points contained in a regular grid, and sets of points not described by a regular grid. Further details on the data product are given in Clause 10 – DATA PRODUCT FORMAT.

Surface current data has four basic types, based on their sources:

1. observed or predicted values at a number of stationary locations,

2. predicted values (often from hydrodynamic models) arranged in a regular grid,
3. values at multiple locations but not in a regular grid, and
4. observed values at a moving station (such as a surface drifter).

The four types of data have structures that can be described by two S-100 coverages: S100_Point Coverage and S100_Grid Coverage (S-100 v 4.0.0, Clause 8-7).

Grid Coverage The class S100_Grid Coverage represents a set of values assigned to the points in a two-dimensional grid. Attributes include *interpolationType*, *dimension*, *axisNames*, *origin*, *coordinateReferenceSystem*, *offsetVectors*, *origin*, *extent*, *sequencingRule*, *startSequence*, and *rangeType*.

Point Coverage The class S100_Point Coverage represents a set of values, such as speed and direction values, assigned to a set of arbitrary X,Y points. Each point is identified by a horizontal coordinate geometry pair (X,Y) and assigned one or more values as attribute values. These values are organized in a record for each point. Attributes include *domainExtent*, *rangeType*, *metadata*, *commonPointRule*, *geometry*, and *value*.

The types of data and their corresponding coverages are shown in Table 4.2.

Table 4.2 – Surface current data types and their coverages.

N	Type of Data	Coverage
1	Time series data at one or more stationary locations	S100_Point
2	Regularly-gridded data at one or more times	S100_Grid
3	Ungeorectified gridded data or point set data at one or more times	S100_Point
4	Time series data for one moving platform	S100_Point

4.4.1 Regular Grids

S-111 regular grid geometry is an implementation of S100_Grid Coverage (Part 8 – Imagery and Gridded Data). The spatial grids for the regular grid type are two dimensional, orthogonal, and georeferenced (with the X axis directed toward the east), and are defined by several attributes, including grid origin, spacing, and grid indexing. These parameters are explained in more detail below. A typical regular grid and some of its parameters are shown in Figure 4.2.

The attribute *dimension* is 2, and the variable *interpolationType* has the value of ‘discrete’, since there is no spatial interpolation used for surface currents.

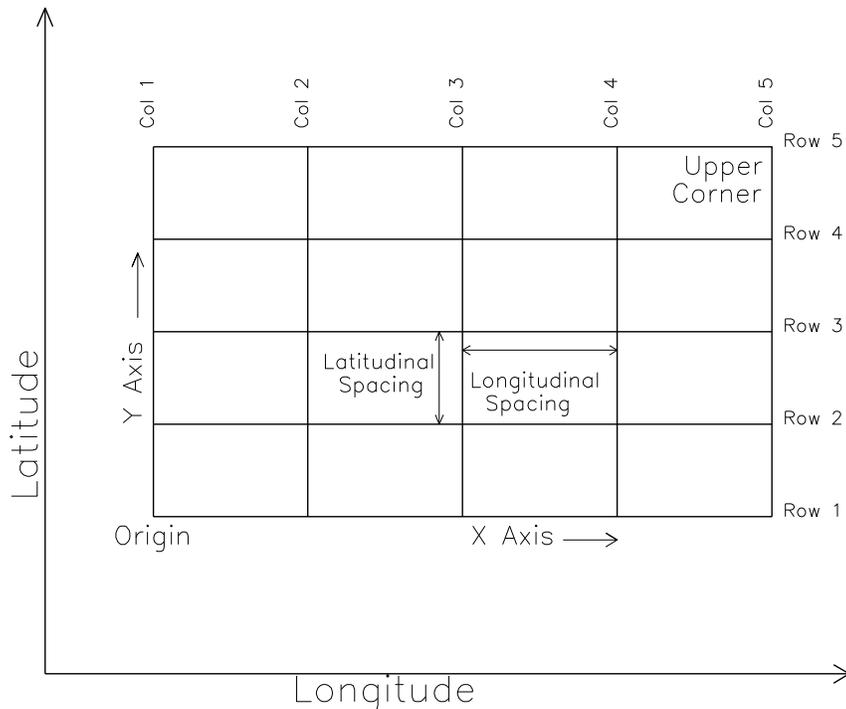


Figure 4.2 – Schematic of the regular grid and some of its attributes. The *offsetVectors* are shown as the Latitudinal Spacing and Longitudinal Spacing. The *origin* is shown at the lower left corner of the grid.

The grid is oriented to the Earth by the Coordinate Reference System (CRS), with the variable *coordinateReferenceSystem*. The *origin* contains the latitude and longitude as a *DirectPosition* and is located at the lower left (southwest) extent of the grid.

S-111 grids allow for different spacing of points along the X axis and the Y axis. For rectangular grids the offset vector establishes the cell size. The attribute *offsetVectors* carries the two vectors for grid spacing (Latitudinal Spacing and Longitudinal Spacing). The first vector is 90 degrees clockwise from CRS north, and represents the distance between grid values on the X axis. The second vector is 0 degrees clockwise from CRS north, and represents the distance between the values on the Y axis. The distances are given in degrees.

The attribute *extent* effectively defines a bounding rectangle describing where data is provided. The attribute *extent* carries two sub attributes; *low* and *high*. The sub attribute *low* carries the value “0, 0” to indicate the start of the extent is the southwest (lower left) corner of the grid. The sub attribute *high*, carries the value of the highest position along the X axis and the highest position along the Y axis. Together they form the grid coordinate of the upper right corner.

The sequence rule for a regular cell size grid is straightforward. When the cells are all of the same size, the cell index can be derived from the position of the Record within the sequence of Records. The attribute *sequencingRule* has two subattributes; *type* and *scanDirection*. The sub attribute *type* carries the value “linear”, and the subattribute *scanDirection* carries the value “X, Y”. Together with the value “0, 0” stored in the attribute *startSequence*, they indicate that for S-111 the grid values along the X axis at the lowest Y axis position are stored first, starting with the left most value going right, followed by the values along the X axis at the next increment

upward along the Y axis, and so on till the top of the Y axis. The last value in the value sequence of the grid will be at the top rightmost position in the grid. In the figure, first all columns in row 1 are selected, then all columns in row 2, and so on.

4.4.2 Points

The S-111 Point Coverage is quite flexible and is used herein to describe three broad categories of spatial data: one or more current stations at fixed locations, ungeorectified gridded data, and drifting platform data.

For this type of data (Figure 4.3), the *axisNames* are the same as for the regular grid. However, the *origin* is arbitrary, and the *extent* (cf. the bounding rectangle) may be defined by the minimum and maximum of the geographic positions of the stations. The total number of locations (tidal current stations, ungeorectified grid points, or drifter locations) must be specified. Also, attributes like spacing and scan direction have no meaning. The position of the locations is carried in the one-dimensional arrays X and Y.

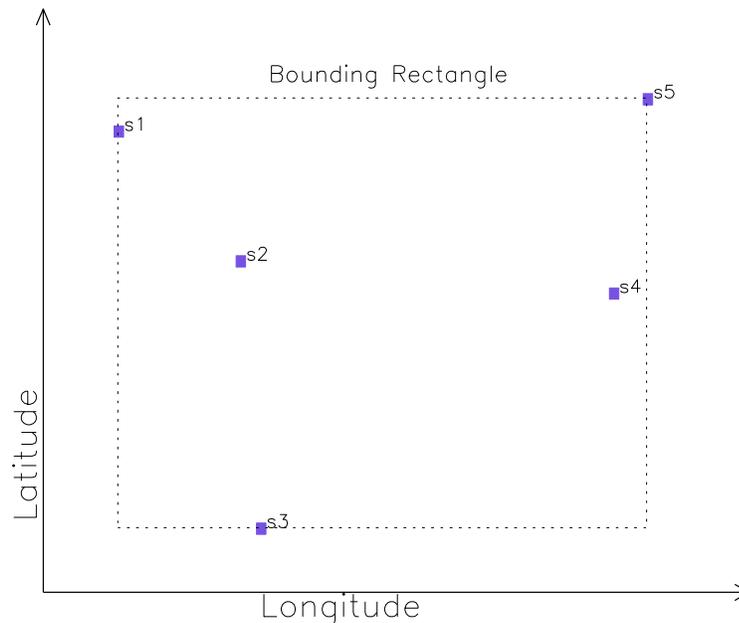


Figure 4.3 – Schematic of the point coverage and some of its attributes. Stations, or nodes in an ungeorectified grid, appear as filled-in rectangles, are labeled and have a format such as 's1'.

4.4.3 Summary

The spatial schema information from the previous two sections is summarized in Table 4.3.

Table 4.3 – Attributes and their values for S100_Grid Coverage and S100_Point Coverage.

Attribute	Value	Remarks
S100_Grid Coverage		
dimension	2	
origin	gridOriginLongitude, gridOriginLatitude	Values from Carrier Metadata
axisNames	'Longitude','Latitude'	
offsetVectors	gridSpacingLongitudinal, gridSpacingLatitudinal	Values from Carrier Metadata
extent: low	'0, 0'	
extent: high	'numROW-1, numCOL-1'	Values from Carrier Metadata
sequencingRule: type	'linear'	
sequencingRule: startSequence	'0, 0'	
commonPointRule	'average'	
interpolationType	'discrete'	There is no spatial interpolation for surface currents
rangeType	name:data type	Pairs which describes an attribute type included in the range of the coverage: e.g., 'surfaceCurrentSpeed: real'
S100_Point Coverage		
domainExtent	EX_GeographicExtent (ISO 19115)	Envelope based on all longitudes and all latitudes.
axisNames	'Longitude','Latitude'	
rangeType	name:data type	Pairs which describes an attribute type included in the range of the coverage
metadata	URI	Link to metadata
commonPointRule	'average'	
geometry	GM_Point	
value	Real number	Corresponds to speed and direction values

5. COORDINATE REFERENCE SYSTEMS (CRS)

The location of a feature in the S-100 standard is defined by means of coordinates, which relate a feature to a position. The S-111 CRS is a compound system, with a two-dimensional ellipsoidal horizontal component and a one-dimensional datum-related vertical component (cf. S-100, Part 6 – Coordinate Reference Systems).

5.1 Horizontal Reference System

For an ENC the horizontal CRS must be the ellipsoidal (geodetic) system EPSG: 4326 (WGS84). The full reference to EPSG: 4326 can be found at www.epsg-registry.org.

Horizontal coordinate reference system:	EPSG: 4326 (WGS84)
Projection:	None
Coordinate reference system registry:	EPSG Geodetic Parameter Registry
Date type (according to ISO 19115):	002- publication
Responsible party:	International Association of Oil and Gas Producers (IOGP)

5.2 Vertical Reference System

The vertical coordinate is directed upward (i.e., away from the Earth's center) from its origin, the vertical datum, and has units of metres. That is, a positive value for the level of the current relative to the vertical datum means that the level is above the vertical datum. This is consistent with the bathymetric CRS in S-102. The vertical datum is not an ellipsoid but is one of the following: (a) the sea surface (defined in Clause 1.4.2), (b) a vertical, sounding, or chart datum (MSL, LAT, etc.), or (c) the sea floor. Since these vertical datums can have significant spatial variation, there may be a comparable spatial variation in data quality. Any quality measure may represent a regional average or an extreme 'worst case' value.

5.3 Temporal Reference System

The temporal reference system is the Gregorian calendar for date and UTC for time. Time is measured by reference to Calendar dates and Clock time in accordance with ISO 19108:2002, Temporal Schema clause 5.4.4. A date variable will have the following 8-character format: *yyyymmdd*. A time variable will have the following 7-character format: *hhmmssZ*. A date-time variable will have the following 16-character format: *yyyymmddThhmmssZ*.

6. DATA QUALITY

6.1 Assessment of Data

Data quality allows users and user systems to assess fitness for use of the provided data. Data quality measures and the associated evaluation are reported as metadata of a data product. This metadata improves interoperability with other data products and provides usage by user groups that the data product was not originally intended for. The secondary users can make assessments of the data product usefulness in their application based on the reported data quality measures.

The prescribed precision (see ANNEX A – DATA CLASSIFICATION AND ENCODING GUIDE) of current speed (0.01 kn) and direction (0.1 arc-deg) is close to the perceived accuracy of the data, but the increased precision is useful for time integration of current vectors and for the computation of spatial gradients (i.e., non-navigational uses).

Important factors in the quality of surface current data for navigation consists of the quality of

- the observed data,

- the predicted/forecast data,
- the positional data, and
- the time stamp.

Factors determining the accuracy of the data are shown in Table 6.1. Information of the quality of the components of the data is normally available in field survey reports, QC analyses, or other technical reports.

Table 6.1 – Data types and accuracy factors

Type of Data	Factors Influencing Accuracy
Observed Current	Accuracy of the sensors Processing techniques
Predicted/forecast Current	Quality of input data Timeliness of input data Mathematical modelling techniques Accuracy of harmonic constants
Horizontal Position	Accuracy of geolocation techniques Model grid accuracy
Vertical Position	Accuracy of vertical datum
Time stamp	Sensor accuracy Data time tagging accuracy

Data quality measures for the entire data set are included in Table 12.2. These include *speedUncertainty*, *directionUncertainty*, *horizontalUncertainty*, *verticalUncertainty*, and *timeUncertainty*.

6.2 Additional Components

Additional data quality measures include Completeness, Logical Consistency, Thematic Accuracy, Aggregation, and Usability.

Completeness consists of commission and omission of data. For surface current data in gridded form, there is likely to be an excess of data for a region. For observed or historical, there is likely to be a dearth of data. In each case, missing data or points over land are tagged with a unique value. A Surface Current coverage data set is complete when the grid coverage value matrix contains direction and speed values or the null value for every vertex point defined in the grid, and when all of the mandatory associated metadata is provided. See ANNEX E - TESTS OF COMPLETENESS (NORMATIVE).

Logical Consistency ensures that the data are stored in a consistent manner: the HDF structure used to hold the data is was designed to enforce such consistency. In addition, the placement of current arrow symbols is consistent with the accepted coastline so that the centroid of the arrow is place within the water domain (see Figure 9.1), and if the water depth is zero, the symbol is not shown.

Thematic Accuracy insures that the values represented (speed and direction) are representative of the true situation. Measurement and modeling errors may put limits on these values.

Aggregation describes global quality values relate to a particular dataset. For surface currents, each dataset will be evaluated separately.

Usability will be continually assessed through user and manufacturer response to the symbols and analysis presented in the latest Product Specification.

7. DATA CAPTURE AND CLASSIFICATION

The Surface Current product contains data processed from sensors or derived from the output from mathematical models. In most cases, the data collected by the HO must be translated, sub-setted, reorganized, or otherwise processed to be made into a usable data format.

7.1 Data Sources

Surface current data comes primarily from a few specific sources: observations, astronomical predictions, analyses, and forecast models. When such data are produced and quality-controlled by an HO, they are suitable for inclusion in the Surface Current data product. See ANNEX F – SURFACE CURRENT DATA.

Observational Data Observational surface current data comes initially from *in situ* sensors in the field (e.g. current meters or drifting platforms) or from high-frequency radar, and such sensors are monitored by the HO. After reception, the data are quality-controlled and stored by the HO. Some of the observed data may be available for distribution within minutes of being collected and are thus described as being in real time. Other data may be days or years old, and are called historical data.

Astronomical Predictions Astronomical predictions are produced when a sufficiently long time series of observed currents has been obtained and the data has been harmonically analyzed by the HO to produce a set of amplitude and phase constants. There may be a single set of constants to represent flood and ebb currents along a principal direction, or two sets of constants to represent the northward and eastward components of the current. The harmonic values can then be used to predict the astronomical component of the current as a time series covering any desired time interval. In addition, the harmonic constants may be used to estimate tidal currents for a generic tidal cycle, with the specific amplitude and direction of the current based on the tide range at a specified nearby tide station, and the specific phase of the current based on the time of high water at the same nearby tide station. Data such as these may be available for single stations or, if the stations are numerous, they may be arranged by the HO into a gridded field or a tidal atlas.

Analyzed and Hybrid Values Analyzed current values may be produced from sea-surface topography, data assimilation, statistical correlations, or other means. A hybrid method combines two or more approaches.

Hindcast and Forecast Data Hydrodynamic models numerically solve a set of fluid dynamic equations in two or three dimensions, and rely on observational data, including water levels and winds, to supply boundary conditions. Model grids may be either regular or ungeorectified. Such

models are often run several times per day, and in each run there is usually a hindcast and a forecast. The hindcast is a model simulation that attempts to recreate present conditions by using the most recent observational data, while a forecast is a simulation made for many hours into the future using predicted winds, water levels, etc. The results are saved for a limited number of times, and are stored as arrays that derive from the model's grid. These models and methods are developed, run, and monitored by the HO.

These descriptions are summarized in Table 7.1.

Table 7.1 – Types of surface current data, based on the source of the data.

Type	Name	Code	Description
1	Historical observation	O	Observation made hours, days, etc., in the past
2	Real-time observation	R	Observation no more than a few minutes old
3	Astronomical prediction	A	Value computed using harmonic constants only
4	Analysis or hybrid method	Y	Calculation by statistical or other indirect methods, or a combination of methods
5	Hydrodynamic model hindcast	M	Gridded data from a two- or three-dimensional dynamic simulation of past conditions using only observed data for boundary forcing
6	Hydrodynamic model forecast	F	Gridded data from a two- or three-dimensional dynamic simulation of future conditions using predicted data for boundary forcing

7.2 The Production Process

Nearly all available information on surface currents available from the HO must be reformatted to meet the standards of this Product Specification (Clause 10). This means (a) populating the carrier metadata block (Clause 12.3) with the relevant data and (b) reorganizing the speed and direction data when using the encoding rules (see also ANNEX G – HDF5 ENCODING).

7.2.1 Metadata

Metadata is derivable from the information available from the HO. Recall that the definition of uncertainty (Sec. 1.3.2) is based on the 95% confidence level. The following variables may require additional processing:

- The bounding rectangle is computable from either the distribution of stations or nodes, or from grid parameters
- Position uncertainties may be available from the HO's metadata; otherwise they must be calculated
- Speed and direction uncertainties, if specified as a single value for the dataset, may be available from the HO; otherwise they must be calculated

7.2.2 Surface Current Data

Observational currents and astronomical tidal current predictions at a single location and gridded forecast data must normally be reformatted to fit the S-111 standard. The following may require additional calculations:

- Current depth values for modeled data grid points and for observational data (such as for moored current meters) may be require re-referencing to a different vertical datum.
- For gridded data, if a land mask array is included, the mask value is substituted into the gridded values as appropriate.
- Time stamps, if given in local time, must be converted to UTC.

7.2.3 Digital Tidal Atlas Data

Tidal atlas information may require additional processing to produce a time series. A tidal atlas typically contains speed and direction information for a number of locations, the valid time of which is expressed as a whole number of hours before and after time of high water, or current flood, at a reference tidal water level station (Table F.1). The speed and direction for any time are computed as a function of the daily predicted tides or currents at the reference station. The conversion into a time series is the responsibility of the HO.

8. MAINTENANCE

8.1 Maintenance and Update Frequency

Surface currents change rapidly, so more-or-less continual revision or updating of the data is essential. For real-time observations, new values are periodically collected (on the order of once every 5 minutes). For a forecast, the entire field of currents is created one or more times per day. New issues of real-time observations or forecasts are not considered new editions, but new datasets. New editions may occur in predicted time series data.

Tidal atlas or harmonic constant data are updated much less often, typically on an annual basis. Table 8.1 summarizes this information.

Table 8.1 – Typical update/revision intervals and related information for S-111 products produced by a single HO.

Data Types	Interval	Number Of Spatial Locations	Number Of Time Values Per Location
Harmonic Constant Tidal Predictions	1 year	100 to 1,000	8,760 (hourly data)
Model Forecasts	6 hr	100,000 to 1,000,000	1 to 24
Real-time Observations	0.1 hr	1 to 10	1 to 240
HF Radar Observations	0.1 hr	10,000 to 100,000	1 to 24

NOTE: Because of the possibility of hourly release of new datasets, the ECDIS system must check on the availability of new data at a similar frequency.

8.2 Data Source

Data is produced by the HO by collecting observational values, predicting astronomical tides, or running analysis or hindcast/forecast models. These data are typically quality-controlled and reformatted to conform to file size limitations and the S-111 standard encoding.

8.3 Production Process

S-111 data sets, including the metadata and the coverages for current speed and direction, are updated by replacement of the entire data product. HOs routinely collect observational data and maintain an analysis and/or forecast capability. When new data become available (often several times per day), the data is reformatted and made available for dissemination.

9. PORTRAYAL

9.1 Introduction

This section describes means of displaying surface current vectors to support navigation, route planning and route monitoring. Two types of data are discussed in depth. They are:

point data, which would apply to historical data, astronomical predictions, and real-time data at a small number of locations, and

sets of multiple points, which would apply to analyses, coastal radar observations, and model-based hindcasts and forecasts. For multiple point data, the current vector portrayal characteristics used for single-point data can be adapted to displaying data at individual points.

For example, a point portrayal may be provided to display currents at significant locations such as turning points or where real-time observations are available. A multiple-point portrayal may be provided for voyage planning where a mariner's selection of routes may be influenced by an overview of the currents. Note that not each portrayal category (single point and multiple point) may be available for all types of currents data (historical observations, real-time observations, astronomical predictions, and forecast total currents).

All recommended sizes are given assuming a minimum size ECDIS display of 270 by 270 mm or 1020 by 1020 pixels.

9.2 Display of Current at a Single Point

Portrayal of current using single point data should be used for instances where the data source is a current meter (e.g., a historical or real-time current measuring device) at a single geographic location. **9.2.1 Arrow Shape**

The generalized arrow shape must be created using the input dimensions shown (Figure 9.1) and scaled according to the current speed and the display area. This shape is unique and so does not conflict with existing arrow and arrow-like shapes previously approved for use in ECDIS (Figure 9.2).

The arrow's 'pivot point' is located on the arrow symbol along the vertical centreline and is at a distance from the bottom equal to one-half the quantity 'al'. The pivot point is placed at the corresponding position (longitude and latitude) on the chart image.

The arrow must be drawn with a black border so that the symbol stands out against backgrounds of similar colours.

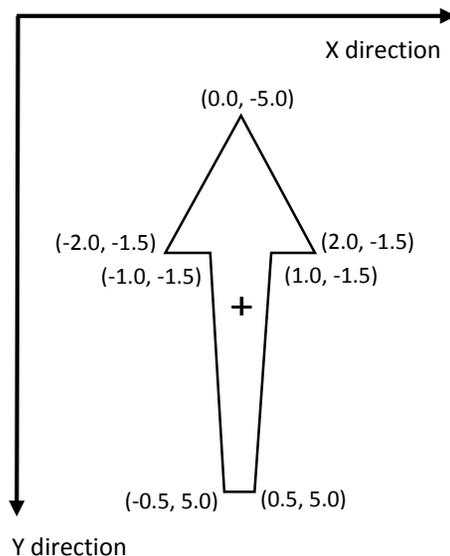


Figure 9.1 – Standard arrow symbol for use in representing surface currents. The coordinates of the vertices (x, y) are shown in mm. The '+' shows the location of the pivot point at (0.0, 0.0) and the y axis is pointing downward. Maximum height is 10 mm and maximum width is 4 mm.

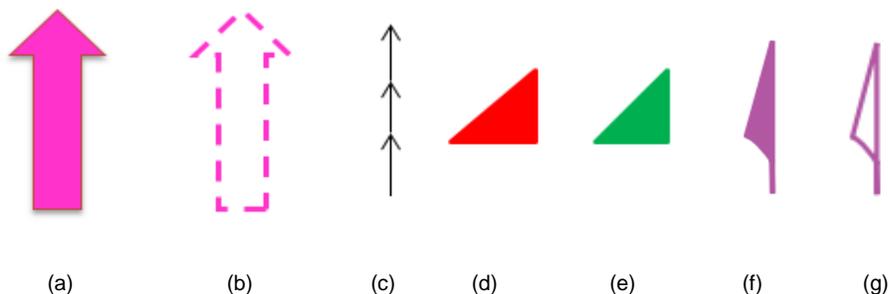


Figure 9.2 – Existing arrow types and approximate colours approved for use in ECDIS: (a) and (b) for traffic separation schemes, (c) for recommended (one-way) tracks, (d) and (e) for conical buoys, and (f) and (g) for magnetic variation and anomaly.

9.2.2 Arrow Direction

The direction of the arrow symbol must be the direction (relative to true north) toward which the current is flowing (Figure 9.3). If the map projection is Mercator, angles are preserved, so current direction is identical to direction on the screen. For other map projections, the portrayed direction must be computed.

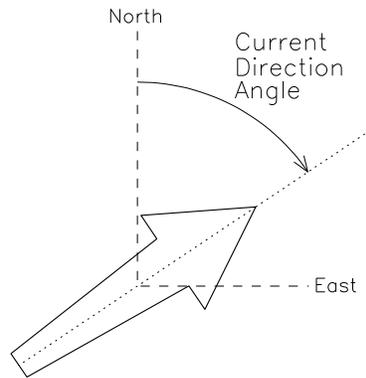


Figure 9.3 – Portrayal of the arrow's direction, based on the current direction. The dashed line is the arrow's centerline, and the origin of the East-North axis is at the arrow's pivot point. True north has a direction of 0 degrees.

9.2.3 Arrow Colour and Speed Bands

The colour of the arrow must be based on the speed value of the data, and must have 9 bands corresponding to the speed ranges (Table 9.1). The range of speeds (Table 9.1) was selected to (a) emphasize differences at low speeds (0.0 to 3 kn), and (b) be capable of displaying large currents (13 kn and above).

NOTE: The largest tidal currents may be those in the strait near Saltstrumen, Norway, which reach 22 kn.


Table 9.1 – Speed ranges (knots) for the 9-band display.

Speed Band	Minimum Speed (kn)	Width of Band (kn)
1	0.00	0.50
2	0.50	0.50
3	1.00	1.00
4	2.00	1.00
5	3.00	2.00
6	5.00	2.00

7	7.00	3.00
8	10.00	3.00
9	13.00	99.99

Colours are associated with each speed band, and must be distinguishable in the three viewing environments: day, dusk, and night. Color values for day conditions are shown in Table 9.2. Colours for dusk and night conditions are given in ANNEX H – COLOUR TABLES. (The monitor gamma values need to be taken into account – refer to IHO standards).

Table 9.2 – Colour schema for day conditions.

Speed Band	Colour	Colour Scale Intensity			Hex RGB	Displayed Colour
		Red	Green	Blue		
1	purple	118	82	226	7652E2	
2	dark blue	72	152	211	4898D3	
3	light blue	97	203	229	61CBE5	
4	dark green	109	188	69	6DBC45	
5	light green	180	220	0	B4DC00	
6	yellow-green	205	193	0	CDC100	
7	orange	248	167	24	F8A718	
8	pink	247	162	157	F7A29D	
9	red	255	30	30	FF1E1E	

9.2.4 Arrow Size

The arrow size (height and width) must be a function of the current speed, and for a given speed must be the same regardless of the source of the data. The standard arrow symbol (Figure 9.1) is scaled up or down in size, depending on the speed it is intended to represent.

Let S represent the value of the current speed. An upper limit on the size of the arrow is imposed by requiring the scaling input speed value not to exceed a reference high value, S_{high} . The recommended value for S_{high} is the lower limit value in the highest group in Table 9.2, which is 13.0 kn. The value of S_{high} should be the same for all data sets from multiple sources so that the same speed in different data will be displayed with the same arrow length.

It is desirable to display a small arrow at a location where data is usually available (e.g., a grid point) but the speed is less than 0.01 kn. This can be accomplished by setting a minimum reference speed, S_{low} , so that, as a result, a 'point' is displayed. When the speed S falls below S_{low} , then S_{low} is substituted for S .

A third parameter is the reference speed, S_{ref} , at which the arrow symbol has a length equal to the scaling height parameter, H_{ref} . Here S_{ref} is chosen to be 5 kn and H_{ref} is taken to be 10.0 mm. Let S be the current speed to be displayed. If S exceeds S_{high} , then S_{high} is substituted for that speed, since areas of extremely high current speeds are rare and are likely to be avoided by navigators anyway. Therefore, a current with a speed of S will be displayed with a height, H (mm), computed by:

$$H = H_{ref} \cdot \min\{\max(S_{low}, S), S_{high}\} / S_{ref} \quad [\text{Eqn. 9.1}]$$

The arrow width is scaled in a similar fashion. A summary of recommended scaling values is given in Table 9.3.

Table 9.3 – Summary of recommended values for arrow display size (see Eqn. 9.1). With these values, an arrow representing 5 kn will have a length of 10 mm.

Constant	Description	Recommended Value
H_{ref}	Reference height for arrow scaling	10 mm
S_{ref}	Reference speed for arrow scaling	5 kn
S_{low}	Minimum speed to be used for arrow length computations	0.01 kn
S_{high}	Maximum speed to be used for arrow length computations	13 kn

9.2.5 Numerical Values

Current speed and direction, and additional data related to uncertainty and other metadata, should be visible when selected by placing the cursor within the solid area of the arrow shape (Figure 9.4). The data are invisible initially, and when the cursor is placed on the arrow, the data will be shown temporarily. If the arrow is clicked, data will be shown continuously until another point is clicked. The information shown when the arrow is clicked will be displayed in black text inside a box with a white (or other colour for dusk and/or night viewing) background and a black border with a 1 pixel line thickness. The box must have zero transparency.

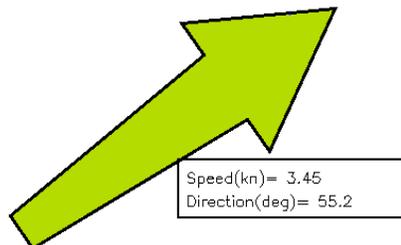


Figure 9.4 – Example of the display of the first level of numerical information available by cursor selection. Note: Arrow length is not to scale.

There should be at least three levels of detail of information (Table 9.4). In the first level, speed (kn) and direction (arc-degrees clockwise from true north) shall be displayed. In the second level, there are six additional items, each with appropriate units: data source/station name, latitude, longitude, date, time, and current depth or layer thickness. In the third level, there are at least five additional items: uncertainty in speed, direction, horizontal position, vertical position and time. A sample image showing a vector with the first level of information is shown in Figure 9.4. The additional levels are accessed by a cursor pick capability (cf. S-101. IHO Electronic Navigational Chart Product Specification).

Table 9.4 – Sample of numerical information displayed in text at the location of a current vector,

organised into levels of priority.

Priority Level	Text Information Displayed
1	Speed, Direction
2	Data source or station name, Latitude, Longitude, Depth of current, Valid Date, Valid Time
3	Uncertainty in speed, Uncertainty in direction, Uncertainty in horizontal position, Uncertainty in vertical position, Uncertainty in time

NOTE: The text box in Figure 9.4 requires the use of two additional colours: black for the text and box outline, and white for the interior of the box. Standard ISO colours are to be used. The interior of the box will have zero transparency.

9.2.6 Transparency

The symbol transparency must be adjusted according to the background chart/image used (Table 9.5). The value alpha represents the level of opaqueness (relative to the background image) of the arrow and the numerical values displayed. An alpha value of 1 denotes zero transparency and an alpha value of 0 denotes 100% transparency.

Table 9.5 - Alpha (opaqueness) values for arrows with various display backgrounds. Transparency is 1.0 minus the alpha value.

Background	Alpha
Satellite image	1.0
Raster Nautical Chart	1.0
ENC Day	1.0
ENC Dusk	0.4
ENC Night	0.2

9.2.7 Scalable Vector Graphics

In ECDIS, the arrow symbol (e.g. Figure 9.5) is drawn using Scalable Vector Graphics (SVG) instructions. SVG allows a symbol of any given size, orientation, and colour to be displayed by only a few instructions. The coordinate system for the symbol is defined as follows. The overall width and height of the symbol are defined in mm. The viewBox covers the range of coordinates used for the symbol. The pivot point of the symbol is designed to be at the 0.0, 0.0 position. The default coordinate system used for S-100 SVG has the origin in the upper left corner with the x-axis pointing to the right and the y-axis pointing down.

For example, the using the image coordinates shown in Figure 9.1b, the SVG coordinate system, and L_{ref} of 10 mm, a 'path' command would contain

M -0.5, 5. L -0.5, 5.0 -1.0,-1.5 -2.,-1.5 0.,-5.0 2.0,-1.5 1.0,-1.5 0.5,5.0 -0.5, 5.0 Z

where M is the *moveto* instruction, L is the *lineto* instruction, and Z denotes the end of the drawing. The coordinates are given in mm. See ANNEX I – SCALABLE VECTOR GRAPHICS for more details.

9.2.8 Symbol Placement

The arrow symbol is placed on the georeferenced background so that the pivot point of the symbol (Figure 9.1) is positioned at the geographic coordinates of the current station or grid point.

NOTE 1: The HO must insure that the arrow's pivot point does not lie on the displayed representation of land, i.e., that the current data and the shoreline are consistent.

NOTE 2: The HO must insure that the arrow's pivot point does not lie in a geographic area designated as intertidal when the time-varying water depth has gone to zero.

However, since some stations or grid points are near land, and depending on arrow size, on occasion it is unavoidable that occasionally some part of the arrow symbol will overlie the land or intertidal area.

9.3 Display of Regularly Gridded Data

The display of gridded data depicts a surface current field of multiple arrows (Figure 9.5), with each individual arrow having the qualities described in Clause 9.2. The acceptable arrowhead style for gridded arrows is the style defined in Figure 9.1. As with single-point data, the speed and direction values at individual vectors must be available when the cursor is placed over a vector.

NOTE: current direction angles cannot be interpolated (in either space or time) directly, but must be derived using the X and Y components of speed. That is, interpolation must be of the east/west and north/south components of speed separately, with the interpolated components then used to calculate speed and direction.

9.3.1 High Resolution

A high-resolution display (i.e., zooming in) of regularly gridded data display produces a lower density of data (Figure 9.6). It is not recommended that spatial interpolation be used to estimate current values at locations between grid points or point coverage locations.

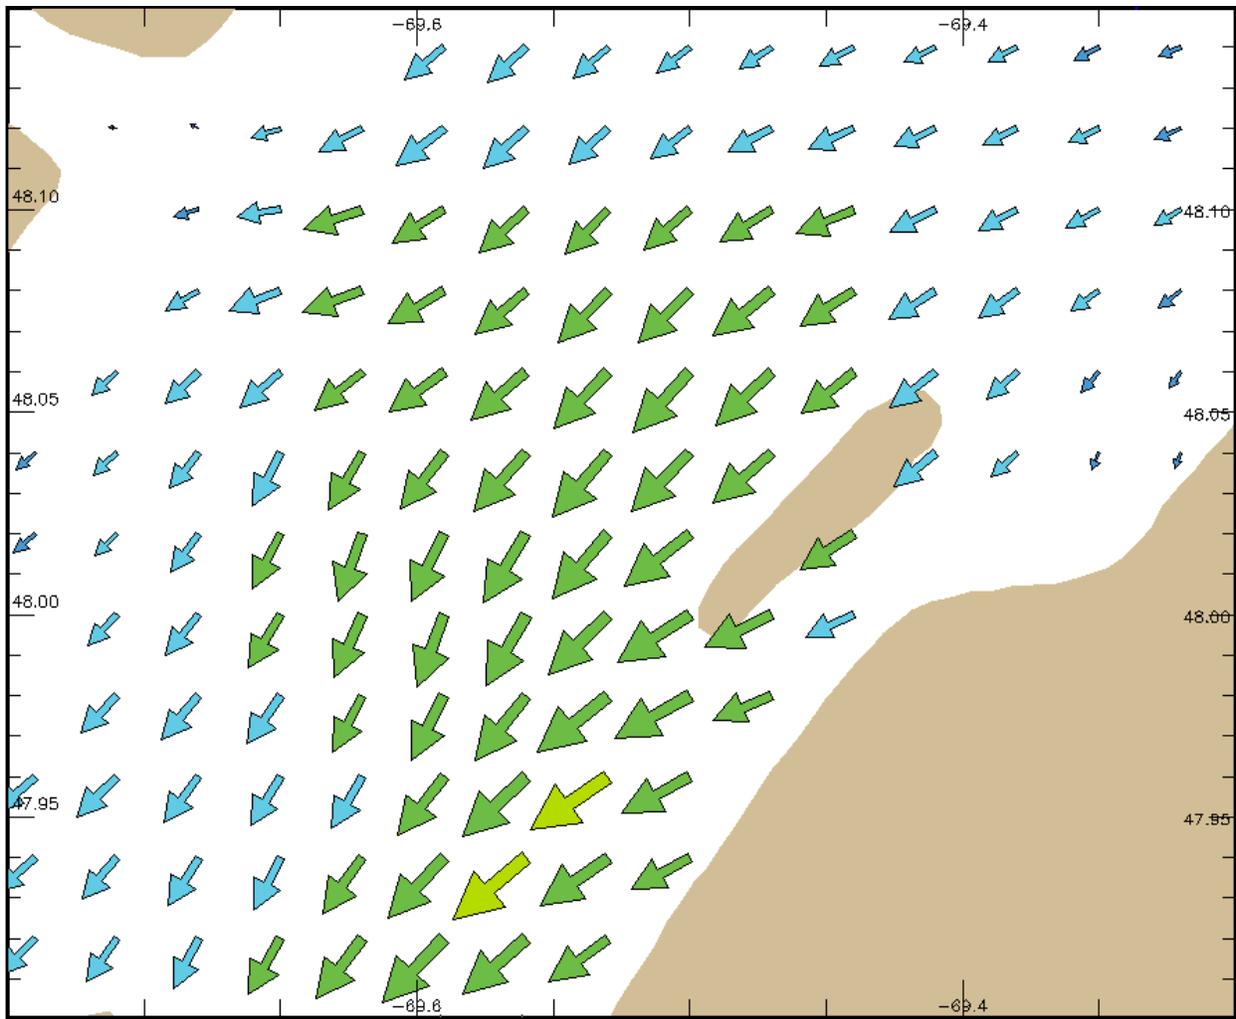


Figure 9.5 - Arrows representing gridded surface current data, with length increasing with speed, and S_{ref} is 5 kn, H_{ref} is 20 mm, and the maximum speed in the data in the image is 3.15 kn. Coastline added for clarity. Note that although some portions of the arrow symbol lie over land, the pivot point does not.
 (data courtesy of St. Lawrence Global Observatory, Canada)

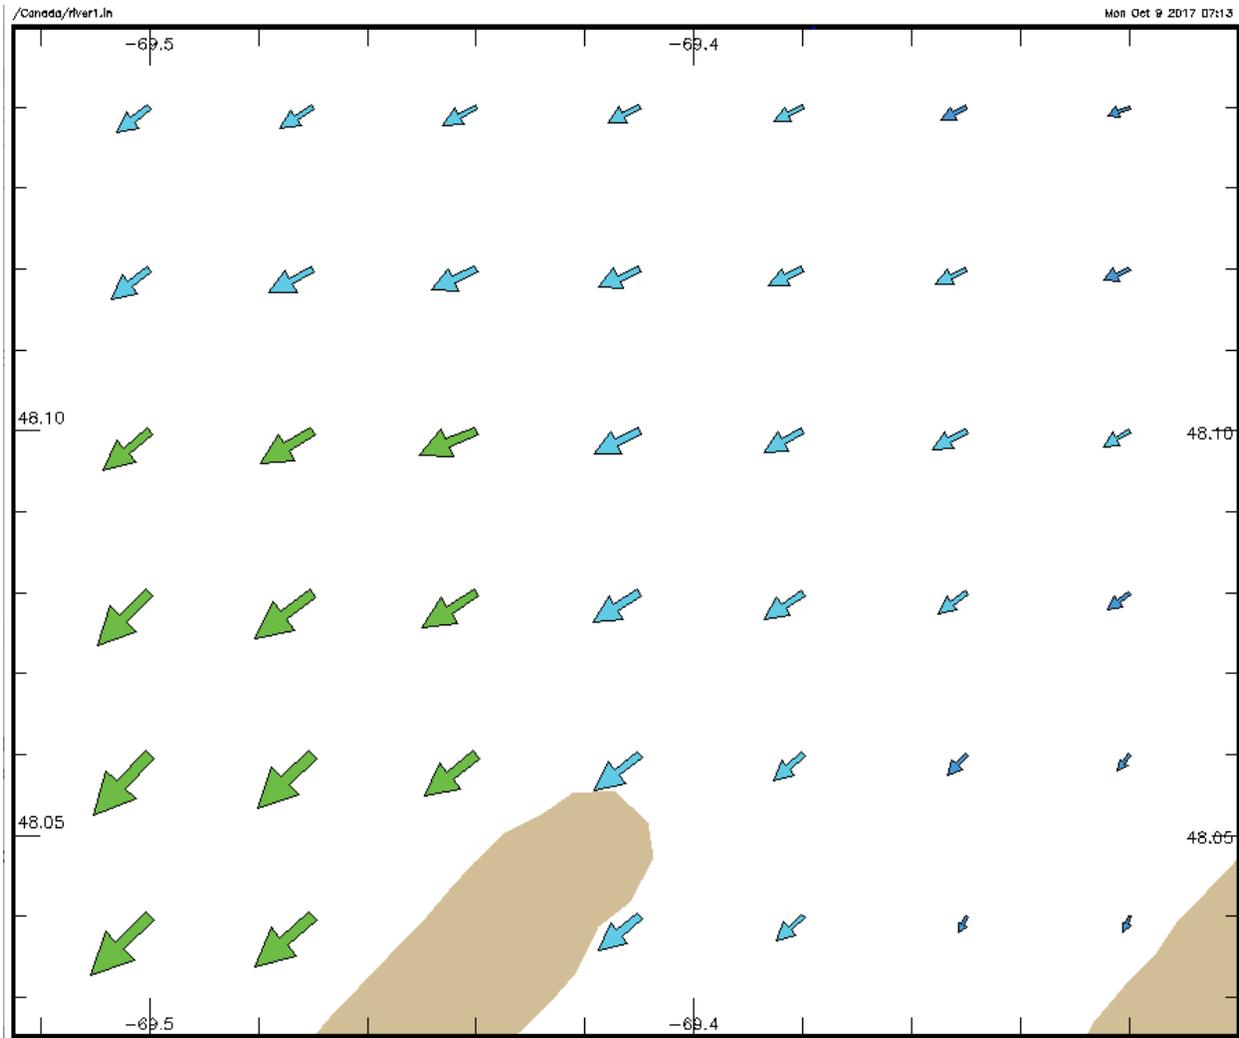



Figure 9.6 – Display of surface current data (see Figure 9.5) but at a higher resolution (data courtesy of St. Lawrence Global Observatory, Canada).

9.3.2 Low Resolution


Displaying at a low resolution (i.e., zooming out) increases the density of symbols (Figure 9.7a). However, by applying a thinning algorithm, the number of vectors may be reduced (Figure 9.7b). In this case, every fourth vector was plotted.

An example of thinning of regularly gridded data is as follows. Suppose that the grid cell's diagonal as displayed has a distance of D mm and represents the grid spacing. Note that D is dependent on the specific geographic area and the size of the viewing monitor. If every n^{th} cell is displayed, the displayed spacing is nD . Next, suppose the length of the arrow representing the maximum speed in the displayed field is L_{smax} mm. Then the ratio of the maximum arrow length to the displayed grid spacing is constrained to be less than a prescribed maximum value, R_{max} , here taken to be 0.5. Thus

$$R = L_{\text{smax}}/(nD) \leq R_{\text{max}} \quad [\text{Eqn. 9.2}]$$

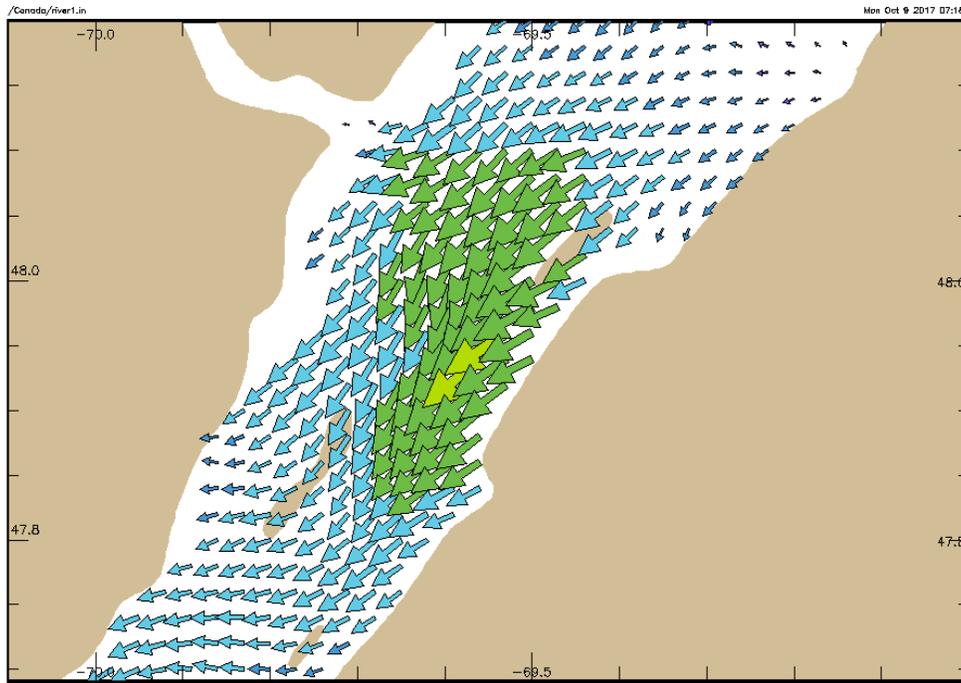

(a)

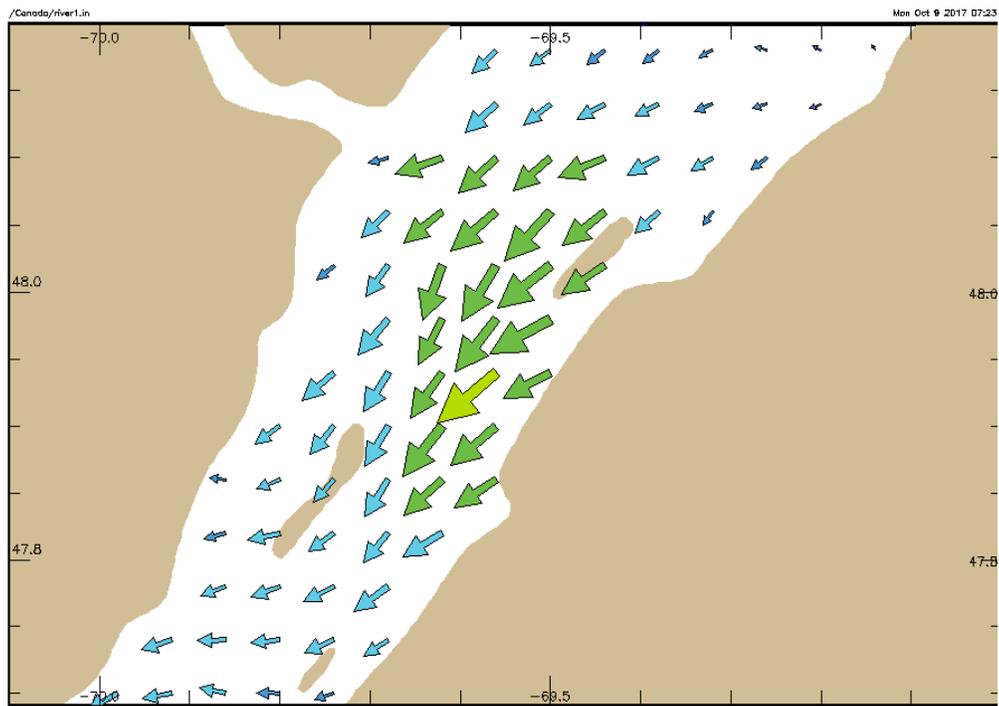

(b)

Figure 9.7 – (a) Surface current vectors (see Figure 9.6) displayed with identical parameters, but at low resolution. (b) Current vectors as in (a), but ‘thinned’ by plotting every fourth point. Note that the coastline data in the figure may differ from that used to determine model boundaries; in practice, the arrow pivot point must not be placed over land. (data courtesy of St. Lawrence Global Observatory, Canada).

If the above inequality cannot be met with increment n equal to 1, then a new value for n is computed by the following formula:

$$n = 1 + \text{fix}(L_{\text{smax}}/(\text{DR}_{\text{max}})) \quad [\text{Eqn. 9.3}]$$

where $\text{fix}()$ is a function that returns the truncated integer value. For plotting, arrows at every n^{th} column and every n^{th} row are drawn, making sure that the row and column with the maximum vector is drawn (Figure 9.7b).

Thinning of irregularly-spaced vectors is more difficult. For each on-screen point the distance to all other on-screen points would have to be calculated, so that the closest point can be determined. The size and direction of the arrow symbols at the point and its nearest point would be compared for overlap. If overlap occurred, one of the symbols would be eliminated. This procedure would be carried out for all on-screen points, keeping track of which points and their symbols had been eliminated. An alternate solution would be to reduce the reference height H_{ref} or increase the reference speed S_{ref} (Table 9.3).

9.4 Temporal Rules

The metadata variables related to time are the *dateTimeOfFirstRecord*, *dateTimeOfLastRecord*, *timeRecordInterval*, and *numberOfTimes*. The time selected for display (i.e., past, present, or future) of the surface currents by the display system will typically not correspond exactly to the timestamp of the input data. For a correct display, the ECDIS will have to select the correct data.

For data with only a single record (where the timestamp of the earliest value equals that of the latest value) such as real-time data, the surface current values are displayed only if the display time is later than the timestamp and the absolute time difference between the display time and the data timestamp is less than a discrimination interval (e.g., 5 minutes). For a single record, the variable *timeRecordInterval* (see Clause 12.3) can be used to set the discrimination interval.

For data with multiple times, if the selected display time is later than the first timestamp and earlier than the last timestamp, then the closest but immediately preceding values in the data are displayed. However, if the selected display time is earlier than the first timestamp then the data is not displayed. If the selected time is later than the last timestamp, then surface current values at that time are displayed only if the absolute time difference between the display time and the data timestamp is less than a discrimination interval (e.g., the value of the variable *timeRecordInterval*).

9.5 Placement of Legend

The legend, which is to be displayed as an option, must show the relationship between the arrow colours and the speed values. A sample is shown in Figure 9.8. The precise position of the legend if it appears on the monitor will be determined so as to minimize the obscuring of other important navigational information.

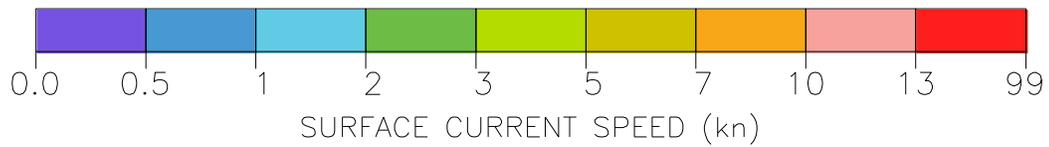


Figure 9.8 – Sample surface current speed scale based on the colours and speed bands in Table 9.1.

9.6 Interoperability

Interoperability principles determine priority in display of elements so that important image elements, such as depth numerals, are not obscured by current vectors. Surface current portrayal will conform to interoperability rules as they are established.

Symbol Priority

Details about symbol priority will be determined in accordance with S-100 standards when they are developed.


One example involves the use of the older charting symbol for currents. When an S-111 dataset is displayed, symbols from the S-101 ECDIS nautical charting suite, in the area where the new data is displayed, must not be displayed. Such symbols include those for tidal stream tables (plus their points and boundary areas), flood and ebb tide stream arrows and their values and boundary areas, and other symbols for rip currents, eddies, breakers, and non-tidal currents.

Colour Discrimination

Another criterion is that the arrows colours be distinct when displayed against a background of similar colour. Table 9.6 shows the background colours for various water depth types, and Figure 9.9 shows typical arrows for the nine speed bands. The black arrow border allows the arrow symbol to stand out against the blue and green backgrounds.

Table 9.6 - Chart background colours in two colour scales
(courtesy of Korean Hydrographic and Oceanographic Administration).

Name	sRGB			xyL			Displayed Colour
	Red	Green	Blue	x	y	L	
Deep Water	201	237	255	0.28	0.31	80	
Medium Deep Water	167	218	252	0.26	0.29	65	
Medium Shallow Water	130	202	255	0.23	0.25	55	
Very Shallow Water	97	184	255	0.21	0.22	45	
Intertidal	88	175	156	0.26	0.36	55	
No Values	147	174	187	0.28	0.31	40	

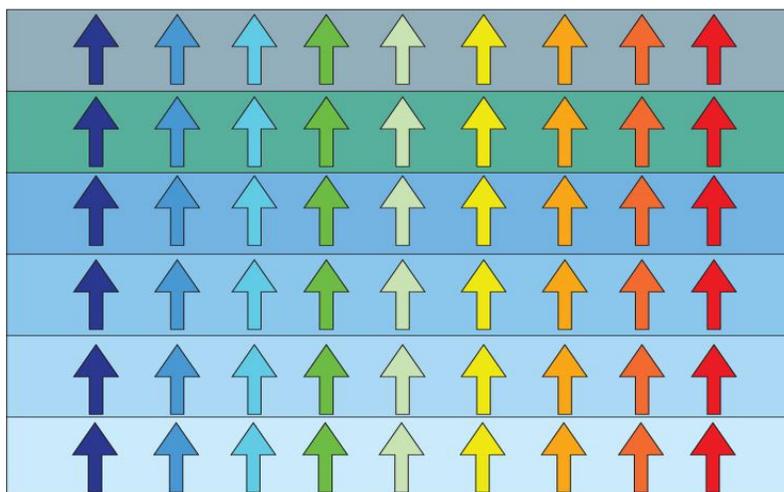

(a)



(b)

Figure 9.9 – Arrows displayed against the (daytime) background colours in Table 9.6. (a) Arrows with borders and (b) without borders. (Figures courtesy of University of New Hampshire)

9.7 Sample Representation

Surface currents vectors comprise a layer to be displayed on demand and, possibly, on top of other data and layers. Consideration must be made so as not to obscure critical navigational

data nor create confusion by using symbols or colours similar to those in other layers. Figure 9.10 shows a sample display.

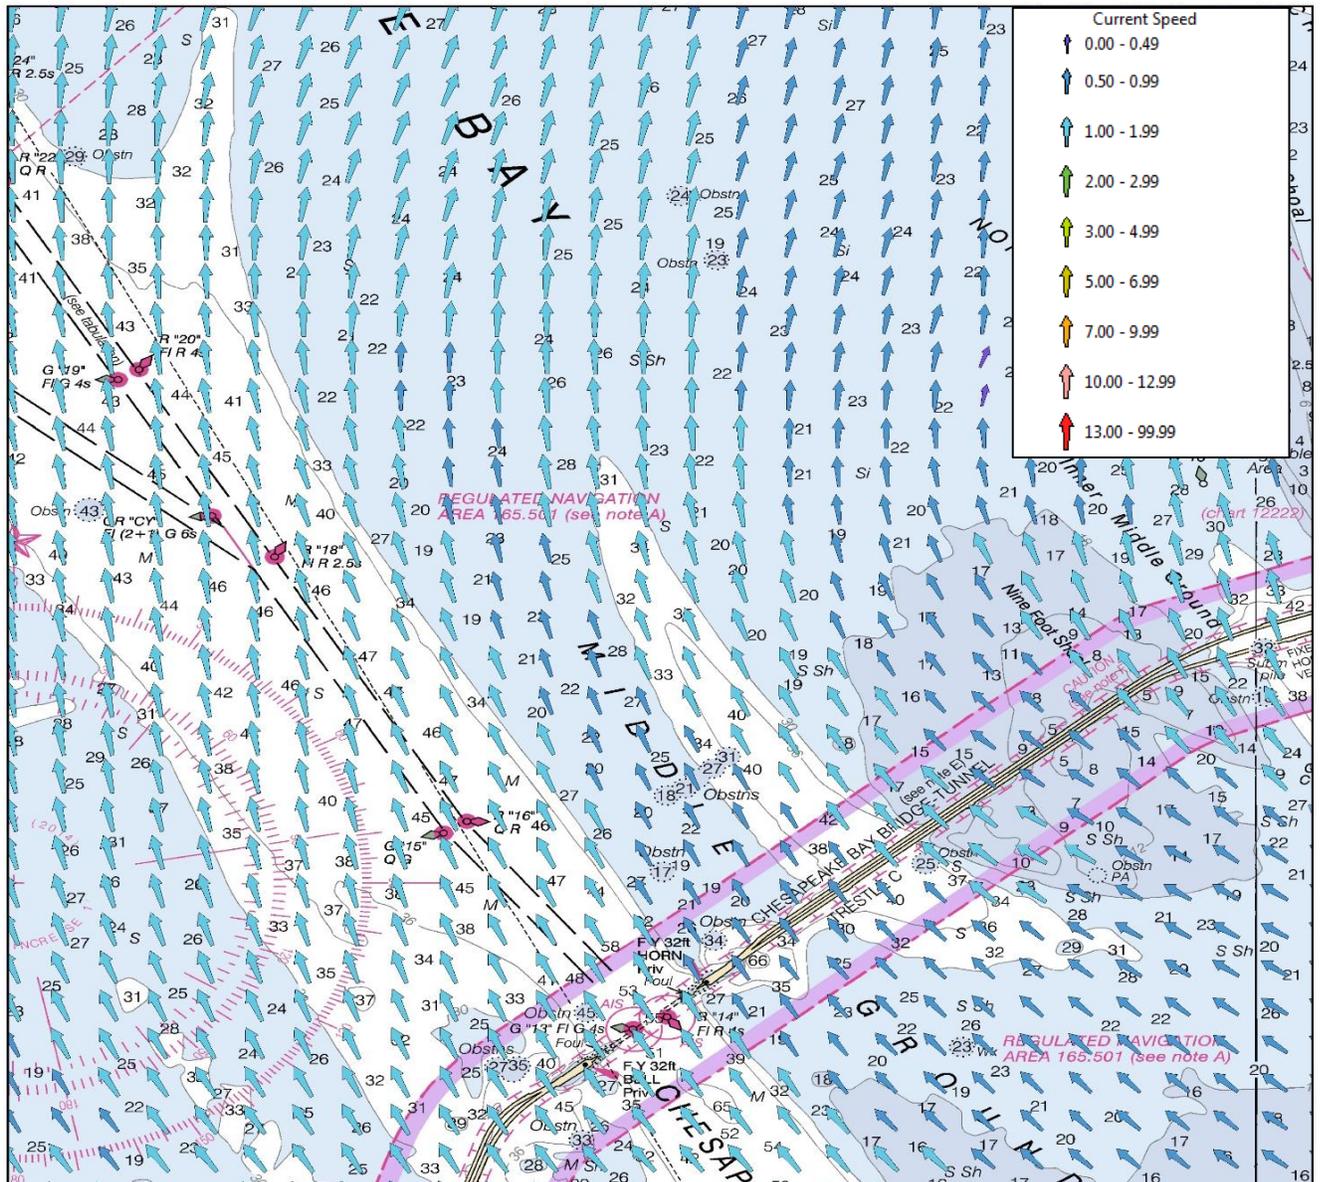


Figure 9.10 – Sample depiction of gridded surface current data in an electronic chart. Note that arrow height in scale may not strictly conform to the portrayal rules. (Image courtesy of the Univ. of New Hampshire, US).

9.8 Portrayal Rules

A summary of the portrayal rules appears in ANNEX J – SURFACE CURRENT PORTRAYAL RULES.

10. DATA PRODUCT FORMAT (ENCODING)

10.1 Introduction

The Surface Current Data Product must be encoded using the Hierarchical Data Format standard, Version 5 (HDF5).

Format Name: HDF-5
Character Set: MD_CharacterSetCode (ISO 19115)
Specification: S-100 profile of HDF-5

The key idea at the core of the S-111 data product structure is this: the organization of the information is substantially the same for each of the four types of surface current data, but the information itself will be interpreted differently. These data types and their codes are shown in Table 10.1.

Table 10.1 – S-111 data types and values of the variable *dataCodingFormat*.

Type of Data	dataCodingFormat
Time series data at one or more fixed stations	1
Regularly-gridded data at one or more times	2
Ungeorectified gridded data or point set data at one or more times	3
Time series data for one moving platform	4

For the use of HDF5, the following key concepts (10c-5.1) are important:

- *File* - a contiguous string of bytes in a computer store (memory, disk, etc.), and the bytes represent zero or more objects of the model;
- *Group* - a collection of objects (including groups);
- *Dataset* - a multidimensional array of data elements with attributes and other metadata;
- *Dataspace* - a description of the dimensions of a multidimensional array;
- *Datatype* - a description of a specific class of data element including its storage layout as a pattern of bits;
- *Attribute* - a named data value associated with a group, dataset, or named datatype;
- *Property List* - a collection of parameters (some permanent and some transient) controlling options in the library;
- *Link* - the way objects are connected.

In addition, a dataset may have one, two, or more dimensions, and each element in the dataset may be a compound. That is, each element may itself be an array of possibly different datatypes (float, integer, string, etc.).

10.2 Product Structure

The structure of the data product follows the form given in S-100 v. 4.0.0 – PART10C – HDF5 DATA MODEL AND FILE FORMAT. The general structure, which was designed for several S-100 products, not just surface currents, is given in Figure 10.1.

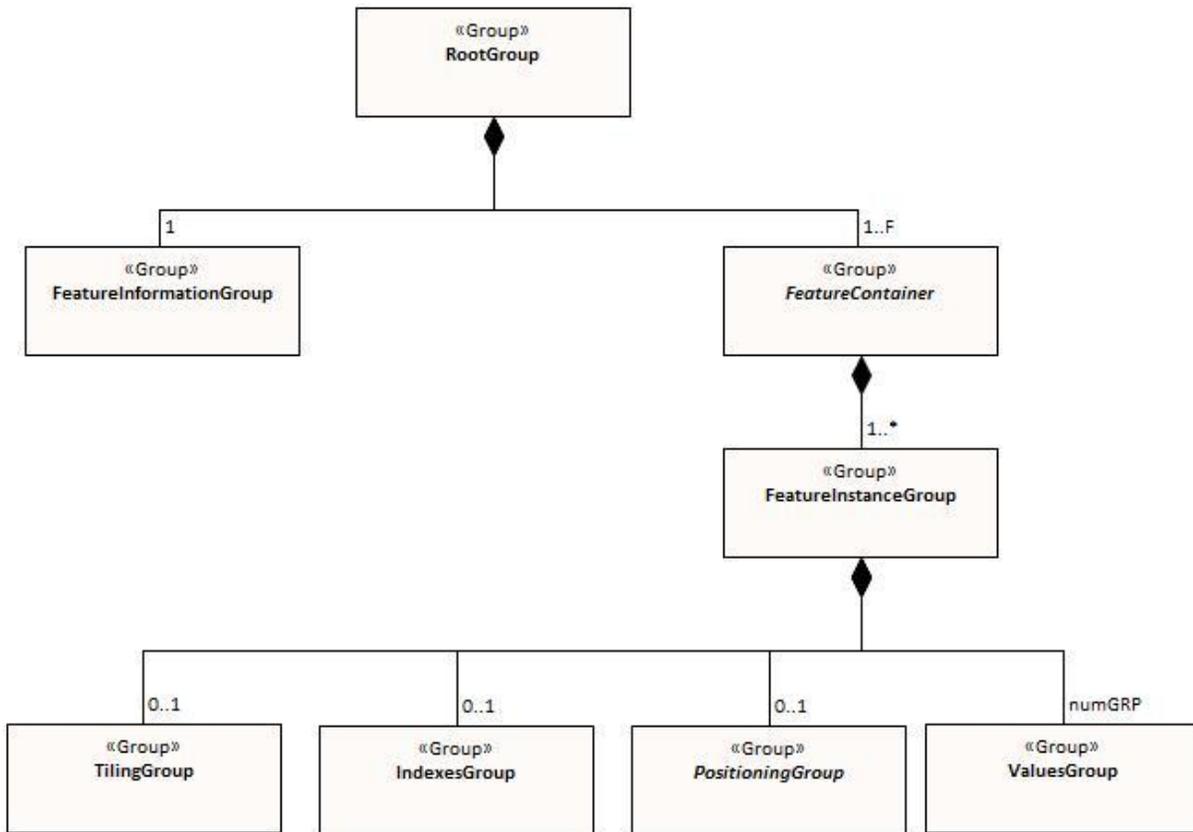


Figure 10.1 – Outline of the generic data file structure for all HDF5 formatted data files in S-100. (see Part 10c – Figure 10c-7)

Notice that in Figure 10.1 there are four levels:

Level 1 At the top level lies the Root Group, and it contains the Root Metadata (Table 12.1) and two subsidiary groups. The Root Metadata applies to all S-100 type products.

Level 2 The next Level contains the Feature Information Group and the Feature Container Group. The Feature Information Group contains the feature name (Surface Current) and the feature attribute codes. The Feature Container Group contains the Feature Metadata (Table 12.2) and one or more Feature Instance Groups. The Feature Metadata is common to all surface current products.

Level 3 This contains one or more Feature Instances. A feature instance is, for example, a time series of gridded data for a single region, or a time series of astronomical predictions for a set of stations.

Level 4 This contains the actual data for the feature. S-111 uses only the Values Group and, for only some data, the Positioning Group.

The basic structure of the S-111 data product is shown in Table 10.2.

Table 10.2 – Overview of an S-111 data product. Levels refer to HDF5 structuring. (C.f. S-100 - Part 10c, Fig. 10c-9). Naming in each box below header line is as follows: Generic name; S-100 or S-111 name, or [] if none; and (*HDF5 type*) group, attribute or attribute list, or dataset

LEVEL 1 CONTENT	LEVEL 2 CONTENT	LEVEL 3 CONTENT	LEVEL 4 CONTENT
General Metadata (metadata) (<i>h5_attribute</i>)			
Feature Codes Group_F (<i>h5_group</i>)	Feature Name SurfaceCurrent (<i>h5_attribute</i>)		
	Feature Codes featureCode (<i>h5_attribute</i>)		
Feature Type SurfaceCurrent (<i>h5_group</i>)	Type Metadata (metadata) (<i>h5_attribute</i>)		
	Horz,vert,time Axis Names axisNames (<i>h5_dataset</i>)		
	Feature Instance SurfaceCurrent.01 (<i>h5_group</i>)	Instance Metadata (metadata) (<i>h5_attribute</i>)	
		Location Data Positioning (<i>h5_group</i>)	Lon+lat Array geometryValues (<i>h5_dataset</i>)
		First data group Group_001 (<i>h5_group</i>)	Time Attribute timePoint (<i>h5_attribute</i>)
			Name Attribute Title (<i>h5_attribute</i>)
			Speed+direction Array values (<i>h5_dataset</i>)
		Second data group Group_002 (<i>h5_group</i>)	Time Attribute timePoint (<i>h5_attribute</i>)
			Name Attribute Title (<i>h5_attribute</i>)
			Speed+direction Array values (<i>h5_dataset</i>)
		Third data group Group_003 (<i>h5_group</i>)	Time Attribute timepoint (<i>h5_attribute</i>)
			Name Attribute Title (<i>h5_attribute</i>)
			Speed+direction Array values (<i>h5_dataset</i>)
	Feature Instance SurfaceCurrent.02 (<i>h5_group</i>)	Instance Metadata (metadata) (<i>h5_attribute</i>)	

The following sections explain entries in Table 10.2 in more detail.

10.2.1 Feature Codes (Group_F)

This group specifies the S-100 feature to which the data applies, and consists of two components:

featureName – a dataset with the name(s) of the S-100 feature(s) contained in the data product. For S-111, the dataset has a single element, the string “SurfaceCurrent”.

SurfaceCurrent – the feature described in the featureName. This is a dataset containing a two-dimensional array (one dimension for each of the two current attributes: speed and direction) of string values (Table 10.3).

Table 10.3 – Sample contents of the two-dimensional SurfaceCurrent array.

Name	Explanation	S-100 Attribute 1	S-100 Attribute 2
code	Camel Case Name	surfaceCurrentDirection	surfaceCurrentSpeed
name	plain text	Surface Current Direction	Surface Current Speed
uom	Units of Measurement)	Knots	arc-degrees
fillValue	Denotes missing data	-999.0	-999.0
datatype	HDF5 datatype	H5T_FLOAT	H5T_FLOAT
lower	Lower bound on attribute	0.0	0.0
upper	Upper bound on attribute	360.0	[]
closure	Open or Closed data interval. See S100_IntervalType in Part 1.	closedInterval	geSemiInterval

10.2.3 Conditional Geography Group (Positioning)

The group Positioning contains all the locations (longitude and latitude values) that have associated data values. In S-111, this group is present in the data product only for *dataCodingFormat* values of 1, 3 or 4.

The geographic values are stored in the single, one-dimensional compound array *geometryValues*, of size *numPOS*. Each element in the compound array *geometryValues* contains the pair of float values (longitude, latitude).

The value of *numPOS* and the interpretation of the kinds of locations depends on the *dataCodingFormat* as well. The values and number of stations/drifters (respectively) for each data type are explained in Table 10.4.

Table 10.4 - Values of *numPOS* for the group *Positioning*.

Data CodingFormat	Data Type	Location Data	Array Size: Value of NumPOS
1	Time Series at fixed stations	Position of current stations	<i>numberOfStations</i>
3	Ungeorectified gridded data	Location of the grid nodes	<i>numberOfNodes</i>
4	Time Series at a single moving station	Position of the station over time	<i>numberOfTimes</i>

10.2.4 Values Groups (Group_nnn)

These groups each contain a date-time stamp, and the compound data arrays containing surface current speed and direction. These components are explained below.

For regularly gridded data, the speed and direction arrays are two dimensional, with dimensions *numPointsLongitudinal* and *numPointsLatitudinal*. By knowing the grid origin and the grid spacing, the position of every point in the grid can be computed by simple formulae.

Date-Time Stamp

The date-time stamp is an attribute named *timePoint* with a single (string) value. For gridded (regular and ungeorectified: *dataCodingFormat* = 2 or 3), the time stamp is the time of validity for all points in the grid. For a time series at fixed and moving platforms, the time stamp is the time of the first value.

Data Arrays

The speed and direction values (*surfaceCurrentSpeed* and *surfaceCurrentDirection*) are stored in two dimensional arrays named *values*, with a prescribed number of columns (*numCOL*) and rows (*numROW*).

For a time series of fixed or moving stations (*dataCodingFormat* = 1 or 4), the speed and direction values will be for times in the series as determined by the starting date-time and the data time interval. Each array is virtually one-dimensional, as the number of rows is set to 1.

For a regular grid (*dataCodingFormat* = 2), the speed and direction values will be for each point in the grid, the data array *values* is two-dimensional, and for the time for all points in the grid given by the date-time stamp.

For an ungeorectified grid (*dataCodingFormat* = 3), the speed and direction values will be for each point in the grid, the data array *values* is one-dimensional, and for the time for all points in the grid given by the date-time stamp.

10.2.5 Summary of Generalized Dimensions

To summarize, there are data Groups containing the speed and direction data, which are stored in two-dimensional arrays of size *numROWS* by *numCOLS*. The total number of data Groups is *numGRPS*.

The four variables that determine the array sizes (*numROWS*, *numCOLS*, *numPOS*, and *numGRPS*) are different, depending upon which coding format is used. Their descriptions are given in Table 10.5.

Table 10.5 – The array dimensions used in the data product.

Data Coding Format	Data Type	numPOS	numCOL	numROW	numGRP
1	Fixed Stations	numberOfStations	numberOfTimes	1	numberOfStations
2	Regular Grid	(not used)	numPointsLongitudinal	numPointsLatitudinal	numberOfTimes
3	Ungeorectified Grid	numberOfNodes	numberOfNodes	1	numberOfTimes
4	Moving Platform	numberOfTimes	numberOfTimes	1	1

10.2.6 Mandatory Naming Conventions

The following group and attribute names are mandatory in S-100: Group_F, featureCode, and (for S-111) SurfaceCurrent, axisNames, Positioning, (for S-111) SurfaceCurrent.01, and group_nnn. Attribute names shown in Annex G are also mandatory.

10.3 Sample HDF5 Encoding

The product structure has been designed for compatibility with the HDF5 capabilities. The HDF5 encoding of the data set is discussed in ANNEX G – SAMPLE HDF5 ENCODING.

11. DATA PRODUCT DELIVERY

11.1 Introduction

This section describes how the Surface Current Data Product is to be delivered from the HO to the end user (i.e., navigation officer, route planner, etc.).

Method of transfer will be primarily web-based, including ftp, although some products (astronomical predictions) may be delivered via storage media. The data will be supplied either directly from the HO or through a third party supplier.

Due to the cost of transmitting data via Internet, it is desirable to limit file size and updating frequency whenever possible. The exchange dataset file size, as created by the HO and before compression, is limited to 10 MB. Two common data compression schemes are Zip and Rar (Radio acoustic ranging). In addition, the file may be encrypted.

Updating of files typically means issuing a new forecast, or disseminating the latest observed currents for a specific geographic region. This may occur several times per day. Therefore, all files must contain a date-time of issuance of the product. Because of the potentially high frequency (i.e., hourly or less) availability of new datasets, the ECDIS system must check for new data at a similar frequency.

11.2 Exchange Datasets

Exchange Sets produced by the HO consist of files containing an XML Exchange Catalogue, the HDF5 Data Products, and auxiliary files (Figure 11.1). The auxiliary files include an XML Feature Catalogue, an XML Portrayal Catalogue, SVG files, and additional supporting XML files for alarms and indications, and for interoperability.

The Data Products include one or more data sets (but of the same S-100 Product Specification types), with each product covering a specific geographic region and specific period of time. The Exchange Catalogue lists the products and contains the discovery metadata.

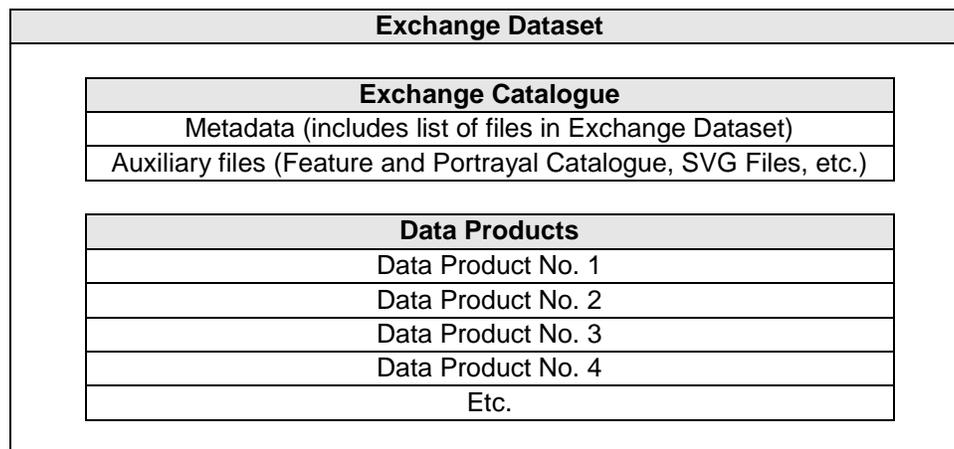


Figure 11.1 – Schematic diagram of the Exchange Dataset.

The dataset size, even after compression, is limited to 10 MB. This size was chosen due to the cost of transmitting data via the internet.

11.3 Exchange Catalogue

The exchange catalogue (normally in XML format) acts as the table of contents for the exchange set. The catalogue file of the exchange set must be named S111ed1.CAT; no other file in the exchange set may have the same name. The contents of the exchange catalogue, which includes the metadata, are described in Clause 12.

11.4 Data Product File Naming

The data product file contains both a carrier metadata block and one or more sets of speed and direction arrays (see Clause 10 – Data Product Format). There is no generally accepted file

naming convention. However, the filename extension for HDF5 (e.g., .h5 or .hdf5) must be used to denote the file format. Characters may be lower or upper case.

11.5 Support Files

This Data Product requires no support files.

12. METADATA

12.1 Introduction

For information exchange, there are several categories of metadata required:

- metadata about the overall exchange dataset and catalogue,
- discovery metadata about each of the datasets contained in the catalogue, and
- discovery metadata about the support files that make up the package.

The discovery metadata classes have numerous attributes which enable important information about the datasets and accompanying support files to be examined without the need to process the data, e.g. decrypt, decompress, load etc. Other catalogues can be included in the exchange set in support of the datasets such as feature, portrayal, coordinate reference systems, codelists etc. The attribute “purpose” of the support file metadata provides a mechanism to update support files more easily.

12.2 Discovery Metadata

An outline of the overall concept of an S-111 exchange set for the interchange of geospatial data and its relevant metadata is explained in the following figures. Figure 12.1 depicts the realization of the ISO 19139 classes which form the foundation of the exchange set. The overall structure of the S-111 metadata for exchange sets is modelled in Figures 12.2 and 12.3. More detailed information about the various classes is shown in Figure 12.4. Whether the individual metadata parameters are mandatory or optional is defined in the individual tables.

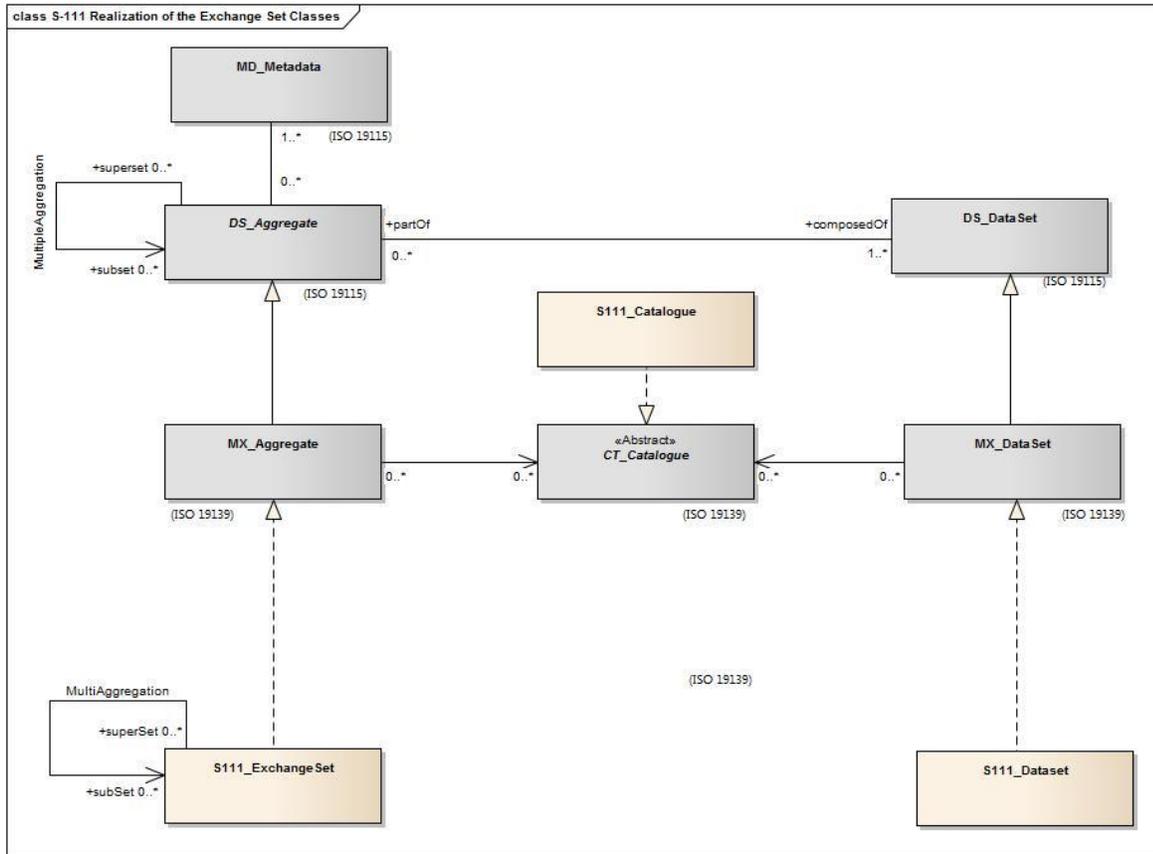


Figure 12.1 - Realization of the exchange set classes. Note that there are no support files.

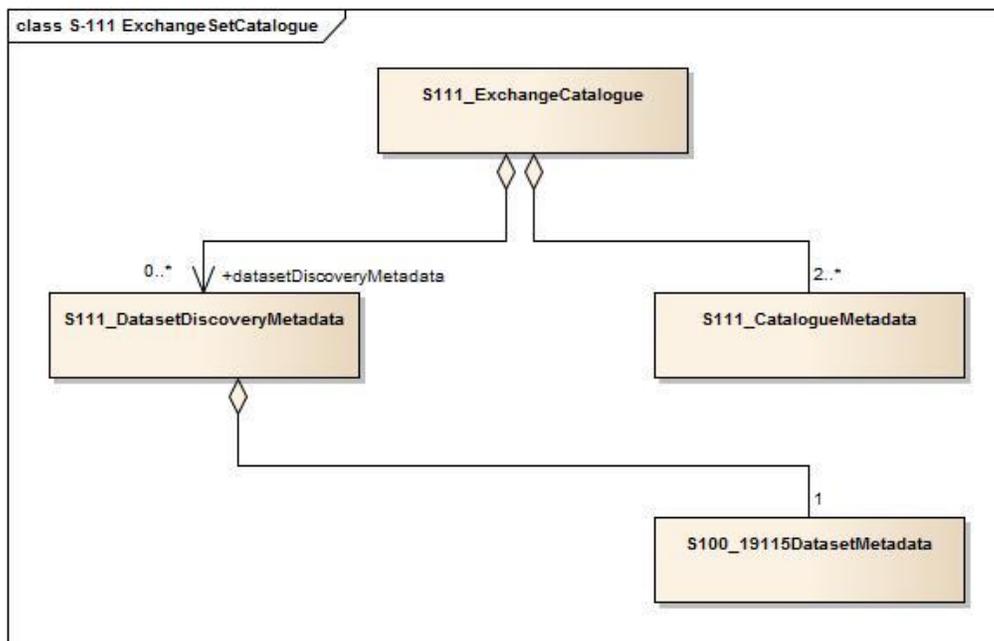


Figure 12.2 - S-111 ExchangeSet Catalogue.

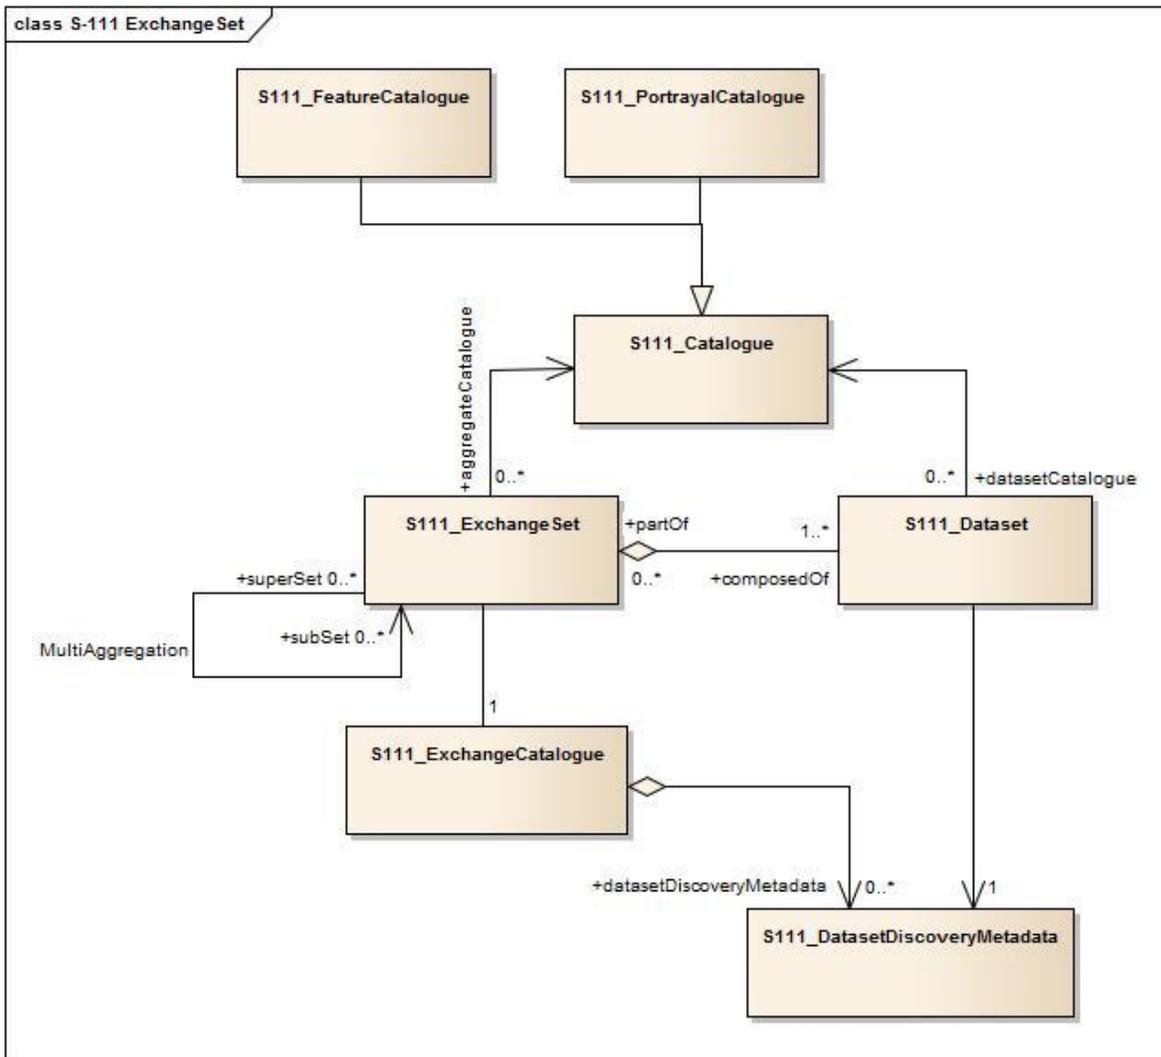


Figure 12.3 – S-111 ExchangeSet.

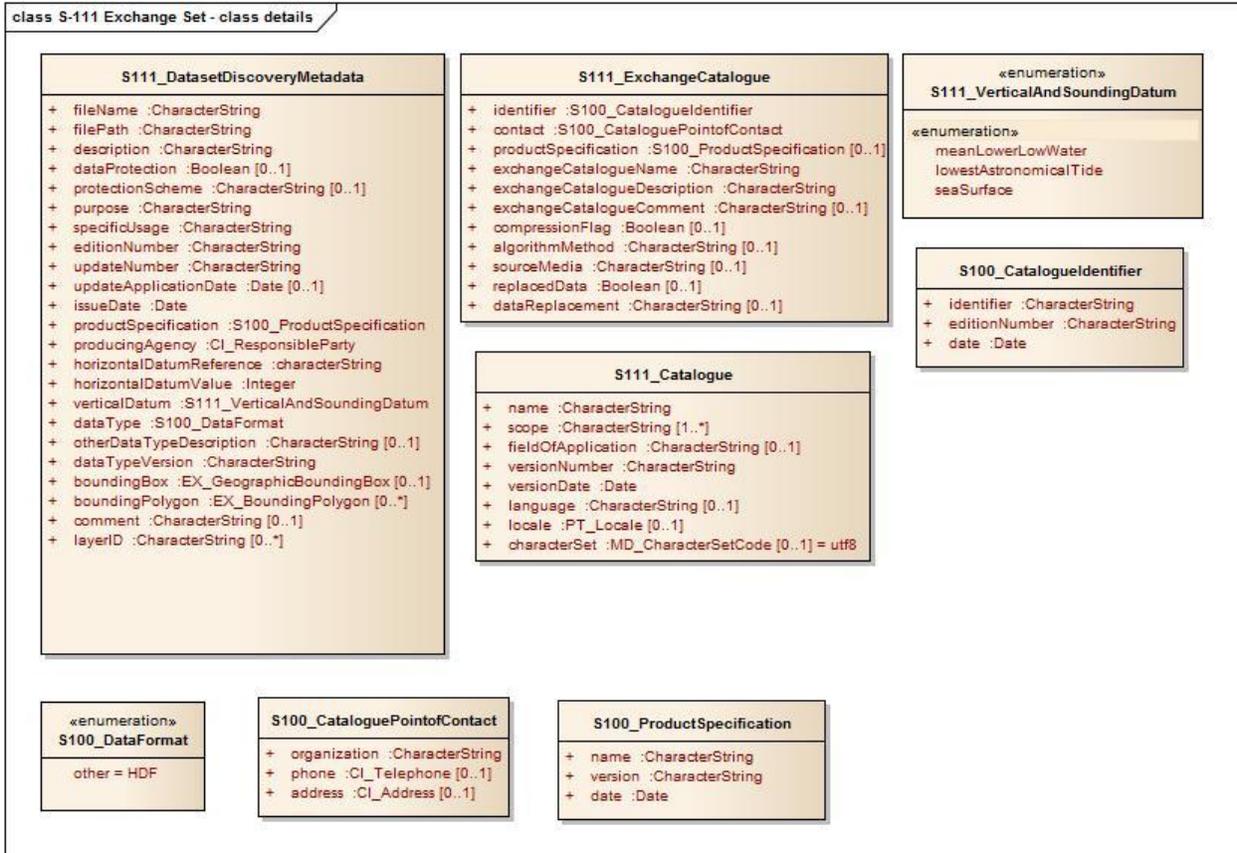


Figure 12.4 - S-111 Exchange Set: Class details.

12.2.1 S111_ExchangeCatalogue

Each exchange set has a single S100_ExchangeCatalogue which contains meta information for the data and support files in the exchange set.

Name	Description	Mult	Value	Type	Remarks
S100_ExchangeCatalogue	An exchange catalogue contains the discovery metadata about the exchange datasets and support files	-		-	-
Identifier	Uniquely identifies this exchange catalogue	1		S100_CatalogueIdentifier	
Contact	Details about the issuer of this exchange catalogue	1		S100_CataloguePointOfContact	
productSpecification	Details about the product specifications used for the datasets contained in the exchange catalogue	0..1		S100_ProductSpecification	Conditional on all the datasets using the same product specification
exchangeCatalogueName	Catalogue filename	1		CharacterString	In S-101 it would be CATLOG.101
exchangeCatalogueDescription	Description of what the exchange catalogue contains	1		CharacterString	
exchangeCatalogueComment	Any additional Information	0..1		CharacterString	
compressionFlag	Is the data compressed	0..1		Boolean	Yes or No
algorithmMethod	Type of compression algorithm	0..1		CharacterString	Eg. RAR, ZIP, h5repack
sourceMedia	Distribution media	0..1		CharacterString	
replacedData	If a data file is cancelled is it replaced by another data file	0..1		Boolean	
dataReplacement	Cell name	0..1		CharacterString	

12.2.2 S100_CatalogueIdentifier

Role Name	Name	Description	Mult	Type	Remarks
Class	S100_CatalogueIdentifier	An exchange catalogue contains the discovery metadata about the exchange datasets and support files	-	-	-
Attribute	identifier	Uniquely identifies this exchange catalogue	1	CharacterString	
Attribute	editionNumber	The edition number of this exchange catalogue	1	CharacterString	
Attribute	date	Creation date of the exchange catalogue	1	Date	

12.2.3 S100_CataloguePointofContact

Role Name	Name	Description	Mult	Type	Remarks
Class	S100_CataloguePointOfContact	Contact details of the issuer of this exchange catalogue	-	-	-
Attribute	organization	The organization distributing this exchange catalogue	1	CharacterString	This could be an individual producer, value added reseller, etc.
Attribute	phone	The phone number of the organization	0..1	CI_Telephone	
Attribute	address	The address of the organization	0..1	CI_Address	

12.2.4 S100_DatasetDiscoveryMetaData

Data in the Discovery Metadata are used to identify the relevance of the dataset to the particular application.

Name	Description	Mult	Value	Type	Remarks
S100_DatasetDiscoveryMetadata	Metadata about the individual datasets in the exchange catalogue	-		-	-
fileName	Dataset file name	1		CharacterString	
filePath	Full path from the exchange set root directory	1		CharacterString	Path relative to the root directory of the exchange set. The location of the file after the exchange set is unpacked into directory <EXCH_ROOT> will be <EXCH_ROOT>/<filePath>/<filename>
description	Short description giving the area or location covered by the dataset	1		CharacterString	E.g. a harbour or port name, between two named locations etc.
dataProtection	Indicates if the data is encrypted	0..1		Boolean	0 indicates an unencrypted dataset 1 indicates an encrypted dataset
protectionScheme	specification or method used for data protection	0..1		CharacterString	Eg S-63
digitalSignature	Indicates if the data has a digital signature	0..1		Boolean	0: unsigned 1: datafile is digitally signed [to be reconciled when S-100 finalizes digital signature elements]
digitalSignatureValue	Digital signature	0..1		CharacterString	This contains a base64 encoding of the hexadecimal numbers comprising the digital signature itself. The content of these fields are defined, along with the algorithms for their calculation, in S-63 ed2.0 Part (C). [to be reconciled when S-100 finalizes digital signature elements]
classification	Indicates the security classification of the dataset	0..1		Enumeration	One of the following from ISO 19115 MD_SecurityConstraints> MD_ClassificationCode (codelist) 1. unclassified 2. restricted 3. confidential 4. secret 5. top secret
purpose	The purpose for which the dataset has been issued	1		MD_Identification >purpose CharacterString	E.g. new, re-issue, new edition, update etc.
specificUsage	The use for which the dataset is intended	1		CharacterString	E.g. in the case of ENCs this would be a navigation purpose classification.

Name	Description	Mult	Value	Type	Remarks
editionNumber	The edition number of the dataset	1		CharacterString	When a data set is initially created, the edition number 1 is assigned to it. The edition number is increased by 1 at each new edition. Edition number remains the same for a re-issue.
issueDate	date on which the data was made available by the data producer	1		Date	
productSpecification	The product specification used to create this dataset	1		S111_ProductSpecification	
producingAgency	Agency responsible for producing the data	1		CI_ResponsibleParty	
horizontalDatumReference	Reference to the register from which the horizontal datum value is taken	1		characterString	EPSG
horizontalDatumValue	Horizontal Datum of the entire dataset	1		Integer	4326
verticalDatum	Vertical Datum of the entire dataset	1		S100_VerticalAndSoundingDatum	
soundingDatum	Sounding Datum of the entire dataset	1		Enumeration S100_VerticalAndSoundingDatum	Not relevant to S-111. Fixed value corresponding to literal localDatum from S100_VerticalAndSoundingDatum.
dataType	The encoding format of the dataset	1		S100_DataFormat	
otherDataTypeDescription	Encoding format other than those listed.	0..1		CharacterString	
dataTypeVersion	The version number of the dataType.	1		CharacterString	
dataCoverage	Area covered by the dataset	1		S100_DataCoverage	
comment	Any additional information	0..1		CharacterString	

12.2.5 S111_DataCoverage

Name	Description	Mult	Value	Type	Remarks
S100_DataCoverage		-		-	-
ID	Uniquely identifies the coverage	1		Integer	-
boundingBox	The extent of the dataset limits	1		EX_GeographicBoundingBox	-
boundingPolygon	A polygon which defines the actual data limit	1..*		EX_BoundingPolygon	-
optimumDisplayScale	The scale with which the data is optimally displayed	0..1		Integer	
maximumDisplayScale	The maximum scale with which the data is displayed	0..1		Integer	
minimumDisplayScale	The minimum scale with which the data is displayed	0..1		Integer	

12.2.5.1 EX_GeographicBoundingBox

From ISO 19115:2003 Corr. 1 (2006).

Name	Description	Mult	Type	Remarks
EX_GeographicBoundingBox	geographic position of the dataset	-	-	Defined in ISO 19115
westBoundLongitude	western-most coordinate of the limit of the dataset extent, expressed in longitude in decimal degrees (positive east)	1	Real	Arc degrees
eastBoundLongitude	eastern-most coordinate of the limit of the dataset extent, expressed in longitude in decimal degrees (positive east)	1	Real	Arc degrees
southBoundLatitude	southern-most coordinate of the limit of the dataset extent, expressed in latitude in decimal degrees (positive north)	1	Real	Arc degrees
northBoundLatitude	northern-most, coordinate of the limit of the dataset extent expressed in latitude in decimal degrees (positive north)	1	Real	Arc degrees

12.1.5.2 EX_BoundingPolygon

From ISO 19115:2003 Corr. 1 (2006).

Name	Description	Mult	Type	Remarks
EX_BoundingPolygon	boundary enclosing the dataset, expressed as the closed set of (x,y) coordinates of the polygon (last point replicates first point)	-	-	Defined in ISO 19115
polygon	sets of points defining the bounding polygon	1	GM_Object	Must be a GM_Polygon (See S-100 Part 7, ISO 19107, ISO 19136)

12.2.6 S100_VerticalAndSoundingDatum

Role Name	Name	Description	Mult	Type	Remarks
Class	S100_VerticalAndSoundingDatum	Allowable vertical and sounding datums	-		
Value	meanLowWaterSprings		-	-	1
Value	meanSeaLevel		-	-	2
Value	meanLowerLowWaterSprings		-	-	3
Value	lowestLowWater		-	-	4
Value	meanLowWater		-	-	5
Value	lowestLowWaterSprings		-	-	6
Value	approximateMeanLowWaterSprings		-	-	7
Value	indianSpringLowWater		-	-	8
Value	lowWaterSprings		-	-	9
Value	approximateLowestAstronomicalTide		-	-	10
Value	nearlyLowestLowWater		-	-	11
Value	meanLowerLowWater		-	-	12
Value	lowWater		-	-	13
Value	approximateMeanLowWater		-	-	14
Value	approximateMeanLowerLowWater		-	-	15
Value	meanHighWater		-	-	16
Value	meanHighWaterSprings		-	-	17
Value	highWater		-	-	18
Value	approximateMeanSeaLevel		-	-	19
Value	highWaterSprings		-	-	20
Value	meanHigherHighWater		-	-	21
Value	equinoctialSpringLowWater		-	-	22
Value	lowestAstronomicalTide		-	-	23
Value	localDatum		-	-	24
Value	internationalGreatLakesDatum1985		-	-	25
Value	meanWaterLevel		-	-	26
Value	lowerLowWaterLargeTide		-	-	27
Value	higherHighWaterLargeTide		-	-	28
Value	nearlyHighestHighWater		-	-	29
Value	highestAstronomicalTide		-	-	30(HAT)

12.2.7 S111_DataFormat

Role Name	Name	Description	Mult	Type	Remarks
Class	S100_DataFormat	Encoding format	-	-	
Value	HDF5	Format	1	Character	

12.2.8 S100_ProductSpecification

Name	Description	Mult	Type	Remarks
S100_ProductSpecification	The Product Specification contains the information needed to build the specified product	-	-	-
name	The name of the product specification used to create the datasets	1	CharacterString	S-111 Surface Current Product Specification
version	The version number of the product specification	1	CharacterString	1.0.0
date	The version date of the product specification	1	Date	

12.2.9 S100_CatalogueMetadata

Identifies components of the Catalogue.

Name	Description	Mult	Value	Type	Remarks
S100_CatalogueMetadata		-		-	-
filename	The name for the catalogue	1..*		CharacterString	
fileLocation	Full location from the exchange set root directory	1..*		CharacterString	Path relative to the root directory of the exchange set. The location of the file after the exchange set is unpacked into directory <EXCH_ROOT> will be <EXCH_ROOT>/<filePath>/<filename>
scope	Subject domain of the catalogue	1..*		S111_CatalogueScope	
versionNumber	The version number of the product specification	1..*		CharacterString	
issueDate	The version date of the product specification	1..*		Date	
productSpecification	The product specification used to create this file	1..*		S100_ProductSpecification	
digitalSignatureReference	Digital Signature of the file	1		CharacterString	Reference to the appropriate digital signature algorithm
digitalSignatureValue	Value derived from the digital signature	1		CharacterString	

12.2.10 S100_CatalogueScope

Role Name	Name	Description	Mult	Type	Remarks
Class	S100_CatalogueScope		-	-	-
Value	featureCatalogue				
Value	portrayalCatalogue				

12.2.11 S100_19115DatasetMetadata

Information here pertains to the data product, and repeats some of the variables in the Carrier Metadata (Clause 12.3).

Name	Description	Mult	Value	Type	Remarks
S100_19115DatasetMetadata		-		-	-
typeOfCurrentData	Type or source of current data (Table 7.1)	1		Enumeration	1: Historical observation 2: Real-time observation 3: Astronomical prediction 4: Analysis or hybrid method 5: Hydrodynamic model hindcast 6: Hydrodynamic model forecast
dataCodingFormat	Data organization index, used to read the data (Table 10.1)	1		Enumeration	1: Time series at fixed stations 2: Regularly-gridded arrays 3: Ungeorectifiedgridded arrays 4: Moving platform
methodCurrentsProduct	Methodology	1		CharacterString	Brief description of current meter type, forecast method or model, etc.
minSurfCurrentSpeed	Minimum current speed in the dataset	0..1		Real	-1.0 (unknown) or positive value (kn)
maxSurfCurrentSpeed	Maximum current speed in the dataset	0..1		Real	-1.0 (unknown) or positive value (kn)

12.3 Product Metadata

The metadata for the S-111 product is divided in three sections, corresponding to the General Metadata (Table 12.1), the Type Metadata (Table 12.2), and the Instance Metadata (Table 12.3).

Table 12.1 – General Metadata, related to the entire HDF5 file. NOTE: In addition to the 11 standard entries that apply to all S-100 products, there are two additional parameters in S-111. For the *Enumeration* data type, the entry is a single integer.

N	Name	Camel Case	Mult.	Data Type	Remarks and/or Units
1	Product specification number and version	productSpecification	1	Character	This must be encoded as 'INT.IHO.S-111.X.X', with Xs representing the version number
2	Time of data product issue	issueTime	1	Character	Time (UTC)
3	Date of data product issue	issueDate	1	Character	Date must be consistent with issueDate in discovery metadata.
4	Horizontal datum	horizontalDatumReference	1	Character	EPSG
5	Horizontal datum number	horizontalDatumValue	1	Integer	4326 (for WGS84)
6	Epoch of realization	epoch	0..1	String	Code denoting the epoch of the geodetic datum used by the CRS. E.g., G1762 for the 2013-10-16 realization of the geodetic datum for WGS84
7a	Bounding box	westBoundLongitude	1	Float	
7b		eastboundLongitude	1	Float	
7c		southBoundLatitude	1	Float	
7d		northBoundLatitude	1	Float	
8	Geographic locator	geographicIdentifier	1	Character	Description
9	Metadata file name	metadata	1	Character	Name of XML metadata file
10	Vertical datum reference	verticalDatum	1	Enumeration	See S111_VerticalAndSoundingDatum
11	Meta features	metaFeatures	1	Character	Name of metafeatures file
ADDITIONAL METADATA FOR S-111					
12	Vertical reference	depthTypeIndex	1	Enumeration	1: Layer average 2: Sea surface 3: Vertical datum (see verticalDatum) 4: Sea bottom
13	Depth value	surfaceCurrentDepth	1	Float	Layer thickness (depthTypeIndex=1), or height (depthTypeIndex=2, 3, 4) (m)

Table 12.2 – Type Metadata, pertaining to the surface current feature. NOTE: In addition to the first 7 entries that apply to all S-100 products, there are up to 8 additional parameters in S-111.

N	Name	Camel Case	Mult	Data Type	Remarks and/or Units
1	Data organization index, used to read the data (Table 10.1)	dataCodingFormat	1	Enumeration	1: Time series at fixed stations 2: Regularly-gridded arrays 3: Ungeorectified gridded arrays 4: Moving platform
2	Dimension	dimension	1	Integer	The dimension of the feature instances (usually 2 in S-111)
3	Common Point Rule	commonPointRule	1	Enumeration	The procedure used for evaluating the coverage at a position that falls on the boundary or in an area of overlap between geometric objects. 1: average 2: low 3: high 4: all 5: start 6: end
4	Horizontal position uncertainty	horizontalPositionUncertainty	1	Float	-1.0 (unknown) or positive value (m)
5	Vertical position uncertainty	verticalUncertainty	1	Float	-1.0 (unknown) or positive value (m)
6	Time uncertainty	timeUncertainty	1	Float	-1.0 (unknown) or positive value (s)
7	Number of feature instances	numInstances	1	Integer	Num. of stations, gridded forecasts, etc
ADDITIONAL METADATA FOR S-111					
8	Speed uncertainty	speedUncertainty	1	Float	-1.0 (unknown) or positive value (kn)
9	Direction uncertainty	directionUncertainty	1	Float	-1.0 (unknown) or positive value (arc deg)
10	Methodology	methodCurrentsProduct	0..1	Character	Brief description of current meter type, forecast method or model, etc.
11	Min. current speed in dataset	minDatasetCurrentSpeed	1	Float	-1.0 (unknown) or positive value (kn)
12	Max. current speed in dataset	maxDatasetCurrentSpeed	1	Float	-1.0 (unknown) or positive value (kn)
13	Type of current data (Table 7.1)	typeOfCurrentData	1	Enumeration	1: Historical observation (O) 2: Real-time observation (R) 3: Astronomical prediction (A) 4: Analysis or hybrid method (Y) 5: Hydrodynamic model hindcast (M) 6: Hydrodynamic model forecast (F)
dataCodingFormat = 1					
	(none)				
dataCodingFormat = 2					
14a	Sequencing Rule	sequencingRule.type	1	Enumeration	Method to be used to assign values from the sequence of values to the grid coordinates. Components: type: Enumeration CV_SequenceType E.g., 1 (for 'linear')
14b		sequencingRule.scanDirection	1	String	scanDirection: String <axisNames entry> (comma-separated). E.g., "latitude, longitude"
15	Interpolation Type	interpolationType	1	Enumeration	Interpolation method recommended for evaluation of the S100_GridCoverage Values: CV_InterpolationMethod (ISO 19123). For S-111, use 10 (for 'discrete')
dataCodingFormat = 3					
14	Interpolation Type	interpolationType	1	Enumeration	10 (for 'discrete')
dataCodingFormat = 4					
	(none)				

Table 12.3 – Instance Metadata, pertaining to the feature instance. NOTE: In addition to the first 7 standard entries, there are as many as 9 additional parameters in S-111, depending on the data type.

N	Name	Camel Case	Mult.	Data Type	Remarks and/or Units
1	Bounding box	boundingBox	1	Compound (Double X 4)	westBoundLongitude, eastBoundLongitude, southBoundLatitude, northBoundLatitude
2	Number of time records	numberOfTimes	1	Integer	
3	Time interval	timeRecordInterval	1	Integer	Seconds. Cf. discrimination time
4	Valid Time of Earliest Value	dateTimeOfFirstRecord	1	Character	DateTime
5	Valid Time of Latest Value	dateTimeOfLastRecord	1	Character	DateTime
6a	Vertical extent	verticalExtent.minumumZ	0..1	Float	Vertical extent of 3-d grids (not used in S-111)
6b		verticalExtent.maxumumZ	0..1	Float	Vertical extent of 3-d grids (not used in S-111)
7	Number of value groups	numGRP	1	Integer	Number of Group_nnn
dataCodingFormat = 1					
8	Number of fixed stations	numberOfStations	1	Integer	
dataCodingFormat = 2					
8	Longitude of grid origin	gridOriginLongitude	1	Double	Arc Degrees
9	Latitude of grid origin	gridOriginLatitude	1	Double	Arc Degrees
10	Vertical grid origin	gridOriginVertical	0	Double	Not used in S-111
11	Grid spacing, long.	gridSpacingLongitudinal	1	Double	Arc Degrees
12	Grid spacing, lat.	gridSpacingLatitudinal	1	Double	Arc Degrees
13	Grid spacing, vert.	gridSpacingvertical	0	Double	Not used in S-111
14	Number of points, long.	numPointsLongitudinal	1	Integer	iMax
15	Number of points, lat.	numPointsLatitudinal	1	Integer	jMax
16	Start sequence	startSequence	1	Character	"0,0" (without quotes)
dataCodingFormat = 3					
8	Number of nodes	numberOfNodes	0..1	Integer	
dataCodingFormat = 4					
8	Number of stations	numberOfStations	0..1	Integer	Always equal to 1

12.4 Language

The language used for the metadata is English.

ANNEX A. DATA CLASSIFICATION AND ENCODING GUIDE

A.1 Features

Surface Current (*surfaceCurrent*)

<u>IHO Definition:</u> FEATURE: SURFACE CURRENT: a set of value items required to define a dataset representing direction and speed of the surface water current.			
S-111 Geo Feature: Surface Current			
Primitives: S-100_Grid Coverage, S-100_PointSet			
S-111 Attribute	Allowable Encoding Value	Type	Multiplicity
Surface Current Speed	must be in decimal knots, max resolution 0.01 knot	RE	1
Surface Current Direction	must be in decimal degrees, max resolution 0.1 degree	RE	1

A.2 Feature Attributes

The number of attributes (*numberAttributes*) is 2.

1. Surface Current Speed (*surfaceCurrentSpeed*)

<p>Surface Current Speed: IHO Definition: SPEED. Rate of motion. The terms speed and VELOCITY are often used interchangeably, but speed is a scalar, having magnitude only, while VELOCITY is a vector quantity, having both magnitude and direction. Speed may either be the ship's speed through water or the SPEED MADE GOOD over ground.</p> <p><u>Unit:</u> knot (kn)</p> <p><u>Minimum Resolution:</u> 0.01 kn</p> <p><u>Format:</u> xxx.xx</p> <p><u>Examples:</u> 2.54</p> <p><u>Remarks:</u></p> <ul style="list-style-type: none">• Valid speed always non-negative• Negative number denotes land mask• 0.01 kn equals 0.5144 cm/s

1. Surface Current Direction (*surfaceCurrentDirection*)

<p>Surface Current Direction: IHO Definition: DIRECTION OF CURRENT. The direction toward which a CURRENT is flowing, called the SET of the CURRENT. Also called current direction</p> <p><u>Unit:</u> degree (of arc) (°)</p> <p><u>Minimum Resolution:</u> 0.1 °</p> <p><u>Format:</u> xxx.x</p> <p><u>Examples:</u> 298.3</p> <p><u>Remarks:</u></p> <ul style="list-style-type: none">• direction clockwise from true north• Valid direction always non-negative• Negative number denotes land mask

ANNEX B. ADDITIONAL TERMS AND DEFINITIONS

Terms that are defined in this Annex or in Clause 1.4.2 are highlighted in **bold**.

accuracy

closeness of agreement between an observed value and the true value or a reference value accepted as true

NOTE 1: A test result can be observations or measurements

NOTE 2: For positioning services, the test result is a measured value or set of values

NOTE 3: For observations and measurements, true values are not obtainable. In their place reference values which are accepted as true values are used
[ISO 19157, ISO 19116]

application

manipulation and processing of **data** in support of user requirements
[ISO 19101]

application schema

conceptual **schema** for **data** required by one or more

applications
[ISO 19101]

attribute

a named element within a classifier that describes a **range** of values that **instances** of the classifier may hold

NOTE: An **attribute** is semantically equivalent to a composition association; however, the intent and usage are normally different
[ISO/TS 19103]

named property of an entity

NOTE: Describes a geometrical, topological, thematic, or other **characteristic** of an entity
[ISO/TS 19130]

attribute <UML>

feature within a classifier that describes a **range** of values that **instances** of the classifier may hold
[ISO/TS 19103]

characteristic

abstraction of a property of an **object** or of a set of **objects**

NOTE: **Characteristics** are used for describing concepts
[ISO 1087-1, ISO 19146]

distinguishing **feature**

NOTE 1: A **characteristic** can be inherent or assigned

NOTE 2: A **characteristic** can be qualitative or Quantitative

NOTE 3: There are various classes of **characteristics**, such as the following: physical (e.g., mechanical, electrical, chemical, or biological), sensory (e.g., related to smell, touch, taste, sight, or hearing), behavioral (e.g., courtesy, honesty, or veracity), temporal (e.g., punctuality, reliability, or availability), ergonomic (e.g., physiological, or related to human safety), and functional (e.g., maximum speed of an aircraft)
[ISO 19113]

class <UML>

description of a set of **objects** that share the same **attributes**, operations, methods, relationships, and semantics

NOTE: A **class** may use a set of interfaces to specify collections of operations it provides to its environment. See: interface
[ISO/TS 19103-2]

classification

abstract representation of real-world phenomena using

classifiers

[ISO 19144-1]

classifier

a **model** element that describes behavioral and structural features

[ISO/TS 19103]

definition used to assign **objects** to legend **classes**

NOTE: **Classifiers** can be defined algorithmically or according to a set of classification system-specific rules

[ISO 19144-1]

classifier <UML>

mechanism that describes behavioral and structural features

NOTE: Classifiers include interfaces, classes, data types, and components

[ISO/TS 19103-2]

conceptual model

model that defines concepts of a universe of discourse

[ISO 19101]

confidence

accuracy of a **data** quality result

[ISO 19157]

conformance

fulfilment of specified requirements

[ISO 19105]

constraint

condition or restriction expressed in natural-language text or in a machine-readable language for the purpose of declaring some of the semantics of an element

[ISO/TS 19103]

restriction on how a link or turn may be traversed by a vehicle, such as a vehicle **classification**, or physical or temporal **constraint**

[ISO 19133]

constraint <UML>

condition or restriction expressed in natural-language text or in a machine-readable language for the purpose of declaring some of the semantics of an element

[ISO/TS 19103]

NOTE: Certain **constraints** are predefined in the UML; others may be user defined. **Constraints** are one of three extensibility mechanisms in UML. See: tagged value, stereotype

[retired version of ISO/TS 19103]

content model

information view of an **application schema**

NOTE: The term "information view" comes from the ISO Reference **model** for Open distributed processing (RM-ODP) as specified in ISO 19101-2

[ISO/TS 19129]

continuous coverage

coverage that returns different values for the same **feature attribute** at different **direct positions** within a single spatial **object**, temporal **object**, or spatiotemporal **object** in its **domain**

NOTE: Although the **domain** of a **continuous coverage** is ordinarily bounded in terms of its spatial and/or

temporal extent, it can be subdivided into an infinite number of **direct positions**
[ISO 19123]

coverage domain

Consists of a collection of **direct positions** in a coordinate space that may be defined in terms of up to three spatial dimensions as well as a temporal dimension.
[Springer 2012]

curve

one-dimensional **geometric primitive**, representing the continuous **image** of a line

NOTE: The boundary of a **curve** is the set of **points** at either end of the **curve**. If the **curve** is a cycle, the two ends are identical, and the **curve** (if topologically closed) is considered to not have a boundary. The first **point** is called the start **point**, and the last is the end **point**. Connectivity of the **curve** is guaranteed by the *continuous image of a line* clause. A topological theorem states that a continuous **image** of a connected set is connected
[ISO 19107]

data

reinterpretable representation of **information** in a formalized manner suitable for communication, interpretation, or processing
[ISO 19115]

data product specification

detailed description of a **dataset** or **dataset series** together with additional **information** that will enable it to be created, and supplied to and used by another party

NOTE: A **data product specification** provides a description of the universe of discourse and a specification for mapping the universe of discourse to a **dataset**. It may be used for production, sales, end-use, or other purpose
[ISO 19131]

data type

a descriptor of a set of values that lack identity (independent existence and the possibility of side-effects)

EXAMPLE: Integer, Real, Boolean, String, and Date

NOTE: **Data types** include primitive predefined **types** and user-definable **types**

[ISO/TS 19103]

specification of a value **domain** with operations allowed on values in this **domain**

EXAMPLE: Integer, Real, Boolean, String, and Date

NOTE 1: **Data types** include primitive predefined **types** and user-definable **types**

NOTE 2: A **data type** is identified by a term, e.g., Integer. Values of the **data types** are of the specified value **domain**, e.g., all integer numbers between -65 537 and 65 536. The set of operations can be +, -, *, and /, and is semantically well defined. A **data type** can be simple or complex. A simple **data type** defines a value **domain** where values are considered atomic in a certain context, e.g., Integer. A complex **data type** is a collection of **data types** which are grouped together. A complex **data type** may represent an **object** and can thus have identity

[ISO 19118]

data value

an **instance** of a **data type**; a value without identity

NOTE: A value may describe a possible state of an **object** within a **class** or **type (domain)**

[ISO/TS 19103]

dataset

identifiable collection of **data**

NOTE: A **dataset** may be a smaller grouping of **data** which, though limited by some **constraint** such as spatial extent or **feature type**, is located physically within

a larger **dataset**. Theoretically, a **dataset** may be as small as a single **feature** or **feature attribute** contained within a larger **dataset**. A hard-copy map or chart may be considered a **dataset**

NOTE: The principles which apply to **datasets** may also be applied to **dataset series** and reporting groups
[ISO 19101, ISO 19115, ISO 19117]

dataset series

collection of **datasets** sharing the same **product**

specification

[ISO 19115]

datum

parameter or set of parameters that define the **position** of the origin, the scale, and the orientation of a **coordinate system**

NOTE 1: A **datum** defines the **position** of the origin, the scale, and the orientation of the axes of a **coordinate system**

NOTE 2: A **datum** may be a geodetic **datum**, a **vertical datum**, an engineering **datum**, an **image datum**, or a temporal **datum**

[ISO 19111, ISO 19116]

depth

distance of a **point** from a chosen reference surface measured downward along a line perpendicular to that surface

NOTE: A **depth** above the reference surface will have a negative value

[ISO 19111]

element <XML>

basic **information** item of an XML document containing child **elements**, **attributes**, and character **data**

NOTE: From the XML **information** set: "Each XML document contains one or more **elements**, the boundaries of which are either delimited by start-tags and end-tags, or, for empty **elements**, by an empty-element tag. Each **element** has a **type**, identified by name, sometimes called its *generic identifier* (GI), and may have a set of **attribute** specifications. Each **attribute** specification has a name and a value."

[ISO 19136]

elevation

the altitude of the ground level of an object, measured from a specified vertical datum.

[IHO:S100 GFM]

encoding

conversion of **data** into a series of codes

[ISO 19118]

error

discrepancy with the universe of discourse

[ISO 19138]

feature catalog

catalog containing definitions and descriptions of the **feature types**, **feature attributes**, and feature relationships occurring in one or more sets of geographic **data**, together with any **feature** operations that may be applied

[ISO 19101, ISO 19110]

feature type

classifier for **features**, defined by the set of **characteristic** properties that all **features** of this type carry

[ISO 19109]

class of **features** having common **characteristics**

[ISO 19156]

format

a language construct that specifies the representation, in character form, of **data objects** in a record, file, message, storage device, or transmission channel

[ISO 19145]

framework

relationship between the elements of the **content model** and the separate **encoding** and **portrayal** mechanisms

[ISO/TS 19129]

geographic location

longitude, latitude, and **elevation** of a ground or elevated **point**

[ISO/TS 19130-2]

NOTE: For the purpose of this document elevated **point** will be a **depth** based on a specified **datum**.

[CARL 2015]

geometric complex

set of disjoint **geometric primitives** where the boundary of each **geometric primitive** can be represented as the union of other **geometric primitives** of smaller dimension within the same set

NOTE: The **geometric primitives** in the set are disjoint in the sense that no **direct position** is interior to more than one **geometric primitive**. The set is closed under boundary operations, meaning that, for each element in the **geometric complex**, there is a collection (also a **geometric complex**) of **geometric primitives** that represents the boundary of that element. Recall that the boundary of a **point** (the only 0-D primitive **object** type in geometry) is empty. Thus, if the largest dimension **geometric primitive** is a solid (3-D), the composition of the boundary operator in this definition terminates after at most three steps. It is also the case that the boundary of any **object** is a cycle

[ISO 19107]

geometric object

spatial **object** representing a geometric set

NOTE: A **geometric object** consists of a **geometric primitive**, a collection of **geometric primitives**, or a **geometric complex** treated as a single entity. A **geometric object** may be the spatial representation of an **object** such as a **feature** or a significant part of a **feature**

[ISO 19107]

geometric primitive

geometric object representing a single, connected, homogeneous element of space

NOTE: **Geometric primitives** are non-decomposed **objects** that present **information** about geometric configuration. They include **points**, **curves**, surfaces, and solids

[ISO 19107]

georectified

corrected for positional displacement with respect to the surface of the Earth

[ISO 19115-2]

gridded data

data whose **attribute** values are associated with **positions** on a **grid coordinate** system

[ISO 19115-2]

image

gridded **coverage** whose **attribute** values are a numerical representation of a physical parameter

NOTE: The physical parameters are the result of measurement by a sensor or a prediction from a **model**

[ISO 19115-2]

implementation

realization of a specification

NOTE: In the context of the ISO geographic **information** standards, this includes specifications of geographic **information** services and **datasets**

[ISO 19105]

information

knowledge concerning objects, such as facts, events, things, processes, or ideas, including concepts, that within a certain context has a particular meaning

[ISO 19118]

instance

individual entity having its own identity and value

NOTE: A classifier specifies the form and behavior of a set of **instances** with similar properties

[ISO/TS 19103]

object that realizes a class

[ISO 19107]

layer

basic unit of geographic **information** that may be requested as a map from a server

[ISO 19128]

lineage

chain of legal ownership of content; history of ownership

[ISO 19153]

metadata

data about data

[ISO 19115]

metamodel <UML>

model that defines the language for expressing other models

NOTE: A **metamodel** is an instance of a meta-metamodel

[ISO/TS 19103]

model

abstraction of some aspects of reality

[ISO 19109]

navigation

combination of routing, route transversal, and tracking

NOTE: This is essentially the common term **navigation**, but the definition decomposes the process in terms used in the packages defined in this international standard

[ISO 19133]

object

entity with a well-defined boundary and identity that encapsulates state and behavior

NOTE 1: An **object** is an **instance** of a **class**

NOTE 2: This term was first used in this way in the general theory of object-oriented programming, and later adopted for use in this same sense in UML. **Attributes** and relationships represent state. Operations, methods, and state machines represent behavior

NOTE 3: A GML **object** is an XML **element** of a **type** derived from AbstractGMLType

[ISO 19107]

object <UML>

a discrete entity with a well-defined boundary and identity that encapsulates state and behavior; an **instance** of a **class**

[ISO/TS 19103]

point

zero-dimensional **geometric primitive**, representing a **position**

position

NOTE: The boundary of a **point** is the empty set

[ISO 19107]

point coverage


coverage that has a **domain** composed of **points**

[ISO 19123]

point set

set of 2, 3 or n dimensional points in space.

[S-100]



point set coverage

<p>coverage function associated with point value pairs in 2 dimensions. [S-100] NOTE: a coverage function is driven by a set of points (with X, Y position) together with a record of one or more values at that position.</p> <p>portrayal presentation of information to humans [ISO 19109, ISO 19117]</p> <p>portrayal catalogue collection of defined portrayals for a feature catalogue NOTE: Content of a portrayal catalogue includes portrayal functions, symbols, and portrayal context. [ISO 19117]</p> <p>portrayal context circumstances, imposed by factors extrinsic to a geographic dataset, that affect the portrayal of that dataset. EXAMPLE: Factors contributing to portrayal context may include the proposed display or map scale, the viewing conditions (day/night/dusk), and the display orientation requirements (north not necessarily at the top of the screen or page), among others NOTE: Portrayal context may influence the selection of portrayal functions and construction of symbols [ISO 19117]</p> <p>portrayal function function that maps geographic features to symbols NOTE: Portrayal functions can also include parameters and other computations that are not dependent on geographic feature properties [ISO 19117]</p> <p>portrayal function set function that maps a feature catalog to a symbol set [ISO 19117]</p> <p>portrayal rule specific kind of portrayal function expressed in a declarative language NOTE: A declarative language is rule based and includes decision and branching statements [ISO 19117]</p> <p>portrayal service generic interface used to portray features [ISO 19117]</p> <p>portrayal specification collection of operations applied to the feature instance to portray it [ISO 19117]</p> <p>position data type that describes a point or geometry potentially occupied by an object or person NOTE: A direct position is a semantic subtype of position. Direct positions as described can only define a point, and therefore not all positions can be represented by a direct position. That is consistent with the <i>is type of</i> relation. An ISO 19107 geometry is also a position, but not a direct position [ISO 19132]</p> <p>positional accuracy closeness of coordinate value to the true or accepted value in a specified reference system NOTE: The term <i>absolute accuracy</i> is sometimes used for this concept to distinguish it from relative positional accuracy. Where the true coordinate value may not be perfectly known, accuracy is normally tested by comparison with available values that can best be accepted as true [ISO 19116]</p> <p>product result of a process</p>	<p>[ISO 19158]</p> <p>product specification description of the universe of discourse and a specification for mapping the universe of discourse to a dataset [ISO 19158]</p> <p>profile set of one or more base standards or subsets of base standards, and, where applicable, the identification of chosen clauses, classes, options, and parameters of those base standards, that are necessary for accomplishing a particular function NOTE: A profile is derived from base standards so that, by definition, conformance to a profile is conformance to the base standards from which it is derived [ISO 19101, ISO 19106]</p> <p>profile <UML> definition of a limited extension to a reference metamodel with the purpose of adapting the metamodel to a specific platform or domain [ISO/TS 19103]</p> <p>quadrilateral grid coverage may be a rectified grid or a referenceable grid. [Springer 2012]</p> <p>quality totality of characteristics of a product that bear on its ability to satisfy stated and implied needs [ISO 19101, ISO 19109] Degree to which a set of inherent characteristics fulfills requirements NOTE 1: The term quality can be used with adjectives such as poor, good or excellent NOTE 2: <i>Inherent</i>, as opposed to <i>assigned</i>, means existing in something, especially as a permanent characteristic [ISO 19157] NOTE 3: For the purposes of this technical specification the quality characteristics of product include: – Data quality (the elements of which are described by ISO 19113) – Volume of delivery – Schedule of delivery – Cost of production and/or update [ISO 19158]</p> <p>range set of all values a function <i>f</i> can take as its arguments vary over its domain [ISO 19136]</p> <p>referenceable grid requires a formula of higher order that transforms into a coordinate reference system. EXAMPLE: the perspective transformation with eight parameters. [Springer 2012]</p> <p>render conversion of digital graphics data into visual form EXAMPLE Generation of an image on a video display [ISO 19117]</p> <p>schema formal description of a model NOTE: In general, a schema is an abstract representation of an object's characteristics and relationship to other objects. An XML schema represents the relationship between the attributes and elements of an XML object (for example, a document or a portion of a document) [ISO 19101]</p> <p>sequence finite, ordered collection of related items (objects or values) that may be repeated</p>
---	---

NOTE: Logically, a **sequence** is a set of pairs <item, offset>. LISP syntax, which delimits **sequences** with parentheses and separates elements in the **sequence** with commas, is used in this international standard [ISO 19107]

set

unordered collection of related items (**objects** or values) with no repetition [ISO 19107]

specification

declarative description of what something is or does

NOTE: Contrast: **implementation**

[retired version of ISO/TS 19103]

timestamp

value of time at which an **object's** state is measured and recorded

[ISO 19132]

symbol

portrayal primitive that can be graphic, audible, or tactile in nature, or a combination of these

[ISO 19117]

tuple

ordered list of values

NOTE 1: The number of values in a tuple is immutable

NOTE 2: the ordered list will generally be a finite

sequence of features, each of a specific **feature type**

[ISO 19136, ISO 19142]

type

a specification of the general structure and behavior of a **domain of objects** without providing a physical **implementation**

NOTE: A **type** may have **attributes** and associations

[ISO/TS 19103]

UML

The Unified Modeling Language (**UML**) is a general-purpose modeling language in the field of software engineering, which is designed to provide a standard way to visualize the design of a system.

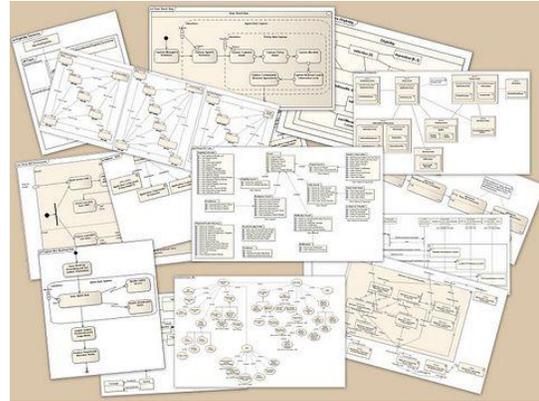


image courtesy of [Kishorekumar 62](#)

[Wikipedia 2015]

UML application schema

application schema written in UML in accordance with ISO 19109

[ISO 19136]**valid time**

time when a fact is true in the abstracted reality

[ISO 19108]

vector

quantity having direction as well as magnitude

NOTE: A directed line segment represents a **vector** if the length and direction of the line segment are equal to the magnitude and direction of the **vector**. The term *vector data* refers to **data** that represents the spatial configuration of **features** as a set of directed line segments

[ISO 19123]

vertical coordinate system

one-dimensional **coordinate** system used for gravity-related height or **depth** measurements

[ISO 19111]

vertical datum

datum describing the relation of gravity-related heights or **depths** to the Earth

NOTE: In most cases the **vertical datum** will be related to mean sea level. Ellipsoidal heights are treated as related to a three-dimensional ellipsoidal **coordinate** system referenced to a geodetic **datum**. **Vertical datums** include sounding **datums** (used for hydrographic purposes), in which case the heights may be negative heights or **depths**

[ISO 19111]

ANNEX C. APPLICATION SCHEMA

Feature Class

The Surface Current feature class (Figure C.1) has two mandatory attributes: *surfaceCurrentSpeed* and *surfaceCurrentDirection*. These variables capture the speed of current over ground and the general direction of the current at the location of the data. Each instance of surface current is only valid for a specific moment in time and may be part of a time series, as described in the metadata.

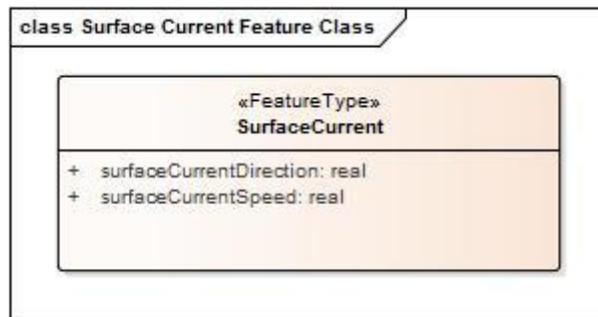


Figure C.1 – Surface Current Feature Class.

Surface Current Models

Surface Currents are described for the area of interest as a coverage, using either (1) a regularly spaced grid or a (2) point coverage. The Surface Current Model (SCM) is described in Figure C.2.

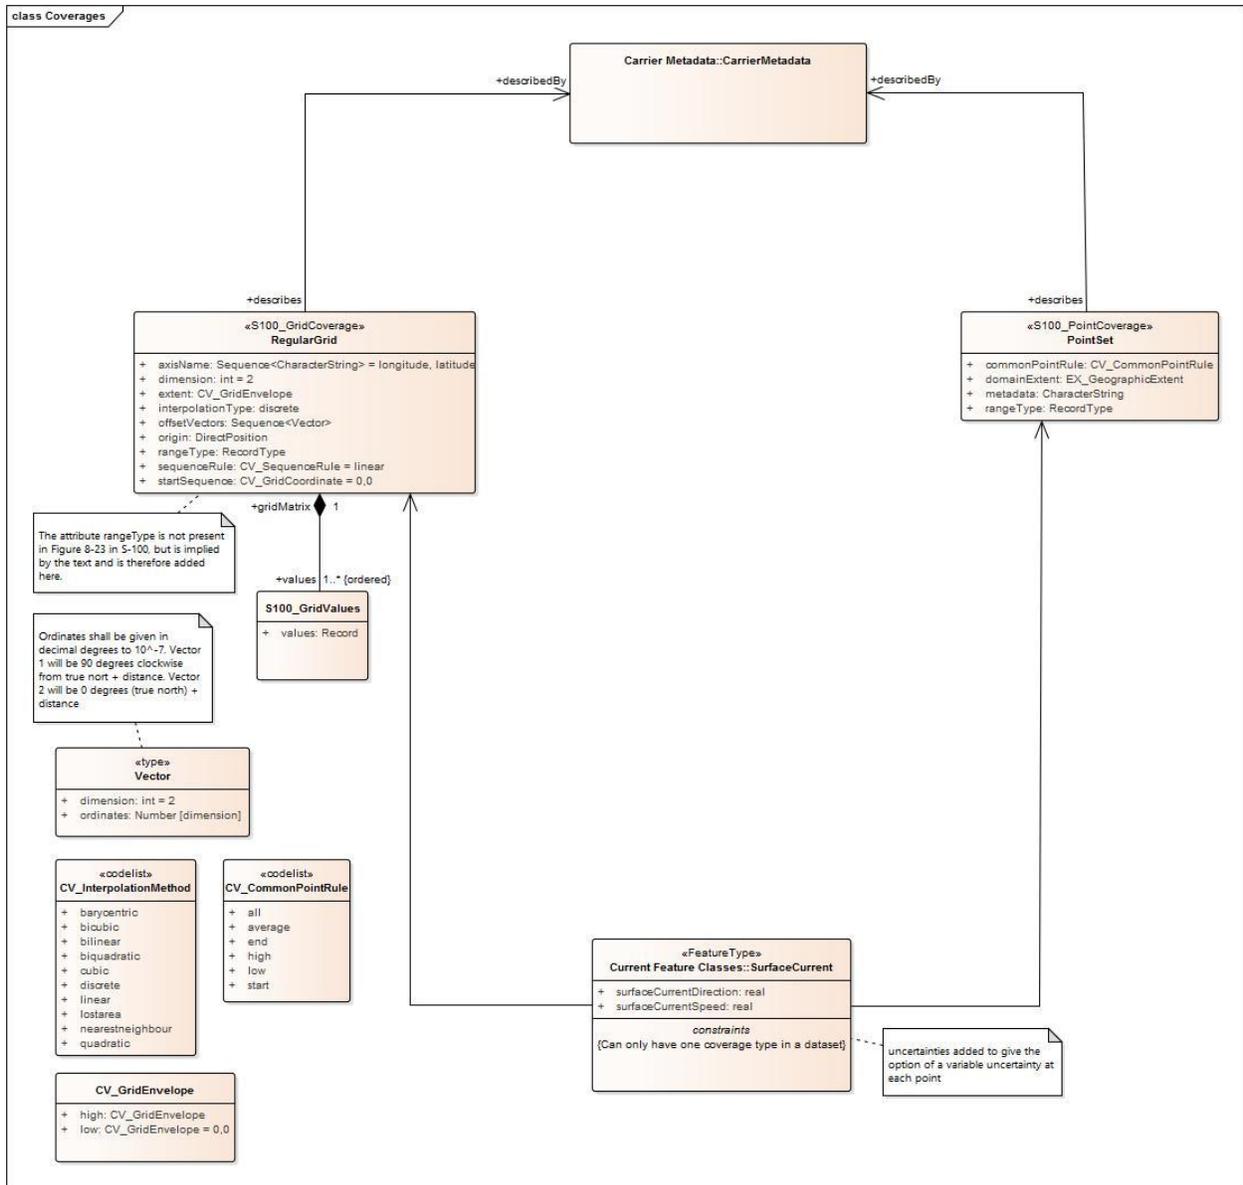


Figure C.2 - Surface Current Model.

Metadata

The metadata for the SCM is shown in Figure C.3.

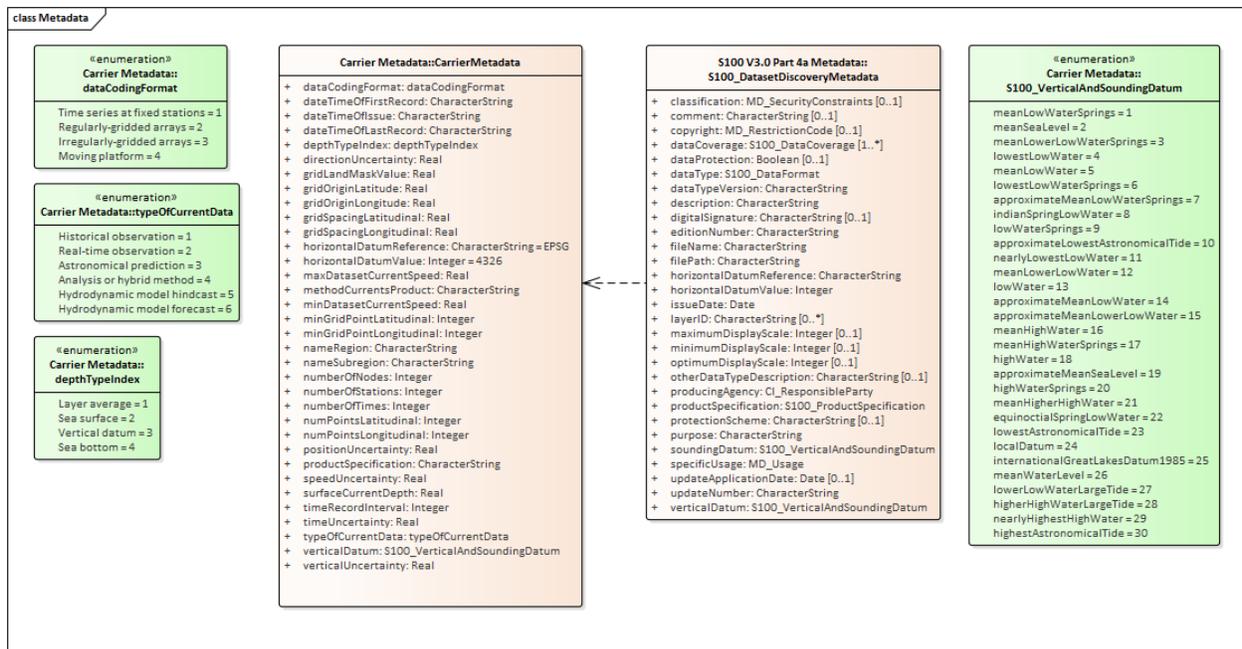


Figure C.3 – Metadata model for Surface Currents. Note that ‘horizontalUncertainty’ has been replaced by the preferred term ‘horizontalPositionUncertainty’

ANNEX D. FEATURE CATALOGUE

```
<?xml version="1.0" encoding="utf-8"?>
<S100FC:S100_FC_FeatureCatalogue xmlns:S100FC="http://www.iho.int/S100FC"
xmlns:S100Base="http://www.iho.int/S100Base" xmlns:S100CI="http://www.iho.int/S100CI"
xmlns:xlink="http://www.w3.org/1999/xlink" xmlns:S100FD="http://www.iho.int/S100FD"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:schemaLocation="http://www.iho.int/S100FC
S100FC.xsd">
  <S100FC:name>S111</S100FC:name>
  <S100FC:scope>Navigationally Significant Surface Current which may be used alone or as an auxiliary layer of
data with an ENC.</S100FC:scope>
  <S100FC:fieldOfApplication>Ocean Navigation</S100FC:fieldOfApplication>
  <S100FC:versionNumber>0.1</S100FC:versionNumber>
  <S100FC:versionDate>2016-12-15</S100FC:versionDate>
  <S100FC:producer>
    <S100CI:organisationName>IHO</S100CI:organisationName>
    <S100CI:contactInfo>
      <S100CI:phone>
        <S100CI:voice>+337 93 10 81 00</S100CI:voice>
        <S100CI:facsimile>+337 93 10 81 40</S100CI:facsimile>
      </S100CI:phone>
      <S100CI:address>
        <S100CI:deliveryPoint>via TWCWG</S100CI:deliveryPoint>
        <S100CI:deliveryPoint>via TWCWG</S100CI:deliveryPoint>
        <S100CI:deliveryPoint>via TWCWG</S100CI:deliveryPoint>
        <S100CI:deliveryPoint>via TWCWG</S100CI:deliveryPoint>
        <S100CI:deliveryPoint>via TWCWG</S100CI:deliveryPoint>
        <S100CI:postalCode>B.P.445</S100CI:postalCode>
        <S100CI:country>MONACO</S100CI:country>
      </S100CI:address>
      <S100CI:onlineResource>
        <S100CI:url>www.iho.int</S100CI:url>
      </S100CI:onlineResource>
    </S100CI:contactInfo>
    <S100CI:role>pointOfContact</S100CI:role>
  </S100FC:producer>
  <S100FC:classification>unclassified</S100FC:classification>
  <S100FC:S100_FC_SimpleAttributes>
    <S100FC:S100_FC_SimpleAttribute>
      <S100FC:name>Surface current direction</S100FC:name>
      <S100FC:definition>DIRECTION OF CURRENT. The direction toward which a CURRENT is flowing,
called the SET of the CURRENT. Also called current direction</S100FC:definition>
      <S100FC:code>surfaceCurrentDirection</S100FC:code>
      <S100FC:valueType>Real</S100FC:valueType>
    </S100FC:S100_FC_SimpleAttribute>
    <S100FC:S100_FC_SimpleAttribute>
      <S100FC:name>Surface current speed</S100FC:name>
      <S100FC:definition>Rate of motion. The terms speed and VELOCITY are often used interchangeably,
but speed is a scalar, having magnitude only, while VELOCITY is a vector quantity, having both magnitude and
```

direction. Speed may either be the ship's speed through water, or the SPEED MADE GOOD over ground.</S100FC:definition>

```
<S100FC:code>surfaceCurrentSpeed</S100FC:code>
<S100FC:valueType>Real</S100FC:valueType>
</S100FC:S100_FC_SimpleAttribute>
</S100FC:S100_FC_SimpleAttributes>
<S100FC:S100_FC_FeatureTypes>
  <S100FC:S100_FC_FeatureType isAbstract="false">
    <S100FC:name>Surface Current</S100FC:name>
    <S100FC:definition>Water or other fluid in essentially horizontal motion.</S100FC:definition>
    <S100FC:code>SurfaceCurrent</S100FC:code>
    <S100FC:attributeBinding sequential="false">
      <S100FC:multiplicity>
        <S100Base:lower>1</S100Base:lower>
        <S100Base:upper xsi:nil="false" infinite="false">1</S100Base:upper>
      </S100FC:multiplicity>
      <S100FC:attribute ref="surfaceCurrentSpeed"/>
    </S100FC:attributeBinding>
    <S100FC:attributeBinding sequential="false">
      <S100FC:multiplicity>
        <S100Base:lower>1</S100Base:lower>
        <S100Base:upper xsi:nil="false" infinite="false">1</S100Base:upper>
      </S100FC:multiplicity>
      <S100FC:attribute ref="surfaceCurrentDirection"/>
    </S100FC:attributeBinding>
    <S100FC:featureUseType>Geographic</S100FC:featureUseType>
    <S100FC:permittedPrimitives>coverage</S100FC:permittedPrimitives>
    <S100FC:permittedPrimitives>pointSet</S100FC:permittedPrimitives>
  </S100FC:S100_FC_FeatureType>
</S100FC:S100_FC_FeatureTypes>
</S100FC:S100_FC_FeatureCatalogue>
```

ANNEX E. TESTS OF COMPLETENESS (NORMATIVE)

E.1 Coverage Consistency

E.1.1 Test case for coverage geometry

Test purpose:	Verify that the coverage geometry corresponds to the conformance class
Conformance class	Gridded coverage, point coverage
Test method:	Check that the coverage geometry type complies with one of the two coverage types defined in the Application Schema defined in Annex C.
Test type:	Basic

E.1.2 Test case for extra data

Test purpose:	Verify that a Gridded coverage data set is complete by testing that the grid coverage value matrix contains direction and speed values, or null values, for every vertex point defined in the grid, and when all of the mandatory associated metadata is provided. Verify that a Point Coverage is complete by testing that the points containing direction and speed values are matched with a longitude-latitude pair, and when all of the mandatory associated metadata is provided.
Test method:	Check that for each feature, all of the mandatory metadata is provided, and that all of the vertex points have corresponding values.
Test type:	Basic

E.1.3 Test case for empty data

Test purpose:	Verify that data is not missing
Test method:	Check that all mandatory metadata is provided, and test that all data values for the grid or point coverage established in the metadata are provided
Test type:	Basic

E.2 Logical Consistency

Check that grid extent defined in the metadata is consistent with grid spacing and number of points. Check that the number of null values in the speed grid equals the number in the direction grid. Check that the point coverage envelope is consistent with the minimum and maximum point locations.

E.2.1 Conceptual Consistency

The implementation of the Surface Current Product is required to align with one of the two conformance classes defined in the appendix with the Abstract Test Suite and Conformance Classes.

E.2.2 Domain Consistency

The attributive values are validated to ensure they are within defined range.

Test purpose:	Verify that attribute values are within specified ranges
Test method:	Check that the surface current direction value attribute is within the range 0 to 360 degrees or are a null value and that the speed values are within the range specified or are a null value for the particular product specification defined by a producer. This would be validated by means of test software
Test type:	Basic

E.2.3 Positional Accuracy

For a gridded coverage the positional accuracy for the grid reference point and the length of the offset vectors defining the size of each grid cell, when specified, are defined in the metadata. For a Point Coverage the positional accuracy for the point is defined in the metadata.

Test purpose:	Verify that the grid reference point and offset vector in a grid coverage, and the points in a point coverage, are defined and in accordance with the accuracy established for the data set by the producer.
Test method:	Verify that the positional accuracy of the defining points of the coverage is within the accuracy established for the data set by the producer, in particular the Hydrographic Office, by the use of test software.
Test type:	Basic

E.2.4 Temporal Accuracy

For a gridded coverage the temporal reference time for the data at all grid points is the same. Temporal accuracy is not defined.

ANNEX F. SURFACE CURRENT DATA

This Annex describes the sources of data, methods of organizing surface current data (the time series and the grid), how the data product format is derived. In the last section we discuss additional features of current data.

F.1 Data Sources

For the purposes of this Product Specification, surface current data categorized as one of three types, depending on the source of production. These are:

- Historical and real-time observation,
- Astronomical prediction, and
- Model-based forecast or prediction.

An historical observation consists of a time series of values at a specific location or area, often at a specific elevation above the bottom or below the surface. Observations can be for a fixed point (current meter), a moving point (e.g., a Lagrangian drifter), along a vertical or horizontal line (Doppler profiler), or an area (coastal radar). A real-time (or near-real-time) observation is actually a historical observation but for the very recent past. The astronomical tidal current prediction is often a time series computed by a mathematical formula using harmonic constants. This prediction applies to a specific location and depth, and is often produced many months ahead of time.

The astronomical predictions for multiple stations are often combined into a digital tidal atlas, and the individual predicted currents are usually keyed to the time and amplitude of tidal water levels at a nearby station.

Finally, model-based forecasts or predictions are usually produced by a two- or three-dimensional numerical hydrodynamic model, and include astronomical tide, meteorological forcing, river inflow, spatially varying water density, and open ocean boundary inputs. A model-based hindcast, including an analysis, is based on historically-observed conditions. A forecast is usually produced to predict conditions a few hours or days ahead into the future.

F.2 Data Organization

Data are usually organized by the HO producer into either (a) a time series of values, such as for historical and real-time observations at a single point, or (b) a gridded set of values, such as from a model-based forecast or sea-surface analysis.

F.2.1 Time Series Data

An historical observation consists of a time series of values at a specific location or area, often at a specific elevation above the bottom or below the surface. Observations can be for a single point (current meter), along a line (Doppler profiler), or an area (coastal radar).

The data for individual current meter stations are most conveniently organized in a time series. For example, for historical observations and astronomical predictions, each record in the series consists of a time for which the data are valid and the water current data itself: speed and direction. Descriptive data may be contained in a metadata block at the beginning of the file.

Real-time data is similar to historical data in that, in addition to dataset metadata, they include either a single near-real-time value or a time series of values for speed and direction, with the most recent being the near-real-time value. A sample file containing observations is shown in Figure F.1.

```
# Station ID:      cb1101
## Orientation:   Down (Buoy-Mounted)
## Time Zone:    UTC
## Approx. Depth: Near Surface
## Blank rows indicate missing data. See our data
## disclaimer online.
##
## Date      Time      Speed (knots) Dir (true)
# 2014-12-01 00:00:00  1.08      215
# 2014-12-01 00:06:00  1.00      225
# 2014-12-01 00:12:00  0.83      226
# 2014-12-01 00:18:00  0.73      230
# 2014-12-01 00:24:00  0.80      223
# 2014-12-01 00:30:00  0.77      236
# 2014-12-01 00:36:00  0.73      229
# 2014-12-01 00:42:00  0.61      224
# 2014-12-01 00:48:00  0.71      224
# 2014-12-01 00:54:00  0.71      220
# 2014-12-01 01:00:00  0.67      230
```

Figure F.1 – Portion of an actual text file containing surface current observations at 6-minute intervals. The native format is ASCII text (other options were available). Data courtesy of the Center for Operational Oceanographic Products and Services, US.

The sample file contains (a) a metadata block, with information on the station, location, instrument type, and depth, and (b) a header line followed by multiple lines of values which include the date and time, the current speed, and the current direction.

The file shown in Figure F.1 can be reformatted so that the metadata appears at the beginning of the file, and the speed at direction data is group for each time (Figure F.2a).

```
[Metadata block for station # 1]

Value of Time 1: 2014-12-01 00:00:00
Speed at Time 1 = 1.08
Direction at Time 1 = 215

Value of Time 2: 2014-12-01 00:06:00
Speed at Time 2 = 1.00
Direction at Time 2 = 225

Value of Time 3: 2014-12-01 00:12:00
Speed at Time 3 = 0.83
Direction at Time 3 = 226
```

Figure F.2a - Reformatted time series or real-time data.

The data in Figure F.2a can be rearranged so that all the speeds and all the directions appear in a sequence, as in Figure F.2b.

```
[Metadata block for station # 1]
Value of Time 1: 2014-12-01 00:00:00
Speed = 1.08, 1.00, 0.83
Direction = 215, 225, 226
```

Figure F.2b - Reformatted time series data

F.2.2 Gridded Data

For certain data products that cover a specific geographic area, the data are most likely to be gridded. Examples are hindcasts and forecasts produced by a hydrodynamic model, currents derived from the analysis of sea-surface topography, and currents derived from high-frequency coastal radar observations.

Many spatial grids are regular (i.e., having uniform spacing in each direction) and geodetic (with the X axis directed toward the east and Y axis directed toward the north). Such grids are defined by several parameters: the origin (longitude and latitude of a geographic point), the grid spacing along each axis (degrees), and the number of points along each axis. Given an uncertainty in the location of the origin and in the spacing, there will be an uncertainty on the precise position of the grid points. A portion of the metadata and the current speed data from a forecast model is shown in Figure F.3. There are similar data for the current direction grid.

NOTE: some datasets contain a land mask array, for the purpose of determining whether a grid point represents land or water. Herein the product specification uses a land mask value (e.g., -99.999), which is substituted for a gridded value which is on land, to represent land, thus reducing the number of arrays required.

```

Dataset 'speed(knots)'
  Size: 500x325
  MaxSize: 500x325
  Datatype: H5T_IEEE_F32LE (single)
  ChunkSize: 1x325
  Filters: deflate(9)
  FillValue: 0.000000
  Attributes:
    'organization': 'Center Canadian Meteorological Service - Montreal (RSMC) (54) '
    'Delta_Longitude': '0.02993999933078885 '
    'Delta_Latitude': '0.019938461092802194 '
    'forecastDateTime': '20140611_180000 '
    'Product': 'Type: Forecast products Status: Operational products '
    'Minimum_Latitude': '45.5 '
    'Maximum_Latitude': '51.97999985516071 '
    'Maximum_Longitude': '-56.030000334605575 '
    'Number_Of_Cells_South_North': '325 '
    'Minimum_Longitude': '-71.0 '
    'Number_Of_Cells_West_East': '500 '
    'generatedDateTime': '20140611_000000 '
    'units': 'mm/s '
speed(knots) =
  0, 0, 0, 0.5191959, 0.5159838, 0.5159435, 0.5186388,
  0.5209069, 0.5167338, 0.5114825, 0.4738558, 0.378551, 0.2911682,
  0.204335, 0.1294665, ...

```

Figure F.3 - A portion of the actual metadata and the gridded current speed data produced by the Canadian Meteorological Service from a model-based forecast. The native format is HDF5.

Note that the data for current speed in Figure F.3 is organized similarly to that for time series: (a) metadata followed by (b) a header record and then the data. However, unlike the time series, the data are valid for a single time (the value of which appears elsewhere in the metadata).

Current data produced on ungeorectified grids or on unstructured grids, or for surface drifters, may be incorporated by spatially referencing each individual velocity location by explicitly giving its latitude and longitude in the metadata.

For gridded data in general, the metadata for both speed and direction will be the same, so only one metadata block is required to describe both the speed and direction data (Figure F.4). The data for speed in Figure F.3 is a series of values at grid points, starting from the lower left corner of the grid and proceeding along the first row until the end, then starting with the first point in the second row, and so on. Note that for the two fields (speed and direction) in this example, the memory required is 0.325 mb.

[Metadata block for gridded fields]

Value of Time 1

Speed at T1 = 0, 0, 0, 0.5191959, 0.5159838, 0.5159435, 0.5186388, 0.5209069, 0.5167338, 0.5114825,
0.4738558, 0.378551, 0.2911682, 0.204335, 0.1294665, ...

Direction at T1 = 0, 0, 0, 32.7725, 30.33029, 27.84417, 26.28601, 26.46908, 26.46744, 26.56505, 25.9423,
24.28312, 23.54004, 24.69553, 28.52312, ...

Figure F.4 - A portion of a generalized file with the metadata and the gridded current speed and direction data at one specific time from a model-based forecast shown in Figure F.3.

F.3 Digital Tidal Atlas Data

A digital tidal atlas typically contains speed and direction information for a number of locations, the valid time of which is expressed as a whole number of hours before and/or after either time of high water at a reference tidal water level station or time of maximum flood current at a reference station. Often the speed and direction are given for both neap and spring tide conditions (Table F.1).

Data in the atlas format, when used with daily predictions of tidal water levels or currents at a reference station, can be converted into time series data (see Figure F.2b), and thus into the S-111 format. This conversion is to the responsibility of the HO.

Table F.1 – Example of digital tidal data for a station off the French coast. Speed and direction vary by hour relative to high water at a reference station, and by tide range. Data courtesy of Service Hydrographique et Océanographique de la Marine, France.

Hour	Speed (ms ⁻¹)		Direction (deg)	
	Neap	Spring	Neap	Spring
-6	0.924	0.991	234.0	232.8
-5	0.991	1.047	235.4	233.5
-4	1.015	1.104	233.1	234.8
-3	0.939	1.132	233.4	233.0
-2	0.447	0.947	233.7	233.3
-1	0.302	0.061	232.8	200.1
0	0.444	0.292	232.5	56.0
1	0.562	0.044	232.5	68.2
2	0.596	0.469	232.4	231.2
3	0.620	0.662	232.5	231.3
4	0.705	0.779	232.7	231.6
5	0.797	0.886	233.0	232.1
6	0.876	0.967	233.5	232.6

F.4 Moving Platform Data

Moving platforms (e.g., surface Lagrangian drifters) float along with the currents and represent the motion at some depth depending on the specific design. The data are often available, in the raw form, as a list with locations and (usually non-equally-spaced) times (Figure F.5). The data are often telemetered from the drifter to a collection station.

```
OBJECTID,ARID,YR,MON,DD,HH,MM,SS,LAT,LON,ACC
127134,52299,2005,9,25,7,18,16,15.57400000000,142.82200000000,2
127135,52299,2005,9,25,8,58,0,15.57400000000,142.80000000000,2
127136,52299,2005,9,25,18,47,37,15.54300000000,142.72100000000,2
127137,52299,2005,9,25,19,47,45,15.54100000000,142.71100000000,2
127138,52299,2005,9,25,21,27,29,15.53300000000,142.69200000000,2
127139,52299,2005,9,26,6,55,6,15.49900000000,142.65500000000,1
127140,52299,2005,9,26,8,34,6,15.48600000000,142.64400000000,2
127141,52299,2005,9,26,18,35,27,15.43800000000,142.59300000000,1
127142,52299,2005,9,26,19,23,51,15.43300000000,142.59000000000,2
```

Figure F.5 - Portion of an Argos System CLS file describing the positions and times of a specific Lagrangian drifter.

In the raw form, the data must be converted into speed and directions. This can be accomplished by cubic spline interpolation of the longitudes and latitudes separately, then dividing the difference in position by the differences in time. The data can be converted into time series data (see Figure F.2b), and thus into the S-111 format.

F.5 Preliminary Data Product Format

Two forms of data (Figures F.2b and F.4) are similar, the main difference being that the multiple values for each variable in Figure F.4 correspond to multiple grid points, rather than the multiple times in Figure F.2b (at a single station). Thus the two forms can be combined into a single form (Figure F.6, although the data are interpreted differently. Other forms of data (Figures F.4 and F.5) must be processed to fit the format.

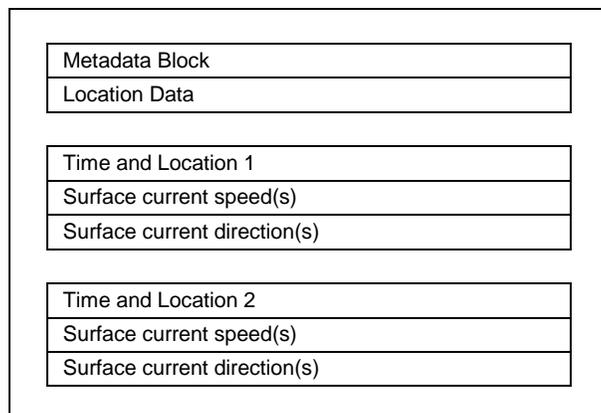


Figure F.6 – Schematic of the preliminary product data set. The product can represent either a time series

at a number of stations or gridded data.

F.6 Additional Features of the Data

The following sections described additional features of current data and types.

F.6.1 Vertical Reference Datums

The vertical location of the current in the water column is normally referenced to some vertical datum. In this Product Specification, the datum is selectable: it can be the sea surface, the sea bottom, or any of 30 standard tidal datums. The coordinate system axis is directed upward, so if the level of the current is below the datum, the depth will have a negative value. Levels referenced above the sea bottom will have a positive value. For a layer average, the thickness of the layer is specified as a positive value.

In principle, it is possible to transform elevations between the different datums. The separation between a standard tidal datum and the sea surface varies with time, and can be obtained by a prediction of the water level at the location of the current. In the case of a hydrodynamic model for currents, the model itself usually includes a water level prediction. The separation between the sea bottom and the standard tidal datum is often contained automatically in bathymetric data that is reference to a chart datum. If chart datum and the selected currents datum are different, an estimation of the difference in elevation is required.

F.6.2 Uncertainty

Uncertainty is the estimate of the error in any measurement or value; since the error (difference between true and observed value) depends on true value, which can never be measured. For practical purposes, the confidence level is 95% and the uncertainty is defined herein as 1.96 times the standard deviation of the differences between observed and predicted values (cf. S-44. *IHO Standards for Hydrographic Surveys*, 5th Edition February 2008). For multiple sources of uncertainty, the total propagated uncertainty is the relevant value.

For example, the comparison between a predicted speed and the observed speed is normally based on an analysis using the time series for each. The standard deviation of the speed differences at each point in the series can be computed by the common formula. The calculation is similar for direction. It should be noted that for model-based predictions, uncertainty usually increases with the projection into the future.

Uncertainty for location is somewhat different. Horizontal locations of fixed or drifting observing stations are determined by surveying or GPS. The inherent uncertainties in these types of measurements are normally documented. For gridded hydrodynamic model data, uncertainties are based on the precision of the grid parameters (origin and spacing) and, if used, on any transformation from Cartesian (flat plane) position to geographic location. For coastal radar, uncertainty in position may be estimated by the local geometry and radar's accuracy in computing distances and angles.

Vertical locations of fixed or drifting observing stations are determined by surveying or GPS, and by configuration geometry. For gridded hydrodynamic model data, uncertainties are determined in a manner similar to the horizontal positions, but with consideration for uncertainties in instantaneous sea surface height, actual water depth, and vertical (if used).

Uncertainties in time are based on instrumentation and GPS parameters, record keeping, and computer/processing accuracy.

ANNEX G. SAMPLE HDF-5 ENCODING

The following are examples of HDF5 files data for each of the four data coding formats. The general structure of the data product is shown in Figure 10.2, and the specific variables contained in the attributes is explained in Tables 12.1, 12.2, and 12.3. The sample files were produced by Matlab® and were displayed in HDFView.

G.1 Stationary Platform (dataCodingFormat=1)

The screenshot shows the HDFView interface. On the left is a tree view of the file structure. On the right, three panels are open:

- Top panel:** A table showing attributes for 'SurfaceCurrent'.

	code	name	uom	fillValue	dataType	lower	upper	closure
0	surfaceCurrentSpeed	Surface current speed	knots	-1.0	H5T_FLOAT	0.0		geSemilInterval
1	surfaceCurrentDirection	Surface current direction	arc-degrees	-1.0	H5T_FLOAT	0.0	359.9	closedInterval
- Middle panel:** A text view showing the feature code for 'SurfaceCurrent' as '0'.

	featureCode
0	SurfaceCurrent
- Bottom panel:** A text view showing axis names for 'SurfaceCurrent'.

	axisNames
0	longitude
1	latitude

Figure G.1 – Screen-capture image showing (left side) the overall structure of the HDF5 file, and (right side) the Group_F SurfaceCurrent attributes (top panel) (see Table 10.3), the Group_F SurfaceCurrent feature code (middle panel) and the SurfaceCurrent axisNames (bottom panel).

The screenshot shows two panels from HDFView:

- Top panel:** A table showing compound array values for 'SurfaceCurrent' in Group_001.

	0	1	2	3
	surfaceCurrentDirection	surfaceCurrentSpeed	surfaceCurrentDirection	surfaceCurrentSpeed
0	50.9	1.61	53.4	1.58
	surfaceCu...	surfaceCur...	surfaceCu...	surfaceCur...
	59.0	1.5		
- Bottom panel:** A table showing longitude and latitude values for 'Positioning'.

	Longitude	Latitude
0	-76.29	39.2501234
1	-76.41	38.74
2	-76.33	38.25
3	-76.19	38.21

Figure G.2 – Compound array values for speed and direction in Group_001 (top panel) and the longitudes and latitudes in the group Positioning (bottom panel).

Number of attributes = 16 Add Delete

Name	Value	Type	Array Size
depthTypeIndex	2	64-bit integer	Scalar
eastBoundLongitude	-76.1899999	64-bit floating-point	Scalar
epoch	G1762	String, length = 5	Scalar
geographicIdentifier	US_East_Coast_Chesapeake_Bay	String, length = 28	Scalar
horizDatumReference	EPSG	String, length = 4	Scalar
horizDatumValue	4326	64-bit integer	Scalar
issueDate	20180508	String, length = 8	Scalar
issueTime	211340Z	String, length = 7	Scalar
metaFeatures	none	String, length = 4	Scalar
metadata	unknown.XML	String, length = 11	Scalar
northBoundLatitude	39.2501235	64-bit floating-point	Scalar
productSpecification	INT.IHO.S-111.1.0	String, length = 17	Scalar
southBoundLatitude	38.2100001	64-bit floating-point	Scalar
surfaceCurrentDepth	-4.5	64-bit floating-point	Scalar
verticalDatum	0	64-bit integer	Scalar
westBoundLongitude	-76.4099999	64-bit floating-point	Scalar

Properties - /SurfaceCurrent

Number of attributes = 13 Add Delete

Name	Value	Type	Array Size
commonPointRule	1	64-bit integer	Scalar
dataCodingFormat	1	64-bit integer	Scalar
dimension	2	64-bit integer	Scalar
directionUncertainty	-1.0	64-bit floating-point	Scalar
horizontalPositionUncertainty	-1.0	64-bit floating-point	Scalar
maxDatasetCurrentSpeed	2.41	64-bit floating-point	Scalar
methodCurrentsProduct	test_harmonic_constant_prediction	String, length = 33	Scalar
minDatasetCurrentSpeed	0.03	64-bit floating-point	Scalar
numInstances	1	64-bit integer	Scalar
speedUncertainty	-1.0	64-bit floating-point	Scalar
timeUncertainty	-1.0	64-bit floating-point	Scalar
typeOfCurrentData	3	64-bit integer	Scalar
verticalUncertainty	-1.0	64-bit floating-point	Scalar

Figure G.3 – Images showing attributes in the Root directory (top panel) and attributes for the group SurfaceCurrent (bottom panel).

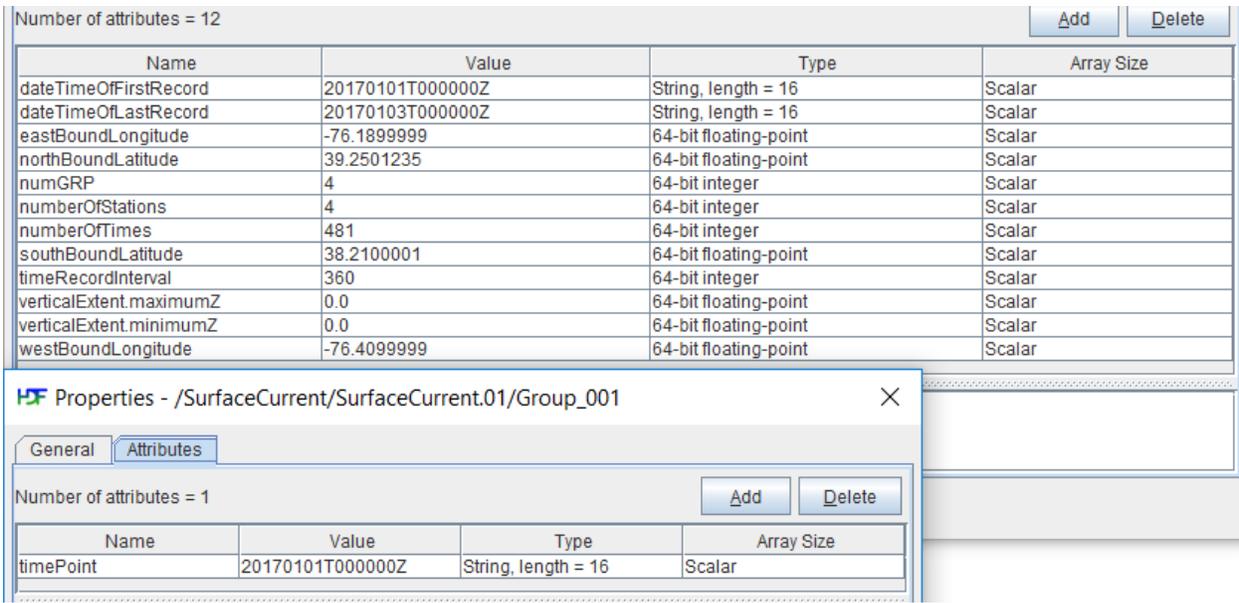


Figure G.4 – Image showing attributes in the instance group SurfaceCurrent.01 (top panel) and attributes in the group Group_001 (bottom panel).

G.2 Regular Grid (dataCodingFormat=2)

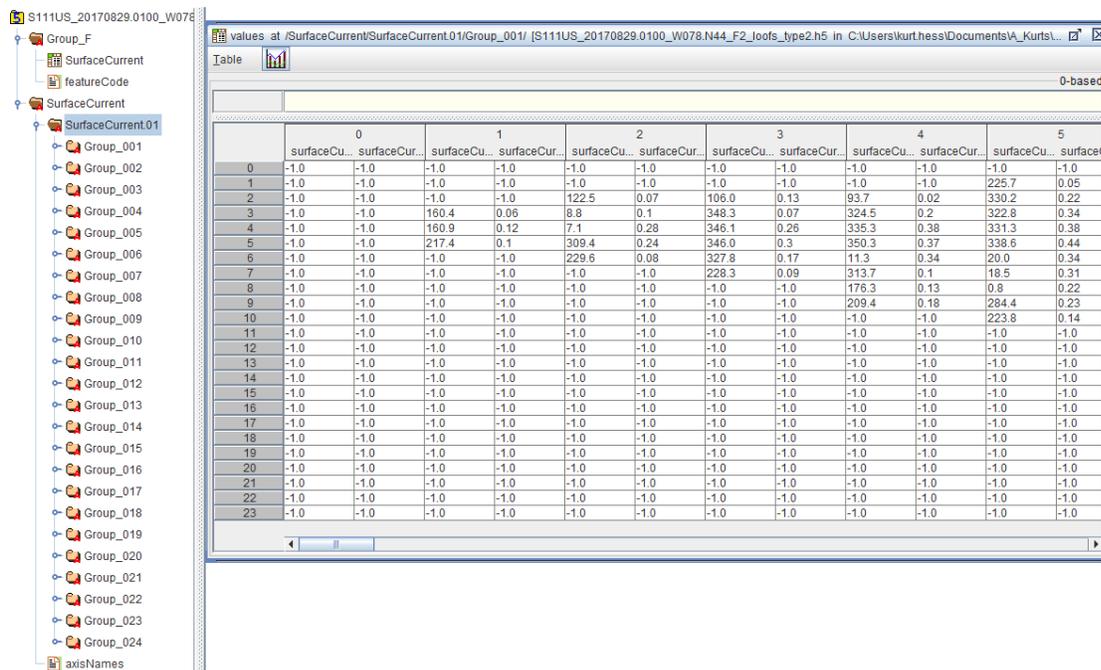


Figure G.5 – Image showing (left side) the structure of the file and (right side) the two-dimensional compound array of values for regularly gridded data.

Number of attributes = 16				Add	Delete
Name	Value	Type	Array Size		
depthTypeIndex	2	64-bit integer	Scalar	▲	
eastBoundLongitude	-76.1373999	64-bit floating-point	Scalar		
epoch	G1762	String, length = 5	Scalar		
geographicIdentifier	Lake_Ontario	String, length = 12	Scalar		
horizDatumReference	EPSG	String, length = 4	Scalar		
horizDatumValue	4326	64-bit integer	Scalar		
issueDate	20180508	String, length = 8	Scalar		
issueTime	213107Z	String, length = 7	Scalar		
metaFeatures	none	String, length = 4	Scalar		
metadata	unknown.XML	String, length = 11	Scalar		
northBoundLatitude	44.1836201	64-bit floating-point	Scalar		
productSpecification	INT.IHO.S-111.1.0	String, length = 17	Scalar		
southBoundLatitude	43.1930001	64-bit floating-point	Scalar		
surfaceCurrentDepth	-4.5	64-bit floating-point	Scalar		
verticalDatum	0	64-bit integer	Scalar		
westBoundLongitude	-79.7335999	64-bit floating-point	Scalar	▼	

Number of attributes = 16				Add	Delete
Name	Value	Type	Array Size		
commonPointRule	1	64-bit integer	Scalar	▲	
dataCodingFormat	2	64-bit integer	Scalar		
dimension	2	64-bit integer	Scalar		
directionUncertainty	-1.0	64-bit floating-point	Scalar		
horizontalPositionUncertainty	-1.0	64-bit floating-point	Scalar		
interpolationType	10	64-bit integer	Scalar		
maxDatasetCurrentSpeed	0.68	64-bit floating-point	Scalar		
methodCurrentsProduct	POMGL_3d_fcst	String, length = 13	Scalar		
minDatasetCurrentSpeed	0.0	64-bit floating-point	Scalar		
numInstances	1	64-bit integer	Scalar		
sequencingRule.scanDirection	longitude,latitude	String, length = 17	Scalar		
sequencingRule.type	1	64-bit integer	Scalar		
speedUncertainty	-1.0	64-bit floating-point	Scalar		
timeUncertainty	-1.0	64-bit floating-point	Scalar		
typeOfCurrentData	6	64-bit integer	Scalar		
verticalUncertainty	-1.0	64-bit floating-point	Scalar	▼	

Figure G.6 - Images showing attributes in the Root directory (top panel) and attributes for the group SurfaceCurrent (bottom panel).

Number of attributes = 20

Name	Value	Type	Array Size
dateTimeOfFirstRecord	20170829T010000Z	String, length = 16	Scalar
dateTimeOfLastRecord	20170830T000000Z	String, length = 16	Scalar
eastBoundLongitude	-76.1373999	64-bit floating-point	Scalar
gridOriginLatitude	-76.1824282	64-bit floating-point	Scalar
gridOriginLongitude	-79.7956034	64-bit floating-point	Scalar
gridOriginVertical	0.0	64-bit floating-point	Scalar
gridSpacingLatitudinal	0.0450282	64-bit floating-point	Scalar
gridSpacingLongitudinal	0.0620034	64-bit floating-point	Scalar
gridSpacingVertical	0.0	64-bit floating-point	Scalar
northBoundLatitude	44.1836201	64-bit floating-point	Scalar
numGRP	24	64-bit integer	Scalar
numPointsLatitudinal	24	64-bit integer	Scalar
numPointsLongitudinal	60	64-bit integer	Scalar
numberOfTimes	24	64-bit integer	Scalar
southBoundLatitude	43.1930001	64-bit floating-point	Scalar
startSequence	0,0	String, length = 3	Scalar
timeRecordInterval	3600	64-bit integer	Scalar
verticalExtent.maximumZ	0.0	64-bit floating-point	Scalar
verticalExtent.minimumZ	0.0	64-bit floating-point	Scalar
westBoundLongitude	-79.7335999	64-bit floating-point	Scalar

Properties - /SurfaceCurrent/SurfaceCurrent.01/Group_001

Number of attributes = 1

Name	Value	Type	Array Size
timePoint	20170829T010000Z	String, length = 16	Scalar

Figure G.7 – Images showing attributes for the group SurfaceCurrent.01 (top panel) and in the instance group Group_001 (bottom panel).

G.3 Ungeorectified Grid (dataCodingFormat=3)

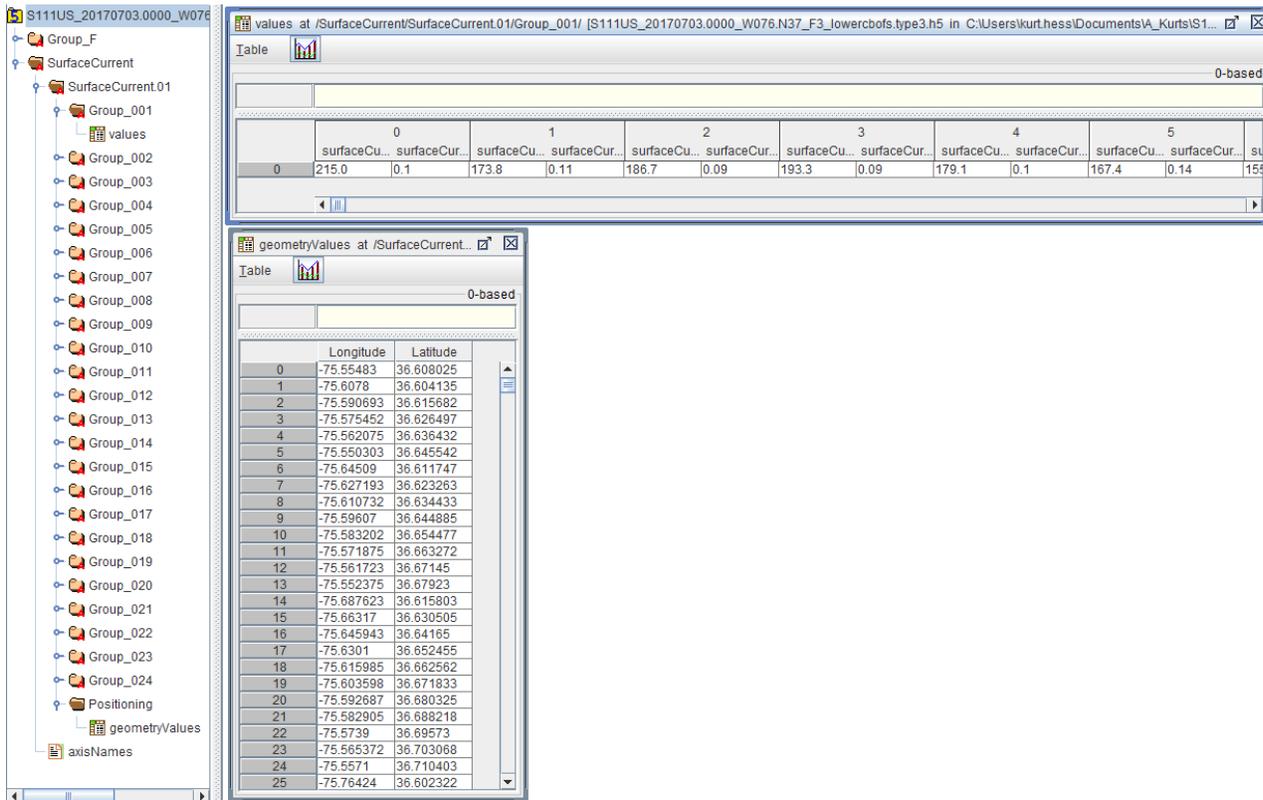


Figure G.8 – Image showing (left side) the structure of the file, and (right side) the one-dimensional compound array of values for ungeorectified gridded data (top panel) and the data in the group Positioning (bottom panel).

Number of attributes = 16

Name	Value	Type	Array Size
depthTypeIndex	2	64-bit integer	Scalar
eastBoundLongitude	-75.5501399	64-bit floating-point	Scalar
epoch	G1762	String, length = 5	Scalar
geographicIdentifier	Chesapeake_Bay_lower_bay_&_entrance	String, length = 36	Scalar
horizDatumReference	EPSG	String, length = 4	Scalar
horizDatumValue	4326	64-bit integer	Scalar
issueDate	20180508	String, length = 8	Scalar
issueTime	214014Z	String, length = 7	Scalar
metaFeatures	none	String, length = 4	Scalar
metadata	unknown.XML	String, length = 11	Scalar
northBoundLatitude	38.1997821	64-bit floating-point	Scalar
productSpecification	INT.IHO.S-111.1.0	String, length = 17	Scalar
southBoundLatitude	36.6023221	64-bit floating-point	Scalar
surfaceCurrentDepth	-4.5	64-bit floating-point	Scalar
verticalDatum	0	64-bit integer	Scalar
westBoundLongitude	-77.2895369	64-bit floating-point	Scalar

Properties - /SurfaceCurrent

General **Attributes**

Number of attributes = 14

Name	Value	Type	Array Size
commonPointRule	1	64-bit integer	Scalar
dataCodingFormat	3	64-bit integer	Scalar
dimension	2	64-bit integer	Scalar
directionUncertainty	-1.0	64-bit floating-point	Scalar
horizontalPositionUncertainty	-1.0	64-bit floating-point	Scalar
interpolationType	10	64-bit integer	Scalar
maxDatasetCurrentSpeed	2.39	64-bit floating-point	Scalar
methodCurrentsProduct	ROMS_3d_fcst	String, length = 12	Scalar
minDatasetCurrentSpeed	0.0	64-bit floating-point	Scalar
numInstances	1	64-bit integer	Scalar
speedUncertainty	-1.0	64-bit floating-point	Scalar
timeUncertainty	-1.0	64-bit floating-point	Scalar
typeOfCurrentData	6	64-bit integer	Scalar
verticalUncertainty	-1.0	64-bit floating-point	Scalar

Figure G.9 - Images showing attributes in the Root directory (top panel) and attributes for the group SurfaceCurrent (bottom panel).

Number of attributes = 12

Name	Value	Type	Array Size
dateTimeOfFirstRecord	20170703T000000Z	String, length = 16	Scalar
dateTimeOfLastRecord	20170703T230000Z	String, length = 16	Scalar
eastBoundLongitude	-75.5501399	64-bit floating-point	Scalar
northBoundLatitude	38.1997821	64-bit floating-point	Scalar
numGRP	24	64-bit integer	Scalar
numberOfNodes	7662	64-bit integer	Scalar
numberOfTimes	24	64-bit integer	Scalar
southBoundLatitude	36.6023221	64-bit floating-point	Scalar
timeRecordInterval	3600	64-bit integer	Scalar
verticalExtent.maximumZ	0.0	64-bit floating-point	Scalar
verticalExtent.minimumZ	0.0	64-bit floating-point	Scalar
westBoundLongitude	-77.2895369	64-bit floating-point	Scalar

Properties - /SurfaceCurrent/SurfaceCurrent.01/Group_001

General Attributes

Number of attributes = 1

Name	Value	Type	Array Size
timePoint	20170703T000000Z	String, length = 16	Scalar

Figure G.10 – Images showing attributes for the group SurfaceCurrent.01 (top panel) and in the instance group Group_001 (bottom panel).

G.4 Moving Platform (dataCodingFormat=4)

values at /SurfaceCurrent/SurfaceCurrent.01/Group_001 [S111US_20050925.1200_E133.N17_Y4_argos_type4.h5 in C:\Users\kurt.hess\Documents\A_Kurts\S111 v1.13]

	0	1	2	3	4	5	6							
surfaceCu... surfaceCur...	surfaceCu... su...													
0	244.7	0.51	234.5	0.44	218.6	0.39	230.6	0.61	240.6	0.62	235.7	0.56	231.6	0.7

geometryValues at /SurfaceCurrent/Su...

137, Longit_	131.8985751	
	Longitude	Latitude
0	142.7699988	15.5672698
1	142.6741556	15.523643
2	142.6229304	15.4661694
3	142.5729797	15.4015753
4	142.4258062	15.3102463
5	142.3488454	15.2786231
6	142.2356474	15.1849850
7	142.1180906	15.1031342
8	141.9944155	14.9673503
9	141.8579228	14.8995044
10	141.7817431	14.7795366
11	141.6764949	14.6955836
12	141.5749555	14.5809149
13	141.4816511	14.5051663
14	141.4015708	14.4306197
15	141.3903948	14.3616583
16	141.4414817	14.2453969

Figure G.11 – Image showing (left side) the structure of the file, and (right side) the one-dimensional compound array of values for ungeorectified gridded data (top panel) and the data in the group Positioning (bottom panel).

Number of attributes = 16			
Name	Value	Type	Array Size
depthTypeIndex	2	64-bit integer	Scalar
eastBoundLongitude	142.7699989	64-bit floating-point	Scalar
epoch	G1762	String, length = 5	Scalar
geographicIdentifier	Western_N_Pacific_Ocean,_Philippine_Sea	String, length = 39	Scalar
horizDatumReference	EPSG	String, length = 4	Scalar
horizDatumValue	4326	64-bit integer	Scalar
issueDate	20180508	String, length = 8	Scalar
issueTime	214911Z	String, length = 7	Scalar
metaFeatures	none	String, length = 4	Scalar
metadata	unknown.XML	String, length = 11	Scalar
northBoundLatitude	20.2290719	64-bit floating-point	Scalar
productSpecification	INT.IHO.S-111.1.0	String, length = 17	Scalar
southBoundLatitude	13.4450001	64-bit floating-point	Scalar
surfaceCurrentDepth	-4.5	64-bit floating-point	Scalar
verticalDatum	0	64-bit integer	Scalar
westBoundLongitude	123.9642636	64-bit floating-point	Scalar

Properties - /SurfaceCurrent



Number of attributes = 13			
Name	Value	Type	Array Size
commonPointRule	1	64-bit integer	Scalar
dataCodingFormat	4	64-bit integer	Scalar
dimension	2	64-bit integer	Scalar
directionUncertainty	-1.0	64-bit floating-point	Scalar
horizontalPositionUncertainty	-1.0	64-bit floating-point	Scalar
maxDatasetCurrentSpeed	1.88	64-bit floating-point	Scalar
methodCurrentsProduct	Argos_Lagrangian_Drifters_12_hrly_interp	String, length = 40	Scalar
minDatasetCurrentSpeed	0.03	64-bit floating-point	Scalar
numInstances	1	64-bit integer	Scalar
speedUncertainty	-1.0	64-bit floating-point	Scalar
timeUncertainty	-1.0	64-bit floating-point	Scalar
typeOfCurrentData	4	64-bit integer	Scalar
verticalUncertainty	-1.0	64-bit floating-point	Scalar

Figure G.12 - Images showing attributes in the Root directory (top panel) and attributes for the group SurfaceCurrent (bottom panel).

Number of attributes = 12 Add Delete

Name	Value	Type	Array Size
dateTimeOfFirstRecord	20050925T120000Z	String, length = 16	Scalar
dateTimeOfLastRecord	20060415T000000Z	String, length = 16	Scalar
eastBoundLongitude	142.7699989	64-bit floating-point	Scalar
northBoundLatitude	20.2290719	64-bit floating-point	Scalar
numGRP	1	64-bit integer	Scalar
numberOfStations	1	64-bit integer	Scalar
numberOfTimes	384	64-bit integer	Scalar
southBoundLatitude	13.4450001	64-bit floating-point	Scalar
timeRecordInterval	43200	64-bit integer	Scalar
verticalExtent.maximumZ	0.0	64-bit floating-point	Scalar
verticalExtent.minimumZ	0.0	64-bit floating-point	Scalar
westBoundLongitude	123.9642636	64-bit floating-point	Scalar

Properties - /SurfaceCurrent/SurfaceCurrent.01/Group_001 X

General **Attributes**

Number of attributes = 1 Add Delete

Name	Value	Type	Array Size
timePoint	20050925T120000Z	String, length = 16	Scalar

Figure G.13 – Images showing attributes for the group SurfaceCurrent.01 (top panel) and in the instance group Group_001 (bottom panel).

ANNEX H. COLOUR TABLES

Below are the colour tables for the day, dusk, and night conditions. The estimates for dusk and night were obtained by first converting the values for RGB colours for day conditions (Clause 9.2.3) to xyL values, where L is luminance. Existing xyL data for dusk and night conditions for approximately 50 colors from S-52 (S-52 Presentation Library Edition 4.0.0, Part 1, Appx. A) demonstrate that luminance is reduced while the x and y values (mostly) remain constant. For each S-111 colour, the closest S-52 colour for day conditions (based on the x and y values) was then found, and that colour's luminance reduction factors for other conditions were used to calculate the xyL values. Finally, the new xyL values were converted back to RGB.

Table H.1 – Colour parameters for DAY conditions for each speed band.

Band	Token	Colour	x	y	L	R	G	B	RGB Hex
1	SCBN1	purple	0.21	0.14	15	118	82	226	7652E2
2	SCBN2	dark blue	0.21	0.24	29	72	152	211	4898D3
3	SCBN3	light blue	0.23	0.29	51	97	203	229	61CBE5
4	SCBN4	dark green	0.33	0.52	40	109	188	69	6DBC45
5	SCBN5	light green	0.39	0.53	61	180	220	0	B4DC00
6	SCBN6	yellow-green	0.43	0.50	51	205	193	0	CDC100
7	SCBN7	orange	0.49	0.45	48	248	167	24	F8A718
8	SCBN8	pink	0.40	0.33	48	247	162	157	F7A29D
9	SCBN9	red	0.64	0.33	21	255	30	30	FF1E1E

Table H.2 – Colour parameters for DUSK conditions for each speed band.

Band	Token	Colour	x	y	L	R	G	B	RGB Hex
1	SCBN1	purple	0.21	0.14	7	81	55	159	51379E
2	SCBN2	dark blue	0.21	0.24	3	20	52	76	14344C
3	SCBN3	light blue	0.23	0.29	1	6	24	29	06181C
4	SCBN4	dark green	0.33	0.52	13	64	114	39	3F7126
5	SCBN5	light green	0.39	0.53	21	110	136	0	6E8700
6	SCBN6	yellow-green	0.43	0.50	18	126	119	0	7E7600
7	SCBN7	orange	0.49	0.45	15	147	97	1	936100
8	SCBN8	pink	0.40	0.33	5	86	53	51	553533
9	SCBN9	red	0.64	0.33	9	178	1	1	B10101

Table H.3 – Colour parameters for NIGHT conditions for each speed band.

Band	Token	Colour	x	y	L	R	G	B	RGB Hex
1	SCBN1	purple	0.21	0.14	1	26	15	59	190F3A
2	SCBN2	dark blue	0.21	0.24	1	4	17	28	03101B
3	SCBN3	light blue	0.23	0.29	0	1	6	8	010607
4	SCBN4	dark green	0.33	0.52	2	19	40	8	122708
5	SCBN5	light green	0.39	0.53	3	38	49	0	263000
6	SCBN6	yellow-green	0.43	0.50	2	45	42	0	2C2900
7	SCBN7	orange	0.49	0.45	2	54	33	0	352000
8	SCBN8	pink	0.40	0.33	1	33	17	17	201110
9	SCBN9	red	0.64	0.33	1	63	0	0	3F0000

ANNEX I. SCALABLE VECTOR GRAPHICS (SVG) CODING

The following shows a sample XML file for creating a layer with surface current arrows, along with a sample figure showing the arrows, and the Cascading Style Sheet (.CSS) file.

NOTE: symbol and colour names in the following examples are for illustration only; the final names and instructions in the Portrayal Catalogue may be different.

I.1 Sample SVG Image

A sample image showing the vector arrows generated by the SVG and CSS codes appears in Figure I.1. The image was created by opening the file in Microsoft Internet Explorer®.

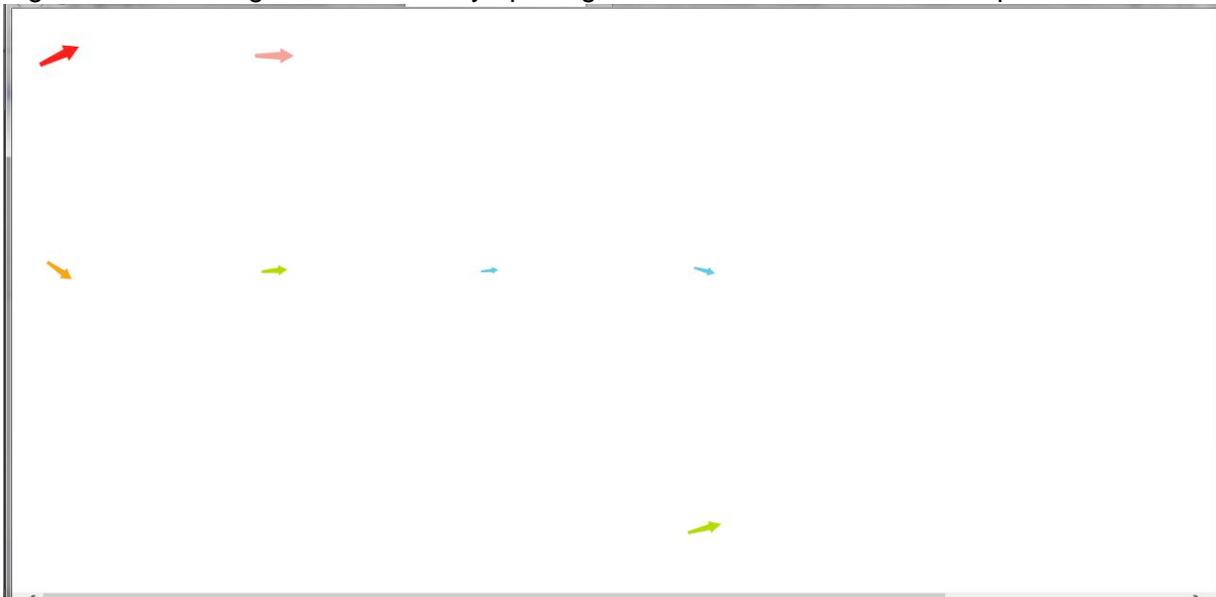


Figure I.1 – Image showing the arrows generated by the .svg and .css codes in this Annex.

I.2 Sample SVG File to Display Arrows

The sample .svg file shown describes a screen measuring 200 mm wide by 130 mm high. The basic arrows are 10 mm high, and are rotated clockwise by a certain number of degrees to show the current direction. They are also translated in the x- and y-directions by a number of mm to show position, and scaled in length to denote speed relative to the reference speed. The color is denoted by the *fstep* parameter (see the .css file).

```
<?xml version="1.0" encoding="UTF-8"?>
<?xml-stylesheet href="SVGStyle_S111.css" type="text/css"?>
  <!-- width and height of viewport, in mm. The viewBox is x-min y-min width height -->
<svg xmlns="http://www.w3.org/2000/svg" version="1.2" baseProfile="tiny"
  xml:space="preserve" style="shape-rendering:geometricPrecision; fill-rule:evenodd;"
```

```

    width="200.0mm" height="130.0mm" viewBox="-1.0 -1.0 200.0 130.0">
<title>ARROW tests3</title>
<desc>Surface Current direction and speed vector</desc>
<metadata>
  <iho:S100SVG xmlns:iho="http://www.iho.int/SVGMetadata">
    <iho:Description iho:publisher="IHB" iho:creationDate="2016-04-26"
      iho:source="S111Register" iho:format="S100SVG" iho:version="0.1"/>
  </iho:S100SVG>
</metadata>
<path class="sl f0 fSTEP9" fill='none' style="stroke-width: 0.05" d=" M -.5,5. L -.5,5. -1.,-1.5 -2.,-1.5 0.,-5. 2.,-1.5
1.,-1.5 .5,5. -.5,5. Z" transform="translate(10.0 10.0) rotate(65.0) scale (1. 1.)"/>
<path class="sl f0 fSTEP8" fill='none' style="stroke-width: 0.05" d=" M -.5,5. L -.5,5. -1.,-1.5 -2.,-1.5 0.,-5. 2.,-1.5
1.,-1.5 .5,5. -.5,5. Z" transform="translate(60.0 10.0) rotate(90.0) scale (0.90 0.90)"/>
<path class="sl f0 fSTEP7" fill='none' style="stroke-width: 0.05" d=" M -.5,5. L -.5,5. -1.,-1.5 -2.,-1.5 0.,-5. 2.,-1.5
1.,-1.5 .5,5. -.5,5. Z" transform="translate(10.0 60.0) rotate(125.0) scale (0.70 0.70)"/>
<path class="sl f0 fSTEP5" fill='none' style="stroke-width: 0.05" d=" M -.5,5. L -.5,5. -1.,-1.5 -2.,-1.5 0.,-5. 2.,-1.5
1.,-1.5 .5,5. -.5,5. Z" transform="translate(60.0 60.0) rotate( 85.0) scale (0.60 0.60)"/>
<path class="sl f0 fSTEP3" fill='none' style="stroke-width: 0.05" d=" M -.5,5. L -.5,5. -1.,-1.5 -2.,-1.5 0.,-5. 2.,-1.5
1.,-1.5 .5,5. -.5,5. Z" transform="translate(110.0 60.0) rotate( 85.0) scale (0.40 0.40)"/>
<path class="sl f0 fSTEP3" fill='none' style="stroke-width: 0.05" d=" M -.5,5. L -.5,5. -1.,-1.5 -2.,-1.5 0.,-5. 2.,-1.5
1.,-1.5 .5,5. -.5,5. Z" transform="translate(160.0 60.0) rotate( 105.0) scale (0.50 0.50)"/>
<path class="sl f0 fSTEP5" fill='none' style="stroke-width: 0.05" d=" M -.5,5. L -.5,5. -1.,-1.5 -2.,-1.5 0.,-5. 2.,-1.5
1.,-1.5 .5,5. -.5,5. Z" transform="translate(160.0 120.0) rotate( 75.0) scale (0.70 0.80)"/>
</svg>

```

I.3 Sample CSS File

Below is the .css file used in the above display.

```

.layout {display:inline} /* used to control visibility of symbolBox, svgBox, pivotPoint (none
or inline) */
.symbolBox {stroke:none;stroke-width:0.03;} /* show the cover of the symbol graphics */
.svgBox {stroke:none;stroke-width:0.01;} /* show the entire SVG cover */
.pivotPoint {stroke:none;stroke-width:0.01;} /* show the pivot/anchor point, 0,0 */
.sl {stroke-linecap:round;stroke-linejoin:round} /* default line style elements */
.f0 {fill:none} /* no fill */
.sSTEP1 {stroke:#7652E2} /* sRGB line colour for colour token STEP1: S111 Step 1 color */
.fSTEP1 {fill:#7652E2} /* sRGB line colour for colour token STEP1: S111 Step 1 color */
.sSTEP2 {stroke:#4898D3} /* sRGB line colour for colour token STEP2: S111 Step 2 color */
.fSTEP2 {fill:#4898D3} /* sRGB line colour for colour token STEP2: S111 Step 2 color */
.sSTEP3 {stroke:#61CBE5} /* sRGB line colour for colour token STEP3: S111 Step 3 color */
.fSTEP3 {fill:#61CBE5} /* sRGB line colour for colour token STEP3: S111 Step 3 color */
.sSTEP4 {stroke:#6DBC45} /* sRGB line colour for colour token STEP4: S111 Step 4 color */
.fSTEP4 {fill:#6DBC45} /* sRGB line colour for colour token STEP4: S111 Step 4 color */
.sSTEP5 {stroke:#B4DC00} /* sRGB line colour for colour token STEP5: S111 Step 5 color */
.fSTEP5 {fill:#B4DC00} /* sRGB line colour for colour token STEP5: S111 Step 5 color */
.sSTEP6 {stroke:#CDC100} /* sRGB line colour for colour token STEP6: S111 Step 6 color */
.fSTEP6 {fill:#CDC100} /* sRGB line colour for colour token STEP6: S111 Step 6 color */
.sSTEP7 {stroke:#F8A718} /* sRGB line colour for colour token STEP7: S111 Step 7 color */
.fSTEP7 {fill:#F8A718} /* sRGB line colour for colour token STEP7: S111 Step 7 color */
.sSTEP8 {stroke:#F7A29D} /* sRGB line colour for colour token STEP8: S111 Step 8 color */
.fSTEP8 {fill:#F7A29D} /* sRGB line colour for colour token STEP8: S111 Step 8 color */
.sSTEP9 {stroke:#FF1E1E} /* sRGB line colour for colour token STEP9: S111 Step 9 color */
.fSTEP9 {fill:#FF1E1E} /* sRGB line colour for colour token STEP9: S111 Step 9 color */

```

ANNEX J. SURFACE CURRENT PORTRAYAL RULES

J.1 Introduction

This section summarizes the rules and formulae discussed in SECTION 9 – PORTRAYAL for display of the surface current arrow symbol. The placement of the color scale and the pick report boxes are not discussed.

The surface current feature is characterized by (1) a speed (knots) and (2) a direction (arc-degrees clockwise from north). Speed values are given to the nearest 0.01 knot, and direction values to the nearest 0.1 arc-deg. The speed and direction values are stored in the HDF file as a dataset (DS). The current speed and direction values are applicable to a specific geographic location, denoted by (1) a longitude (arc-degrees) and (2) a latitude (arc-degrees). The current is valid for a specific depth, or as a vertical average over a depth. The the depth and datum, or the averaging depth, are given in the Carrier Metadata. The current is also valid for a specific date and time, the values of which are given either as an attribute of the DS (a time stamp) or must be calculated using the time of the first value, the length of time interval, and the number in the series.

J.2 The Surface Current Symbol

Rule 1. The basic symbol for SVG is as shown in Figure J.1. The nominal height of the symbol is 10.0 mm.

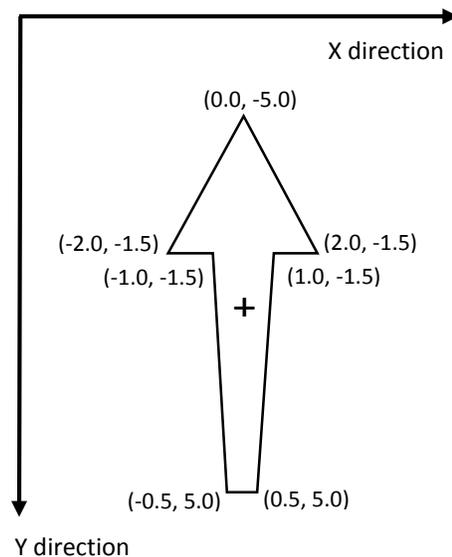


Figure J.1 - Surface current arrow symbol, showing x- and y-coordinates of the vertices (mm) and the pivot point (+).

Rule 2. A null value for speed and direction (see Table 12.1, *gridLandMaskValue*) means that the point represents land, or the value is missing. In either case, no arrow symbol is displayed.




Rule 3. The colour of the arrow is set by the band within which the speed falls. The colours for nine speed bands are shown in Table J.1.

NOTE 1: Within any speed band, the lower speed is given as the Minimum Speed in Table J.1, and the upper speed is just less than the Minimum Speed in the next higher band. Therefore in Band 2,

$$0.5 \leq \text{speed in band 2} < 1.0 \quad [\text{Eqn. J.1}]$$

NOTE 2: As an option, the speed bands may be adjusted to provide more colour contrast. For example, to emphasize lower speeds, the bands 3 and 4 could be 1.00 to 1.50 and 1.50 to 2.00. Of course, in this example, the minimum speed for band 5 would have to be reduced to 2.00 to maintain coverage for all speeds.

Table J.1 - Speed bands, colour names, RGB colour values, and resulting day colours for current speeds.

Speed Band	Min Speed (kn)	SpeedSpeed Width (kn)	Colour	Colour Scale Intensity			Displayed Colour
				Red	Green	Blue	
1	0.00	0.5	purple	118	82	226	
2	0.50	0.5	dark blue	72	152	211	
3	1.00	1.0	light blue	97	203	229	
4	2.00	1.0	dark green	109	188	69	
5	3.00	2.0	light green	180	220	0	
6	5.00	2.0	yellow-green	205	193	0	
7	7.00	2.0	orange	248	167	24	
8	10.00	3.0	pink	247	162	157	
9	13.00	99.0	red	255	30	30	

Rule 4. Colours for dusk and night are given in ANNEX H – COLOUR TABLES.

Rule 5. There is a separate symbol for each speed band. Each symbol has a unique colour.

J.3 Symbol Size and Orientation

Rule 6. The size of the arrow symbol is scaled in proportion to the current speed. The height of the arrow, H (mm), is a function of the speed of the current, S (knots). Allowances are made to (a) display a small symbol even if the speed is near zero and (b) enforce a maximum arrow size. The scaling relationship is:

$$H = H_{ref} \cdot \min\{\max(S_{low}, S), S_{high}\} / S_{ref}. \quad [\text{Eqn. J.2}]$$

The following table gives the nominal values for the four constants.

Table J.2 – Summary of recommended values for arrow display size. With these values, an arrow representing 5 kn will have a length of 10 mm.

Constant	Description	Recommended Value
H_{ref}	Reference height for arrow scaling	10 mm
S_{ref}	Reference speed for arrow scaling	5 kn
S_{low}	Minimum speed to be used for arrow length computations	0.01 kn
S_{high}	Maximum speed to be used for arrow length computations	13 kn

Rule 7. The arrow is rotated to show the direction of current using the value for direction (Figure J.2).

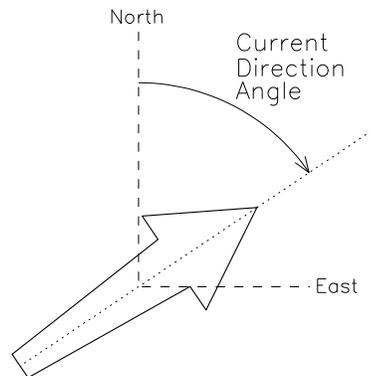


Figure J.2. Portrayal of the arrow's direction, based on the current direction. The dashed line is the arrow's centerline, and the origin of the East-North axis is at the arrow's pivot point. True north has a direction of 0 degrees.

J.4 Placement of the Symbol

Rule 8. The surface current arrow is placed in the display so that the pivot point corresponds to the given values of longitude and latitude.

Rule 9. The HO must insure that the pivot point shall not be located over land. That a portion of the arrow symbol lies over land is acceptable.

Rule 10. The HO must insure that if the arrow's pivot point lies in a geographic area designated as intertidal, then when the time-varying water depth has gone to zero the symbol is not displayed.

J.5 Thinning of a Field of Arrows

Displaying at a low resolution (i.e., zooming out) increases the density of symbols. However, by applying a thinning algorithm, vector symbol overlap can be reduced. The algorithm discussed below works for regularly gridded data only.

Suppose that the grid cell has a width of *gridSpacingLongitudinal* and height of *gridSpacingLatitudinal* (see Table 12.1), and has a diagonal distance of D mm. Note that D is dependent on the map scale of the display. Also suppose that the height of the arrow symbol for the maximum speed in the display area is H_{\max} .

Suggested Rule 11. For thinning regularly gridded data, arrows at every n^{th} column and every n^{th} row are drawn, making sure that the row and column with the maximum vector is drawn. With a R_{\max} value of 0.5,

$$n = 1 + \text{fix}\{H_{\max}/(0.5D)\} \quad [\text{Eqn. J.3}]$$

Suggested Rule 12. For thinning non-regularly spaced data, a potential solution would be to reduce the reference height H_{ref} or increase the reference speed S_{ref} (Table J.2).

J.6 Temporal Rules

Let T_s be the time selected by the user or the ENS for display of data, and let T_E be equal to *dateTimeOfLastRecord + timeRecordInterval*.

Rule 13a. If T_s is *earlier* than the timestamp of the first data in the series, *dateTimeOfFirstRecord*, no arrows are displayed.

Rule 13b. If T_s is *later* than T_E , no arrows are displayed.

Rule 13c. If T_s is *later* than the first timestamp and *earlier* than T_E , then the arrows for the data are plotted if the timestamp is (a) later than T_s , but (b) less than $T_s + \textit{timeRecordInterval}$.