INTERNATIONAL HYDROGRAPHIC ORGANIZATION



IHO ELECTRONIC NAVIGATIONAL CHART PRODUCT SPECIFICATION

Draft 0.2.0 – October 2011

Standard Number 101 Electronic Navigational Chart Product Specification

> Published by the International Hydrographic Bureau MONACO

Version Number	Date	Author	Purpose
0.1	May 2009	J. Powell	Initial Draft
0.2	June 2010	J. Powell	Merged all the phases back into a single document
0.0.3	July 2010	J. Powell	Added comments from AHO
0.0.4	September	J. Powell	Revised based on FG discussions
0.0.5	December 2010	J. Powell	Revised based on TSMAD 21
0.0.6	February 2011	J.Powell	Revised based on comments to phase 1 from 2J, FR, AU.
0.1.0	April 2011	J.Powell	Revised based on comments from TSMAD22. Changed version to 0.1.0 to reflect movement to phase 2.
0.2.0	November 2011	J.Powell	Revisions made based on comments from discussion papers circulated post TSMAD 22

January 2010

ii

Contents

Page

iii

	Overview			•
1				
1.1	Introduction			
1.2	References			
1.3	Terms, definitions and abbreviations			
1.3.1	Terms and Definitions			
1.3.2	Abbreviations			
1.4	S-101 General Data Product Description			
1.5	Data product specification metadata			8
1.5.1	IHO Product Specification Maintenance			9
2	Specification Scopes			9
2				
3	Dataset Identification			10
4	Data Content and structure			11
4.1	Introduction			
4.1	Application Schema			
4.2	Feature Catalogue			
4.3 4.3.1	Introduction			
4.3.1				
	Feature Types			
4.3.3	Feature Relationship			
4.3.4	Information Types			
4.3.5	Attributes			
4.4	Feature Object Identifier (S-57 PS 3.1)			
4.5	Scale Independent and Scale Dependent Cells			
4.5.1	Scale Independent Dataset			
4.5.2	Scale Dependent Datasets			
4.6	Display			20
4.7	Geometry (S-57 PS 2.3 and 3.8)			23
5	Coordinate Reference Systems (CRS)			
5 5.1	Coordinate Reference Systems (CRS) Introduction (S-57 PS 4.1)			
5.1	Introduction (S-57 PS 4.1)			27
5.1 5.2	Introduction (S-57 PS 4.1) Horizontal Coordinate Reference System (S-57 PS 4.1)			27 27
5.1 5.2 5.3	Introduction (S-57 PS 4.1) Horizontal Coordinate Reference System (S-57 PS 4.1) Vertical CRS for Soundings (S-57 PS 4.2)			
5.1 5.2 5.3 6	Introduction (S-57 PS 4.1) Horizontal Coordinate Reference System (S-57 PS 4.1) Vertical CRS for Soundings (S-57 PS 4.2) Data Quality (S-57 UOC)			27 27 27 27
5.1 5.2 5.3 6 6.1	Introduction (S-57 PS 4.1) Horizontal Coordinate Reference System (S-57 PS 4.1) Vertical CRS for Soundings (S-57 PS 4.2) Data Quality (S-57 UOC) Introduction			
5.1 5.2 5.3 6 6.1 6.2	Introduction (S-57 PS 4.1) Horizontal Coordinate Reference System (S-57 PS 4.1) Vertical CRS for Soundings (S-57 PS 4.2) Data Quality (S-57 UOC) Introduction Quality, Reliability and Accuracy of Bathymetric Data	Error!	Bookmark	
5.1 5.2 5.3 6 6.1 6.2 6.2.1	Introduction (S-57 PS 4.1) Horizontal Coordinate Reference System (S-57 PS 4.1) Vertical CRS for Soundings (S-57 PS 4.2) Data Quality (S-57 UOC) Introduction Quality, Reliability and Accuracy of Bathymetric Data Quality of bathymetric data	Error!	Bookmark Bookmark	27 27 27 27 27 27 000 defined. 27 000 defined.
5.1 5.2 5.3 6 6.1 6.2 6.2.1 6.2.2	Introduction (S-57 PS 4.1) Horizontal Coordinate Reference System (S-57 PS 4.1) Vertical CRS for Soundings (S-57 PS 4.2) Data Quality (S-57 UOC) Introduction Quality, Reliability and Accuracy of Bathymetric Data Quality of bathymetric data Survey reliability	Error! Error! Error!	Bookmark Bookmark Bookmark	27 27 27 27 27 27 27 not defined. not defined. not defined.
5.1 5.2 5.3 6 6.1 6.2 6.2.1 6.2.2 6.2.3	Introduction (S-57 PS 4.1) Horizontal Coordinate Reference System (S-57 PS 4.1) Vertical CRS for Soundings (S-57 PS 4.2) Data Quality (S-57 UOC) Introduction Quality, Reliability and Accuracy of Bathymetric Data Quality of bathymetric data Survey reliability Quality of sounding	Error! Error! Error! Error!	Bookmark Bookmark Bookmark Bookmark Bookmark	27 27 27 27 27 27 27 27 not defined. not defined. not defined. not defined.
5.1 5.2 5.3 6 6.1 6.2 6.2.1 6.2.2 6.2.3 6.2.3 6.2.4	Introduction (S-57 PS 4.1) Horizontal Coordinate Reference System (S-57 PS 4.1) Vertical CRS for Soundings (S-57 PS 4.2) Data Quality (S-57 UOC) Introduction Quality, Reliability and Accuracy of Bathymetric Data Quality of bathymetric data Survey reliability Quality of sounding Sounding accuracy	Error! Error! Error! Error! Error!	Bookmark Bookmark Bookmark Bookmark Bookmark	27 27 27 27 27 27 not defined. not defined. not defined. not defined. not defined.
5.1 5.2 5.3 6 6.1 6.2 6.2.1 6.2.2 6.2.3 6.2.4 6.2.5	Introduction (S-57 PS 4.1) Horizontal Coordinate Reference System (S-57 PS 4.1) Vertical CRS for Soundings (S-57 PS 4.2) Data Quality (S-57 UOC) Introduction Quality, Reliability and Accuracy of Bathymetric Data Quality of bathymetric data Survey reliability Quality of sounding Sounding accuracy Technique of sounding measurement	Error! Error! Error! Error! Error! Error! Error!	Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark	27 27 27 27 27 27 27 27 27 27 27 27 27 2
5.1 5.2 5.3 6 6.1 6.2 6.2.1 6.2.2 6.2.3 6.2.4 6.2.5 6.3	Introduction (S-57 PS 4.1) Horizontal Coordinate Reference System (S-57 PS 4.1) Vertical CRS for Soundings (S-57 PS 4.2) Data Quality (S-57 UOC) Introduction Quality, Reliability and Accuracy of Bathymetric Data Quality of bathymetric data Survey reliability Quality of sounding Sounding accuracy Technique of sounding measurement Accuracy of non-bathymetric data	Error! Error! Error! Error! Error! Error! Error!	Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark	27 27 27 27 27 27 27 27 27 27 27 27 27 2
5.1 5.2 5.3 6 6.1 6.2 6.2.1 6.2.2 6.2.3 6.2.4 6.2.5 6.3 6.3.1	Introduction (S-57 PS 4.1) Horizontal Coordinate Reference System (S-57 PS 4.1) Vertical CRS for Soundings (S-57 PS 4.2) Data Quality (S-57 UOC) Introduction Quality, Reliability and Accuracy of Bathymetric Data Quality of bathymetric data Survey reliability Quality of sounding Sounding accuracy Technique of sounding measurement Accuracy of non-bathymetric data Quality of positions	Error! Error! Error! Error! Error! Error! Error! Error!	Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark	27 27 27 27 27 27 27 not defined. not defined. not defined. not defined. not defined. not defined. not defined. not defined. not defined.
5.1 5.2 5.3 6 6.1 6.2 6.2.1 6.2.2 6.2.3 6.2.4 6.2.5 6.3 6.3.1 6.3.2	Introduction (S-57 PS 4.1) Horizontal Coordinate Reference System (S-57 PS 4.1) Vertical CRS for Soundings (S-57 PS 4.2) Data Quality (S-57 UOC) Introduction Quality, Reliability and Accuracy of Bathymetric Data Quality of bathymetric data Survey reliability Quality of sounding Sounding accuracy Technique of sounding measurement Accuracy of non-bathymetric data. Quality of positions Horizontal accuracy	Error! Error! Error! Error! Error! Error! Error! Error! Error!	Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark	27 27 27 27 27 27 not defined. not defined.
5.1 5.2 5.3 6 6.1 6.2 6.2.1 6.2.2 6.2.3 6.2.4 6.2.5 6.3 6.3.1	Introduction (S-57 PS 4.1) Horizontal Coordinate Reference System (S-57 PS 4.1) Vertical CRS for Soundings (S-57 PS 4.2) Data Quality (S-57 UOC) Introduction Quality, Reliability and Accuracy of Bathymetric Data Quality of bathymetric data Survey reliability Quality of sounding Sounding accuracy Technique of sounding measurement Accuracy of non-bathymetric data Quality of positions Horizontal accuracy Vertical accuracy	Error! Error! Error! Error! Error! Error! Error! Error! Error!	Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark	27 27 27 27 27 27 27 not defined. not defined.
5.1 5.2 5.3 6 6.1 6.2 6.2.1 6.2.2 6.2.3 6.2.4 6.2.5 6.3 6.3.1 6.3.2	Introduction (S-57 PS 4.1) Horizontal Coordinate Reference System (S-57 PS 4.1) Vertical CRS for Soundings (S-57 PS 4.2) Data Quality (S-57 UOC) Introduction Quality, Reliability and Accuracy of Bathymetric Data Quality of bathymetric data Survey reliability Quality of sounding Sounding accuracy Technique of sounding measurement Accuracy of non-bathymetric data. Quality of positions Horizontal accuracy	Error! Error! Error! Error! Error! Error! Error! Error! Error!	Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark	27 27 27 27 27 27 27 not defined. not defined.
5.1 5.2 5.3 6 6.1 6.2 6.2.1 6.2.2 6.2.3 6.2.4 6.2.4 6.2.5 6.3 6.3.1 6.3.2 6.3.3	Introduction (S-57 PS 4.1) Horizontal Coordinate Reference System (S-57 PS 4.1) Vertical CRS for Soundings (S-57 PS 4.2) Data Quality (S-57 UOC) Introduction Quality, Reliability and Accuracy of Bathymetric Data Quality of bathymetric data Survey reliability Quality of sounding Sounding accuracy Technique of sounding measurement Accuracy of non-bathymetric data Quality of positions Horizontal accuracy Vertical accuracy	Error! Error! Error! Error! Error! Error! Error! Error! Error!	Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark	27 27 27 27 27 27 27 not defined. not defined.
5.1 5.2 5.3 6 6.1 6.2 6.2.1 6.2.2 6.2.3 6.2.4 6.2.5 6.3 6.3.1 6.3.2 6.3.3 6.3.4 6.3.5	Introduction (S-57 PS 4.1) Horizontal Coordinate Reference System (S-57 PS 4.1) Vertical CRS for Soundings (S-57 PS 4.2) Data Quality (S-57 UOC) Introduction Quality, Reliability and Accuracy of Bathymetric Data Quality of bathymetric data Survey reliability Quality of sounding Sounding accuracy Technique of sounding measurement Accuracy of non-bathymetric data Quality of positions Horizontal accuracy Vertical accuracy Source of bathymetric data Source of other data	Error! Error! Error! Error! Error! Error! Error! Error! Error! Error!	Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark	27 27 27 27 27 27 27 27 not defined. not defined.
5.1 5.2 5.3 6 6.1 6.2 6.2.1 6.2.2 6.2.3 6.2.4 6.2.5 6.3 6.3.1 6.3.2 6.3.3 6.3.4 6.3.5 7	Introduction (S-57 PS 4.1) Horizontal Coordinate Reference System (S-57 PS 4.1) Vertical CRS for Soundings (S-57 PS 4.2) Data Quality (S-57 UOC) Introduction Quality, Reliability and Accuracy of Bathymetric Data Quality of bathymetric data Survey reliability Quality of sounding Sounding accuracy Technique of sounding measurement Accuracy of non-bathymetric data. Quality of positions Horizontal accuracy Source of bathymetric data Source of other data Data Capture and Classification	Error! Error! Error! Error! Error! Error! Error! Error! Error! Error! Error!	Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark	27 27 27 27 27 27 not defined. not defined. 29
5.1 5.2 5.3 6 6.1 6.2 6.2.1 6.2.2 6.2.3 6.2.4 6.2.5 6.3 6.3.1 6.3.2 6.3.3 6.3.4 6.3.5	Introduction (S-57 PS 4.1) Horizontal Coordinate Reference System (S-57 PS 4.1) Vertical CRS for Soundings (S-57 PS 4.2) Data Quality (S-57 UOC) Introduction Quality, Reliability and Accuracy of Bathymetric Data Quality of bathymetric data Survey reliability Quality of sounding Sounding accuracy Technique of sounding measurement Accuracy of non-bathymetric data Quality of positions Horizontal accuracy Vertical accuracy Source of bathymetric data Source of other data	Error! Error! Error! Error! Error! Error! Error! Error! Error! Error! Error!	Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark	27 27 27 27 27 27 not defined. not defined. 29
5.1 5.2 5.3 6 6.1 6.2 6.2.1 6.2.2 6.2.3 6.2.4 6.2.5 6.3 6.3.1 6.3.2 6.3.3 6.3.4 6.3.5 7	Introduction (S-57 PS 4.1) Horizontal Coordinate Reference System (S-57 PS 4.1) Vertical CRS for Soundings (S-57 PS 4.2) Data Quality (S-57 UOC) Introduction Quality, Reliability and Accuracy of Bathymetric Data Quality of bathymetric data Survey reliability Quality of sounding Sounding accuracy Technique of sounding measurement Accuracy of non-bathymetric data. Quality of positions Horizontal accuracy Source of bathymetric data Source of other data Data Capture and Classification	Error! Error! Error! Error! Error! Error! Error! Error! Error! Error!	Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark	27 27 27 27 27 27 27 27 27 27 27 27 27 2
5.1 5.2 5.3 6.1 6.2 6.2.1 6.2.2 6.2.3 6.2.4 6.2.5 6.3 6.3.1 6.3.2 6.3.3 6.3.4 6.3.5 7 7.1 8	Introduction (S-57 PS 4.1) Horizontal Coordinate Reference System (S-57 PS 4.1) Vertical CRS for Soundings (S-57 PS 4.2) Data Quality (S-57 UOC) Introduction Quality, Reliability and Accuracy of Bathymetric Data Quality of bathymetric data Survey reliability Quality of sounding Sounding accuracy Technique of sounding measurement Accuracy of non-bathymetric data Quality of positions Horizontal accuracy Vertical accuracy Source of bathymetric data Source of other data Data Capture and Classification Introduction Maintenance	Error! Error! Error! Error! Error! Error! Error! Error! Error! Error!	Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark	27 27 27 27 27 27 27 27 27 27 27 27 27 2
5.1 5.2 5.3 6 6.1 6.2 6.2.1 6.2.2 6.2.3 6.2.4 6.2.5 6.3.1 6.3.2 6.3.3 6.3.4 6.3.5 7 7.1 8 9	Introduction (S-57 PS 4.1) Horizontal Coordinate Reference System (S-57 PS 4.1) Vertical CRS for Soundings (S-57 PS 4.2) Data Quality (S-57 UOC) Introduction Quality, Reliability and Accuracy of Bathymetric Data Quality of bathymetric data Survey reliability Quality of sounding Sounding accuracy Technique of sounding measurement Accuracy of non-bathymetric data Quality of positions Horizontal accuracy Source of bathymetric data Source of bathymetric data Source of other data Data Capture and Classification Introduction Maintenance Portrayal	Error! Error! Error! Error! Error! Error! Error! Error! Error!	Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark	27 27 27 27 27 27 27 27 27 27 27 27 27 2
5.1 5.2 5.3 6.1 6.2 6.2.1 6.2.2 6.2.3 6.2.4 6.2.5 6.3 6.3.1 6.3.2 6.3.3 6.3.4 6.3.5 7 7.1 8	Introduction (S-57 PS 4.1) Horizontal Coordinate Reference System (S-57 PS 4.1) Vertical CRS for Soundings (S-57 PS 4.2) Data Quality (S-57 UOC) Introduction Quality, Reliability and Accuracy of Bathymetric Data Quality of bathymetric data Survey reliability Quality of sounding Sounding accuracy Technique of sounding measurement Accuracy of non-bathymetric data Quality of positions Horizontal accuracy Vertical accuracy Source of bathymetric data Source of other data Data Capture and Classification Introduction Maintenance	Error! Error! Error! Error! Error! Error! Error! Error! Error!	Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark	27 27 27 27 27 27 27 27 27 27 27 27 27 2
5.1 5.2 5.3 6 6.1 6.2 6.2.1 6.2.2 6.2.3 6.2.4 6.2.5 6.3.1 6.3.2 6.3.3 6.3.4 6.3.5 7 7.1 8 9	Introduction (S-57 PS 4.1) Horizontal Coordinate Reference System (S-57 PS 4.1) Vertical CRS for Soundings (S-57 PS 4.2) Data Quality (S-57 UOC) Introduction Quality, Reliability and Accuracy of Bathymetric Data Quality of bathymetric data Survey reliability Quality of sounding Sounding accuracy Technique of sounding measurement Accuracy of non-bathymetric data. Quality of positions Horizontal accuracy Source of bathymetric data Source of other data Data Capture and Classification Introduction Maintenance Portrayal Introduction	Error! Error! Error! Error! Error! Error! Error! Error! Error!	Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark	27 27 27 27 27 27 27 27 27 27 27 27 27 2
5.1 5.2 5.3 6 6.1 6.2 6.2.1 6.2.2 6.2.3 6.2.4 6.2.3 6.3.4 6.3.2 6.3.3 6.3.4 6.3.5 7 7.1 8 9 9.1	Introduction (S-57 PS 4.1) Horizontal Coordinate Reference System (S-57 PS 4.1) Vertical CRS for Soundings (S-57 PS 4.2) Data Quality (S-57 UOC) Introduction Quality, Reliability and Accuracy of Bathymetric Data Quality of bathymetric data Survey reliability Quality of sounding Sounding accuracy Technique of sounding measurement Accuracy of non-bathymetric data. Quality of positions Horizontal accuracy Vertical accuracy Source of bathymetric data Source of other data Data Capture and Classification Introduction Portrayal Introduction Data Product format (encoding)	Error! Error! Error! Error! Error! Error! Error! Error! Error!	Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark	27 27 27 27 27 27 27 27 27 27 27 27 27 2
5.1 5.2 5.3 6 6.1 6.2 6.2.1 6.2.2 6.2.3 6.2.4 6.2.5 6.3 6.3.1 6.3.2 6.3.3 6.3.4 6.3.5 7 7.1 8 9 9.1 10	Introduction (S-57 PS 4.1) Horizontal Coordinate Reference System (S-57 PS 4.1) Vertical CRS for Soundings (S-57 PS 4.2) Data Quality (S-57 UOC) Introduction Quality, Reliability and Accuracy of Bathymetric Data Quality of bathymetric data Survey reliability Quality of sounding Sounding accuracy Technique of sounding measurement Accuracy of non-bathymetric data. Quality of positions Horizontal accuracy Source of bathymetric data Source of other data Data Capture and Classification Introduction Maintenance Portrayal Introduction	Error! Error! Error! Error! Error! Error! Error! Error! Error! Error!	Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark Bookmark	27 27 27 27 27 27 27 27 27 27 27 27 27 2

10.1.2	Encoding of Depths (S-57 PS 4.4)	. 30
11	Data Product Delivery (S-57 PS 5.8? and 2.2)	. 30
11.1	Introduction	
11.2	Exchange Set	
11.3	Dataset	
11.3.1	Datasets (S-57 PS 5.5)	. 32
11.3.2	Dataset file naming (S-57 PS 5.6.1)	. 32
11.3.3	New Editions, Re-Issues and Updates(S-57 PS 5.7)	. 33
11.4	Support Files	
11.4.1	Support File Naming	
11.4.2	Support File Management	
11.5	Exchange Catalogue	
11.6	Data integrity (S-57 PS 5.9)	
11.6.1	ENC data integrity measures	
	Implementation Error! Bookmark not defin	
11.6.3	Processing	. 34
12	Metadata	36
12.1	Introduction	
12.1.1	Exchange Set Metadata	
12.1.2	Dataset Metadata	
	Support File Metadata	
	Exchange Catalogue File Metadata	
12.2	Language (S-57 PS 3.11)	
	oduct format (encoding) (S-57 PS 6)	
Data Pi		
A1	Introduction	. 45
A1.1	Data set files	. 45
A1.2	Records	. 45
A1.3	Fields	
A1.4	Subfields	. 45
A1.5	Base cell structure	
A1.5.1	Data Set Identification field - DSID	. 48
	Data Set Structure Information field - DSSI	
	Attribute field - ATTR	
A1.5.4	Information Type Identifier field - IRID	. 50
A1.5.5	2-D Integer Coordinate field - C2DI	. 51
	3-D Integer Coordinate field- C3DI	
A1.5.7	Feature Type Record Identifier field - FRID	. 52
A1.5.8	Feature Object Identifier field - FOID	. 52
	Spatial Association field - SPAS	
	Feature Association – FEAS	
	Theme Association field - THAS	
	Masked Spatial Type field - MASK Update dataset structure	
A1.6	Data Set Identification field - DSID	
	Data Set Structure Information field - DSI	
	Attribute field - ATTR	
	Information Association field	
Δ165	Information Type Identifier field - IRID	57
A1 6 6	2-D Integer Coordinate field – C2DI	. 58
	3-D Integer Coordinate field – C3DI	
	Feature Type Record Identifier field - FRID	
A1.6.9	Feature Object Identifier field - FOID	. 60
	Spatial Association field - SPAS	
	Feature Association – FEAS	
	Theme Association field - THAS	
	Masked Spatial Type field - MASK	
	 B	
Annex		. 05

January 2010

iv

	v	
Data Classification and Encoding Guide		63
Annex C – Normative		64
Business Rules of S-101		64
Dusiness Rules of 5-101		04

S-101

1 Overview

1.1 Introduction

S-101 is the new Electronic Navigational Chart Product specification, produced by the International Hydrographic Organization. S-101 draws upon the concepts of S-100 such as exchangeable and dynamic feature and portrayal catalogues, and richer geometric models, information types and complex attributes. The use of these new feature types will allow ENC producers to overcome a number of known encoding shortcomings in S-57 based ENCs such as the overuse of caution areas,. In addition, the improved functionality will lead to more efficient data handling and better portrayal definition within ECDIS equipment, by eliminating or reducing the number of conditional symbology procedures.

One of the major benefits in S-101 is the ability to introduce additional functionality that is not available in S-57 ENCs. S-101 ENCs will be the base navigation layer within an S-100 enabled ECDIS, and will interact with other S-100 based product specifications such as predicted tides, port operations information and nautical publications.

1.2 References

S-100 IHO Universal Data Model

1.3 Terms, definitions and abbreviations

1.3.1 Use of Language

Within this document:

- "Must" indicates a mandatory requirement.
- "Should" indicates an optional requirement, that is the recommended process to be followed, but is not mandatory.
- "May" means "allowed to" or "could possibly", and is not mandatory.

1.3.2 Terms and Definitions

Data set

an identifiable collection of data [ISO 19115].

ENC

The database, standarized as to content, structure and format, issued for use with ECDIS by or on the authority of a Government authorized Hydrographic Office or other relevant government institution, and conform to IHO standards. The ENC contains all the chart information necessary for safe navigation and may contain supplementary information in addition to that contained in the paper chart which may be considered necessary for safe navication.

ENC data set

Geographic division of the ENC data for distributing purposes

ENC Product Specification

The set of specifications intended to enable the production of a consistent ENC, and manufacturers to use that data efficiently in an ECDIS that satisfies the IMO Performance Standards for ECDIS. An ENC must be produced in accordance with the rules defined in this Specification and must be encoded using the rules described in the Data Capture and Classification Guide.

point

0-dimensional geometric primitive, representing a position

S-101

January 2010

curve

1-dimensional geometric primitive, representing the continuous image of a line

NOTE: The **boundary** of a **curve** is the **set** of **points** at either end of the **curve**. If the curve is a cycle, the two ends are identical, and the curve (if topologically closed) is considered to not have a boundary. The first **point** is called the **start point**, and the last is the **end point**. Connectivity of the curve is guaranteed by the "continuous image of a line"

curve segment

1-dimensional **geometric object** used to represent a continuous component of a **curve** using homogeneous interpolation and definition methods

NOTE: The geometric set represented by a single curve segment is equivalent to a curve

1.3.3 Abbreviations

INU	International Hydrographic Organization
ENC	Electronic Navigational Chart

International Hydrographic Organization

- SENC System Electronic Navigational Chart
- IMO International Maritime Organization
- ISO International Organization for Standardization
- ECDIS Electronic Chart Display Information System
- SOLAS Safety of Life at Sea
- CRS Coordinate Reference System
- EPSG European Petroleum Survey Group

1.4 S-101 General Data Product Description

Note: This information contains general information about the data product.

Title: Electronic Navigational Chart

- Abstract: An Electronic Navigational Chart (ENC) is a vector chart produced on the authority of a government authorized Hydrographic Office. Its primary function is for use within an Electronic Chart Display and Information Systems (ECDIS) to meet International Maritime Organisation (IMO) and Safety Of Life At Sea (SOLAS) chart carriage requirements. The ENC contains an extraction of real world information necessary for the safe navigation of vessels.
- **Content:** This Product Specification is a complete description of all the appropriate features, attributes and their relationships necessary to define an ENC data product. The precise content is documented within the Feature Catalogue and the relationships defined in the Application Schema. Details of how these features should be symbolised are contained in the associated Portrayal Catalogue.

Spatial Extent:

S-101

Description: Areas specific to marine navigation.

East Bounding Longitude: 180

West Bounding Longitude: -180

North Bounding Latitude: 90

South Bounding Latitude -90

NOTE: Datasets may cross the 180 degree longitude line

Purpose: The purpose of an ENC dataset is to provide official navigational data to an Electronic Chart Display and Information System (ECDIS) for the safe passage of vessels between destinations.

1.5 Data product specification metadata

Note: This information uniquely identifies this Product Specification and provides information about its creation and maintenance.

Title:	The International Hydrographic Organization Electronic Navigational Chart Product Specification
S-100 Version:	1.0.0
S-101 Version:	0.2.0
Date:	November 2011
Language:	English
Classification:	Unclassified
Contact:	International Hydrographic Bureau (IHB)
	4 Quai Antoine 1er
	B.P. 445 MC 98011 MONACO CEDEX Telephone: +377 93 10 81 00 Fax: + 377 93 10 81 40
URL:	www.iho.int
Identifier:	S-101
Maintenance:	Changes to the Product Specification S-101 are coordinated by Transfer Standards Maintenance and Applications Development Working Group (TSMAD) of the IHO and shall be made available via the IHO web site. Maintenance of the Product Specification shall conform to IHO Technical Resolution 2/2007 (revised 2010).

1.5.1 IHO Product Specification Maintenance

1.5.1.1 Introduction

Changes to S-101 will be released by the IHO as a new edition, revision, or clarification.

1.5.1.2 New Edition

New Editions of S-101 introduce significant changes. *New Editions* enable new concepts, such as the ability to support new functions or applications, or the introduction of new constructs or data types. *New Editions* are likely to have a significant impact on either existing users or future users of S-101.

1.5.1.3 Revisions

Revisions are defined as substantive semantic changes to S-101. Typically, revisions will change S-101 to correct factual errors; introduce necessary changes that have become evident as a result of practical experience or changing circumstances. A *revision* shall not be classified as a clarification. *Revisions* could have an impact on either existing users or future users of S-101. All cumulative *clarifications* must be included with the release of approved corrections revisions.

In most cases a new feature or portrayal catalogue will result in a revision of S-101.

1.5.1.4 Clarification

Clarifications are non-substantive changes to S-101. Typically, clarifications: remove ambiguity; correct grammatical and spelling errors; amend or update cross references; insert improved graphics in spelling, punctuation and grammar. A clarification must not cause any substantive semantic change to S-101.

1.5.1.5 Version Numbers

The associated version control numbering to identify changes (n) to S-101 shall be as follows:

New Editions denoted as **N**.0.0

Revisions denoted as n. ${f n}.0$

Clarifications denoted as n.n.n

2 Specification Scopes

Scope ID: Root scope

- Level: Dataset
- Level name: ENC Dataset

S-101

3 Dataset Identification

A dataset that conforms to this Product Specification will be identifiable by the discovery metadata that supports it.

Title:	Electronic Navigational Chart
Alternate Title:	ENC
Abstract:	When an S-101 ENC is produced it must be in accordance with the rules defined in the S-101 Product Specification. S-101 details specifications intended to enable Hydrographic Offices to produce a consistent ENC, and manufacturers to use that data efficiently in an ECDIS to satisfy IMO Performance Standards for ECDIS.
Topic Category:	Transportation
Geographic Description:	Areas specific to marine navigation.
Spatial Resolution:	The optimum scales for ENC have been aligned with the standard RADAR ranges and are as follows:

Standard RADAR Ranges	Optimum Scale
200 NM	1:3,000,000
96 NM	1:1,500,000
48 NM	1:700,000
24NM	1:350,000
12 NM	1:180,000
6 NM	1:90,000
3 NM	1:45,000
1.5 NM	1:22,000
0.75 NM	1:12,000
0.5 NM	1:8,000
0.25 NM	1:4,000
	<1:4,000

Table 1: Optimum Display Scales

Purpose:	Electronic Navigational Chart for use in Electronic Chart Display and Information Systems
Language:	English (Mandatory), other (Optional)
Classification:	Data can be classified as one of the following:
	Unclassified Restricted

S-101

Secret Top Secret
Vector
Producing Agency
Not to be used for navigation on land.

Confidential

4 Data Content and structure

4.1 Introduction

An S-101 ENC is a feature-based product. This section contains the product Application Schema expressed in UML and an associated Feature Catalogue. The Feature Catalogue provides a full description of each feature type including its attributes, attribute values and relationships in the data product.

4.2 Application Schema

S-101 is based on the General Feature Model (GFM) from S-100. The GFM is the conceptual model and the implementation is defined in the Feature Catalogue.

4.3 Feature Catalogue

4.3.1 Introduction

The S-101 Feature Catalogue describes the feature types, information types, attributes, attribute values, associations and roles which may be used in an ENC.

The S-101 Feature Catalogue will be available in an XML document which conforms to the S-100 XML Feature Catalogue Schema. The S-101 Feature Catalogue is available from the IHO website.

4.3.2 Feature Types

4.3.2.1 Geographic

Geographic (geo) feature types form the principle content of the ENC and are fully defined by their associated attributes and information types.

4.3.2.1.1 Skin of the Earth

Skin of the Earth features are a set of geo features of geometric type area that must not overlap each other and form a continuous surface named "Skin of the Earth".

DepthArea (DEPARE)

DredgedArea (DRGARE)

LandArea (LNDARE)

UnsurveyedArea (UNSARE)

S-101

January 2010

Each area covered by a meta feature Data**Coverage** with categoryOfCoverage = 1 must be totally covered by a set of geo features of type area from the above list that do not overlap each other (the Skin of the Earth). The geometry of coincident boundaries between Skin of the Earth features must not be duplicated.

4.3.2.2 Meta (S-57 PS 3.4)

Meta features contain information about other features within a data set. Information defined by meta features override the default metadata values defined by the data set descriptive records.

The maximum use must be made of meta features to reduce meta attribution on individual features.

The Meta feature DataCoverage provides an exhaustive, non-overlapping coverage of the entire cell.

4.3.2.3 Aggregated (S-57 PS 3.9)

An Aggregated Feature Type is a feature which is made up of component features. See clause 4.3.3.1 for Feature Associations.

EXAMPLE 1 Traffic Separation Scheme feature of type aggregation may be composed of Traffic Separation Lane Parts, Precautionary Area, etc. (Feature Association is a Composition, see clause 4.3.3.3)


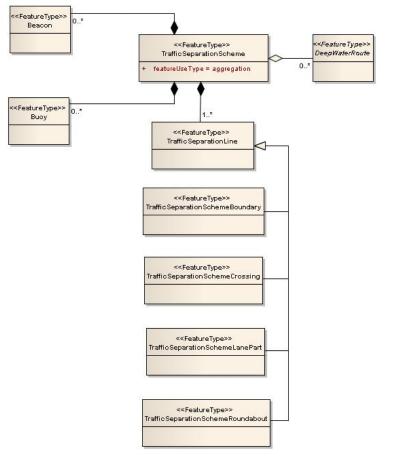


Figure 1 - Aggregation

0

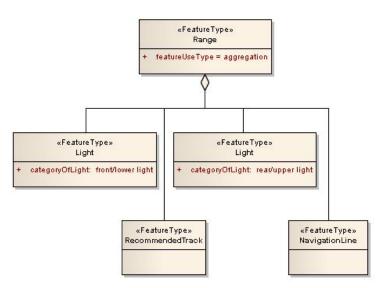

EXAMPLE 2 A range of type aggregation is composed of a Navigation Line, front beacon, rear beacon and recommended track. (For a Feature Association as an Aggregation, see clause 4.3.3.2)

Figure 2 - Aggregation

4.3.3 Feature Relationship

A feature relationship links instances of one feature type with instances of the same or a different feature type. There are three types of defined feature relationships in S-101 as described in the following sub clauses.

4.3.3.1 Association

An association is used to describe a relationship between two feature types that involves connections between their instances.

EXAMPLE A Lateral Buoy carries a Topmark which is referenced by a Feature Association named Equipment. The Lateral Buoy may also carry an Information Type named Chart Note which carries general information about the buoy which is referenced by an Information Association named Additional Information.

S-101

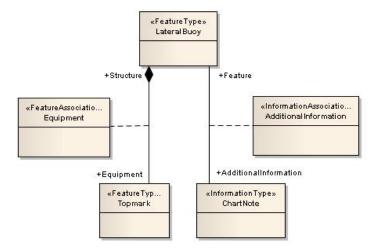


Figure 3 - Association

4.3.3.2 Aggregation

An aggregation is a relationship between two feature types, in which one of the feature types plays the role of a container and the others play the role of containee.

EXAMPLE Navigation Line, recommended track, rear and front beacon are a member of a range group.

4.3.3.3 Composition


A composition is a strong aggregation. In a composition, if a container object is deleted then all of its containee objects are deleted as well.

EXAMPLE If a feature type of TSS is deleted, then all of its component feature types that make up the TSS are deleted.

4.3.4 Information Types

Information types are identifiable pieces of information in a dataset that can be shared between other features. They have attributes but have no relationship to any geometry; information types may reference other information types.

S-101

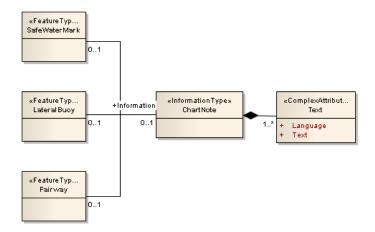



4.3.5 Attributes

4.3.5.1 Numeric Attribute Values (S-57 PS 3.5.4)

Floating point or integer attribute values must not be padded by non-significant zeroes.

4.3.5.2 Complex Attributes

Complex attributes are aggregations of other attributes that are either simple or complex. The aggregation is defined by means of attribute bindings.




Figure 5 - Complex Attribute

4.3.5.3 Text Attribute Values (S-57 PS 3.5.5)

Character strings must be encoded using the character set defined in ISO 10646-1, in Unicode Transformation Format-8 (UTF-8).

4.3.5.3.1 Text Placement

The text encoded in the object name attribute of a feature can be given an anchor point that specifies the placement of the text within an ECDIS. When a feature is encoded with an object name and the compiler wishes the text to appear in a specific place a text placement complex attribute must be encoded detailing the true bearing in degrees and the distance value from the feature.

4.3.5.4 Mandatory Attribute Values (S-57 PS 3.5.2)

There are four reasons why attribute values may be considered mandatory:

- They determine whether a feature is in the display base,
- · Certain features make no logical sense without specific attributes,
- · Some attributes are necessary to determine which symbol is to be displayed,
- Some attributes are required for safety of navigation.

All mandatory attributes are identified in the Feature Catalogue and summarised in Annex B – Data Classification and Encoding Guide.

4.3.5.5 Missing Attribute Values (S-57 PS 3.5.1)

In a base data set, when an attribute code is present but the attribute value is missing, it means that the producer wishes to indicate that this attribute value is unknown.

In an update data set, when an attribute code is present but the attribute value is missing it means:

- that the value of this attribute is to be replaced by an unknown value if it was present in the original data set,
- that an unknown value is to be inserted if the attribute was not present in the original data set.

Comment [JLP1]: TO BE DISCUSSED at TSMAD23 using paper TSMAD22/DIPWG 3 – 11.11 as a base.

S-101

January 2010

4.4 Feature Object Identifier (S-57 PS 3.1)

Each real world feature and instances of information type within an ENC must have a unique universal Feature Object Identifier.

For ENC the Feature Object Identifier may be used to identify multiple instances of the same real world feature within a single cell or across multiple cells. For example, the same feature may appear in different optimum display scales, or a feature may be split by the cell structure. In these circumstances each instance of this feature should have the same identifier.

Feature Object Identifier's must not be reused, even when a feature has been deleted.

4.5 Scale Independent and Scale Dependent Cells

ENC producers can make the decision to partition a set of navigational data into two separate cells based on the scale dependent and scale independent geometric properties of features. This concept splits a collection of data into two groups. The primary advantage of this structure is that receiving systems only hold the scale independent features once, instead of multiple occurrences at different display scales. This in turn effectively reduces the file size of an ENC exchange set and increases the speed at which updates can be applied to cells.

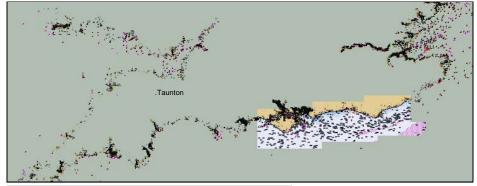


Figure ?? A scale independent cell overlaid with three scale dependant cells.

4.5.1 Scale Independent Dataset

There can be more than one scale independent cell contained within an exchange set. To view scale independent data in a receiving system there must be an accompanying cell containing the scale dependent data for that area. A scale independent cell will not contain any meta features. A nation responsible for the population of a scale independent data set will be obligated to produce scale dependent data sets of the same area. The display scale of the cell must be set to 0. All features within a scale independent cell must have the attribute, scale minimum and (scale max?) encoded.

S-101

January 2010

Comment [JLP2]: TO BE DISCUSSED AT TSMAD 23 via Paper...

4.5.1.1 Scale Independent Dataset Content

Listed in Table 2 are the allowable features and their geometric primitive types which make up the content of a scale independent cell.

ACROYNM	NAMES	GEOMETRIC TYPE	UKHO FODB	NOAA Scale Independent Features
BCNCAR	Beacon, cardinal	Р	Р	Р
BCNISD	Beacon, isolated danger	Р	Р	Р
BCNLAT	Beacon, lateral	Р	Р	Р
BCNSAW	Beacon, safe water	Р	Р	Р
BCNSPP	Beacon, special purpose/general	Р	Р	Р
BUISGL	Building single	P, A	Р	
BOYCAR	Buoy, cardinal	Р	Р	Р
BOYISD	Buoy, isolated danger	Р	Р	Р
BOYLAT	Buoy, lateral	Р	Р	Р
BOYSAW	Buoy, safe water	Р	Р	Р
BOYSPP	Buoy, special purpose	Р	Р	Р
BOYINB	Buoy, installation	Р	Р	Р
CGUSTA	Coastguard station	Р	Р	
CHKPNT	Check point	Р		
CTRPNT	Control Point	Р		
DAYMAR	Day mark	Р	Р	Р
DISMAR	Distance mark	Р		
FOGSIG	Fog signal	Р	Р	Р
DWRTCL	Deep water route centreline	L		
DWRTPT	Deep water route part	A		
FORSTC	Fortified structure	Р	Р	
LNDMRK	Landmark	Р	Р	
LIGHTS	Light	Р	Р	Ρ

S-101

LITFLT	Light Float	Ρ	Р	Р
LITVES	Light vessel	Р	Р	Р
MORFAC	Mooring/Warping facility	Р	Р	
PILPNT	Pile	Р		
PILBOP	Pilot boarding place	Р		
OBSTRN	Obstruction	Р		
OFSPLF	Offshore platform	Р	Р	
OSPARE	Offshore production area	A		
PILBOP	Pilot boarding place	P, A		
PRCARE	Precautionary area	P, A		
PYLONS	Pylon/bridge support	Р	Р	
RADRFL	Radar reflector	Р		Р
RADSTA	Radar station	Р	Р	Р
RTPBCN	Radar transponder beacon	Р	Р	Р
RDOCAL	Radio calling-in point	Р	Р	
RDOSTA	Radio station	Р	Р	Р
RECTRC	Recommended track	L		
RSCSTA	Rescue station	Р	Р	
SISTAT	Signal station, traffic	Р	Р	
SISTAW	Signal station, warning	Р	Р	
SILTNK	Silo/tank	Р	Р	
TOPMAR	Top mark	Р	Р	Р
TSELNE	Traffic separation line	L		
TSEZNE	Traffic separation zone	A		
TSSBND	Traffic separation scheme boundary	L		
TSSCRS	Traffic separation scheme crossing	A		
TSSLPT	Traffic separation scheme lane part	A		

S-101

January 2010

TSSRON	Traffic separation scheme roundabout	A	
TWRTPT	Two-way route part	A	
UWTROC	Underwater/awash rock	Ρ	
WRECKS	Wreck	P, A	

4.5.2 Scale Dependent Datasets

Scale dependent datasets will not contain any of the feature classes present in the scale independent list. Scale dependent datasets with the same display scale may overlap. However, data within must not overlap. Therefore, in the area of overlap only one dataset may contain data.

4.6 Display

Display scale shall be the optimum viewing scale of the data within the dataset. In addition to the optimum display scale the producer will encode the maximum and minimum display scales an ENC can be viewed at.

Certain metadata values are required for the loading and display of ENCs in ECDIS and are therefore included in the ENC dataset itself, these are defined in the Feature Catalogue as dataset attributes and carried in the Dataset General Information record of the ISO 8211 encoding.

4.6.1 Optimum Display Scale (OPTDSC)

The optimum display scale shall be set at one of the spatial resolutions specified in clause 3 and is carried in the DSID as OPSC.

4.6.2 Minimum Display Scale (MINDSC)

The minimum display scale shall be the smallest scale which the ENC should be displayed. The minimum display scale shall be set at one of the spatial resolutions specified in clause 3 and is carried in the DSID as MISC.

4.6.3 Maximum Display Scale (MAXDSC)

The maximum display scale shall be the largest scale at which the ENC should be displayed without the ECDIS giving an overscale warning. The maximum display scale shall be set at one of the spatial resolutions specified in clause 3 and is carried in the DSID as MASC.

4.6.4 Dataset Loading and Unloading

The ENC in the ECDIS consists of a mosaic of different datasets. The geographic coverage is not always complete throughout the viewing spectra, e.g. scale dependent ENCs suitable for the large scale viewing interval may only exist for ports.


The optimum display scale indicates to the ECDIS what the intended display scale of the dataset, while minimum display scale indicates the minimum viewing scale for the dataset before the next dataset shall be loaded. In addition, maximum display scale shall be the largest scale that the ENC can be displayed at.

S-101

Comment [JLP3]: TO BE DISCUSSED at TSMAD 23 via paper...

When the dataset has exceeded the maximum display scale the ECDIS shall trigger the overscale warning.

S-101

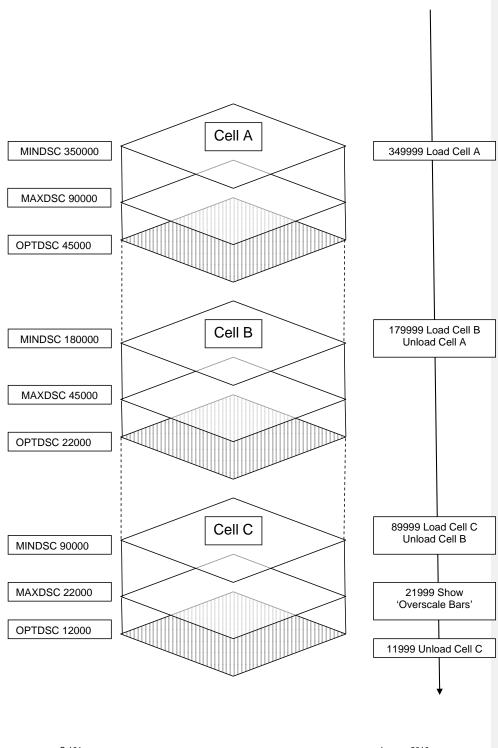

22

S-101

4.7 Geometry (S-57 PS 2.3 and 3.8)

Figure 6 - Geometry

January 2010

Comment [JLP4]: UML needs to be constrained to loxodromic.

4.7.1 S-100 Level 3a Geometry

The underlying geometry of an ENC is constrained to S-100 level 3a which supports 0, 1 and 2 dimensional objects (points, curves and surfaces).

Level 3a is described by the following constraints:


- Each curve must reference a start and end point (they may be the same).
- Curves must not self intersect. See Figure 7.
- A curve must not be self tangent
- Areas are represented by a closed loop of curves beginning and ending at a common point.
- In the case of areas with holes, all internal boundaries must be completely contained within the external boundary and the internal boundaries must not intersect each other or the external boundary. Internal boundaries may touch tangentially (i.e. at one point). See Figure 8.
- The outer boundary of a surface must be in a clockwise direction (surface to the right of the curve) and the curve orientation positive. The inner boundary of a surface must be in a counter-clockwise direction (surface to the right of the curve) and the curve orientation negative. See Figure 9.


S-101 further constrains Level 3a with the following:

- Coincident linear geometry must be avoided when there is a dependency between features.
- The interpolation on GM_CurveSegment must be loxodromic.
- Linear features must not be encoded at a point density greater than .3mm at optimum display scale

The following exception applies to S-101:

• The use of coordinates is restricted to two dimensions, except in the case of soundings which use GM_Point or GM_Multipoint with three dimensional coordinates.

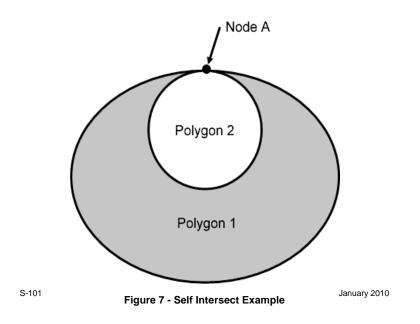

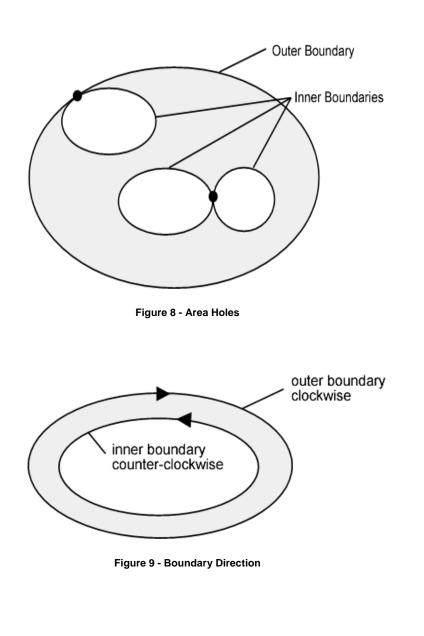

January 2010

4.7.2 Masking

The presentation of symbolised lines may be affected by line length. In certain circumstances, the symbolisation of an edge may need to be suppressed. This is done using the Masked Spatial Type [MASK] field of the Feature Type record. The Mask Update Instruction [MUIN] must be set to {1} and Referenced Record name [RRNM] and Referenced Record identifier [RRID] fields must be populated with the values of the referenced spatial record.




Figure 10 - Example without Masking




Figure 11 - Example of masked edge between Rivers and DEPARE features

S-101

5 Coordinate Reference Systems (CRS)

5.1 Introduction (S-57 PS 4.1)

Due to the nature of hydrography it is common practice to separate the horizontal and vertical part of a position. This leads to 2D Coordinate Reference Systems for the horizontal positions and 1D Coordinate Reference Systems for the vertical positions. To describe 3D coordinates those Coordinate Reference Systems must be combined to produce a compound Coordinate Reference System. An ENC data set must define at least one compound CRS. An ENC compound CRS is composed of a 2D geodetic CRS (WGS84) and a vertical CRS.

5.2 Horizontal Coordinate Reference System (S-57 PS 4.1)

For ENC the geodetic datum of the horizontal CRS must be EPSG:4326 (WGS84). No projection is to be used. If the CRS EPSG:4326 is not defined in the encoding by referencing then it must be fully defined, encoding all parameters and referenced to a geodetic Coordinate Reference System which incorporates an ellipsoidal coordinate system with axes graduated in degrees. The full reference to EPSG:4326 can be found at www.epsg-registry.org.

5.3 Vertical CRS for Soundings (S-57 PS 4.2)

Although all coordinates in a data set must refer to the same horizontal CRS different Vertical Datums can be used for the depth component of a coordinate tuple. Therefore the vertical CRS can be repeated. For each Vertical CRS a unique identifier is defined. Those identifiers will be used to indicate which Vertical CRS is used. Units must be in metres.

In S-101 depths are represented by positive values down and negative values for intertidal soundings (drying heights).

6 Data Quality

6.1 Introduction

For an ENC, the data quality shall be validated using S-58 Recommended ENC Validation Checks and is defined by the following elements:

6.1.1 DQ_Scope

Name	Multiplity	Value	Туре	Remarks
DQ_Scope	-		-	
level	1		MD_ScopeCode	
extent	01		EX_Extent	
levelDescription	0*		S100_MD_ScopeDescription	

S-101

6.1.2 DQ_Element

Name	Multiplity	Value	Туре	Remarks
DQ_Element	-		-	
nameOfMeasure	0*		CharacterString	
measureldentification	01		MD_Identifier	
measureDescription	01		CharacterString	
evulationMethodType	01		DQ_EvaluationMethodTypeC ode	
evaluationMethodDescriptio n	01		CharacterString	
dateTime	01		DateTime	
result	12		DQ_Result	

6.1.3 DQ_Result

6.1.3.1 DQ_ConformanceResult

Name	Multiplity	Value	Туре	Remarks
DQ_ConformanceResult	-		-	
Specification	-	S-58	CI_Citation	Dataset conforms to S-58
Explanation	-		CharacterString	
Pass	-	{1} or {2}	Boolean	1. Yes
				2. No

6.1.3.2 DQ_QuantitativeResult

Name	Multiplity	Value	Туре	Remarks
DQ_QuantitativeResult	-		-	
valueType	01		recordType	
valueUnit	01		S100_UnitOfMeasure	
errorStatistic	01		CharacterString	
Value	1*		Record	

7 Data Capture and Classification

7.1 Introduction

The S-101 ENC Data Classification and Encoding Guide (DCEG) provides the information to map real world features into the dataset. This Guide is located in Annex B. S-101 datasets shall conform to the ENC DCEG.

8 Maintenance

Maintenance and Update Frequency:

Datasets are maintained as needed and must include mechanisms for ENC updating for both Notices to Mariners and New Editions designed to meet the needs of the mariner regarding safety of navigation.

Data Source:

Data Producers must use applicable sources to maintain and update data and provide a brief description of the sources that were used to produce the dataset in the appropriate metadata field.

Production Process:

Data Producers should follow their established production processes for maintaining and updating datasets. Datasets shall be checked against S-58 (equivalent). Data is produced against the DCEG, checked against S-58 and encapsulated in 8211.

9 Portrayal

9.1 Introduction

The display of features contained in an S-101 dataset is determined by the symbology and portrayal rules contained in the S-101 Portrayal Catalogue.

The S-101 Portrayal Catalogue will be available in an XML document which conforms to the S-100 XML Portrayal Catalogue Schema. The S-101 Portrayal Catalogue is available from the IHO website.

Item Name	Description	M/O	Card	type
portrayalLibraryCitation	Bibliographic reference to the portrayal library	0	01	CI_Citation (ISO 19115)

NOTE: THIS SECTION TO BE FILLED OUT BY MAY. IT SHOULD CONTAIN THE PORTRAYAL CATOLUE STRUCTURE – SIMILAR TO CLAUSE FOUR OF THIS DOCUMENT. It may also contain pieces of S-52 that are still needed (both here or as an normative annex and business rules)

S-101

10 Data Product format (encoding)

10.1 Introduction

This clause specifies the encoding for S-101 datasets. See Annex A for a complete description of the data records, fields and subfields defined in the encoding.

Format Name:	ISO/IEC 8211
Version:	1.0.0
Character Set:	ISO 10646 Base Multilingual Plane
Specification:	S-100 profile of ISO/IEC 8211 (part 10A)

10.1.1 Encoding of Latitude and Longitude (S-57 PS 4.4)

Coordinates are stored as integers. Latitude and longitude are converted to integers using a multiplication factor held in the Data Set Structure Information field under CMFX and CMFY.

These coordinate multiplication factors must be set to 10000000 (10⁷) for all datasets.

EXAMPLE A longitude = 42.0000 is converted into X = longitude * CMFX = 42.0000 * 10000000 = 420000000.

10.1.2 Encoding of Depths (S-57 PS 4.4)

Depths are converted from decimal metres to integers by means of the CMFZ. This product limits the resolution to two decimal places and therefore the CMFZ must be set to 100.

11 Data Product Delivery (S-57 PS 5.8? and 2.2)

11.1 Introduction

This clause specifies the encoding and delivery mechanisms for an S-101 ENC. Data which conforms to this product specification must be delivered by means of an exchange set.

30

31

11.2 Exchange Set

S-101 datasets will be grouped into exchange sets. Each exchange set will consist of one or more ENC datasets with an associated XML metadata file and a single Exchange Catalogue XML file containing metadata. It may also include one or more support files, each of which will also be accompanied by an XML metadata file.

Units of Delivery	y:	Exchange Set

Transfer Size: Unlimited

Medium Name: Digital data delivery

Other Delivery Information:

Each exchange set has a single exchange catalogue which contains the discovery meta data for each data set and references to any support files.

Support files are supplementary information which are linked to by the following fields within the cells.

- TXTDSC
- NTXTDS
- PICREP

An exchange set is encapsulated into a form suitable for transmission either on hard or soft media by a mapping called an encoding. An encoding translates each of the elements of the exchange set into a logical form suitable for writing to media and for transmission online. An encoding may also define other elements in addition to the exchange set contents (i.e media identification, data extents etc...) and also may define commercial constructs such as encryption and compression methods.

This product specification defines a single example encoding for ENC exchange sets which is described in the next section. This encoding provides a hard-media / file based encoding for an exchange set with no encrypted or compressed contents and an additional file based cyclic redundancy check. It is not intended that this encoding is used for commercial distribution of ENC data as it contains no copy protection mechanisms or data authentication means. ENCs may be distributed commercially: the IHO S-63 standard and approved mechanisms such as SENC distribution support this.

Data conforming to S-101 shall be transformed, but not changed

The S-101 Product Specification defines an encoding which can be used as a default for transmission of data between parties.

The encoding encapsulates exchange set elements as follows:

- ENC datasets ISO 8211 encoding of features/attributes and their associated geometry and metadata. Defined further in Annex ??.
- Exchange Catalogue the XML encoded representation of exchange set catalogue features [discovery metadata]. Includes an additional file level CRC check per dataset.
- Supplementary files These are contained within the exchange set as files and the map from the name included within the cell and the physical location on the media is defined within the Exchange Catalogue.

S-101

Comment [JLP5]: COVERD BY PAPER SUBMITTED TO TSMAD 23.

11.3 Dataset

11.3.1 Datasets (S-57 PS 5.5)

Three types of ENC dataset may be produced and contained within an exchange set:

- Update: Changing some information in an existing data set.
- re-issue of a data set : including all the updates applied to the original data set up to the date of the reissue. A re-issue does not contain any new information additional to that previously issued by updates.
- New dataset and new edition of a dataset: Including new information which has not been
 previously distributed by updates. Each new edition of a data set must have the same name
 as the data set that it replaces. A new edition can also be ENC data has previously been
 produced for this area and at the same optimum display scale

Datasets shall not exceed 10MB.

Updates shall not exceed 50kb.

A Data Set is a grouping of features, attributes, geometry and metadata which comprises a specific coverage. A data set can contain more than one DataCoverage. The data boundary is defined by the extent of the DataCoverage features.

Features with the geometric properties of point or line coincident with the border of two data sets with the same display scale must be part of only one data set.

When a feature extends across data sets at the same optimum display scale its geometry must be split at the data set boundaries and its complete attribute description must be repeated in each data set.

In order to facilitate the efficient processing of ENC data the geographic coverage of a given optimum display scale must be split into data sets. Each data set must be contained in a physically separate, uniquely identified file on the transfer medium.

An ENC update data set must not change the limit of data coverage for the base ENC cell. Where the limit of data coverage for a base ENC cell is to be changed, this should be done by issuing a new edition of the cell.

Data Sets within the same spatial resolution (optimum scale) may overlap. However, data within the data set must not overlap. Therefore, in the area of overlap only one data set may contain data, all other cells must have a meta feature Data**Coverage** with categoryOfCoverage = 2 covering the overlap area. This rule applies even if several producers are involved. There must be no overlapping data of the same scale, except at the agreed adjoining national data limits, where, if it is difficult to achieve a perfect join, a 5 metre overlapping buffer zone may be used.

Data Sets may cross the 180° meridian.

11.3.2 Dataset file naming (S-57 PS 5.6.1)

ENC Dataset files

ENC dataset files are named according to the specifications given below:

CCXXXXXXX.EEE

The main part forms an identifier where:

• the first two characters identify the issuing agency.

S-101

Comment [JLP6]: PART OF the OUTSTANDING ISSUES TSMAD 23

- the third to tenth characters are optional and may When a feature pointing to a text, picture
 or application file is deleted or updated so that it no longer references the file, the ECDIS
 software should check to see whether any other feature referenced the same file, before that
 file is deleted.
- be used in any way by the producer to provide the unique file name. The following characters are allowed in the dataset name, A to Z, 0 to 9 and the special character _ (underscore).
- .EEE new editions use 000, updates start at 001 and increment until a limit of 999.

Each re-issue or new edition of a dataset must have the same name as the base dataset which it replaces.

11.3.3 New Editions, Re-Issues and Updates(S-57 PS 5.7)

This section defines the sequencing of S-101 datasets for New Editions, Updates and Re-issues. In order to ensure that feature type updates are incorporated into an ECDIS in the correct sequence without any omission, a number of parameters encoded in the data are used in the following way:

edition number	when a data set is initially created, the edition number 1 is assigned to it. The edition number is increased by 1 at each new edition.
update number	update number 0 is assigned to a new data set. The first update cell file associated with this new data set must have update number 1. The update number must be increased by one for each consecutive update, until a new edition is released. The new edition must have update number 0.
Re-issue number	A re-issue of a data set must have the update number of the last update applied to the dataset. In the case of an update dataset the file extension is the same as the update number.
update comment	comment for describing the change introduced by an update.
issue date	date up to which the data producer has incorporated all applicable changes.

In order to cancel a data set, an update cell file is created for which the edition number must be set to 0. This message is only used to cancel a base cell file. Where a cell is cancelled and its name is re used at a later date, the issue date must be greater than the issue date of the cancelled cell.

An exchange set may contain base cell files and update cell files for the same cells. Under these circumstances the update cell files must follow on in the correct sequential order from the last update applied to the base cell file.

11.4 Support Files

Data set support files offer supplementary information that can be included in an ENC exchange set.

- Text files must contain only general text as defined by this standard. (Extensible mark-up language (XML) supports UTF-8 character encoding). (TXT), (XML), (HTM)
- Picture files must be in TIFF 6.0 specification (TIFF)

File Types	Extens	Extensions		
Text	TXT			
	HTM			
	XML			
Picture	TIFF	Baseline TIFF 6.0		

S-101

11.4.1 Support File Naming

All support files will have unique world-wide file identifiers. The file identifier of support information should not be used to describe the physical content of the file. The support file metadata that accompanies the file will inform the user of the name and purpose of the file (i.e. new, replacement and deletion).

In this encoding the support files are named according to the specifications given below:

CCXXXXXXXX.EEE

The main part forms an identifier where:

- the first two characters identify the issuing agency.
- the third to tenth characters can be used in any way by the producer to provide the unique file name. The following characters are allowed in the dataset name, A to Z, 0 to 9 and the special character _ (underscore).
- .EEE support file extension.

11.4.2 Support File Management

Placeholder until this gets fleshed out.

11.5 Exchange Catalogue

The exchange catalogue acts as the table of contents for the exchange set. The catalogue file of the exchange set must be named CATALOG.101. No other file in the exchange set may be named CATALOG. The contents of the exchange catalogue are described in Clause 12.???

11.6 Data integrity (S-57 PS 5.9)

11.6.1 ENC data integrity measures

Where there is a high impact on the integrity of data as a result of data corruption, such as to ENC data, there is a need for a mechanism within the ENC data itself to ensure it has not changed during transmission/delivery. The mechanism chosen for this assurance is a Cyclic Redundancy Check (CRC). File integrity checks are based on the CRC-32 algorithm (a 32 bit Cyclic Redundancy Check algorithm) as defined in ANSI/IEEE Standard 802.3, the reference for which is given in clause 1.2.

11.6.2 Processing

Encoding is defined by the following generating polynomial:

$$G(x) = x^{32} + x^{26} + x^{23} + x^{22} + x^{16} + x^{12} + x^{11} + x^{10} + x^8 + x^7 + x^5 + x^4 + x^2 + x + 1$$

Processing is applied to relevant files as they appear in the exchange set.

S-101

January 2010

Comment [JLP7]: WILL BE DISCUSSED VIA TSMAD PAPER

The CRC value of the file is defined by the following process: 1. The first 32 bits of the data are complemented.

- The n bits of the data are complemented.
 The n bits of the data are then considered to be the coefficients of a polynomial M(x) of degree n-1.
 M(x) is multiplied by x³² and divided by G(x), producing a remainder R(x) of degree <31.
 The coefficients of R(x) are considered to be a 32-bit sequence.

- 5. The bit sequence is complemented and the result is the CRC.

The hexadecimal format of CRCs are converted to ASCII characters and stored in the "Catalogue Directory" [CATD] field.

An example of coding in C language is given in Annex.

35

12 Metadata

12.1 Introduction

This clause defines the mandatory and optional metadata needed for S-101. In some cases the metadata may also support national language. If this is the case it is noted in the Remarks column.

36

12.1.1 Exchange Set Metadata

Name	Multiplity	Value	Туре	Remarks	
S100_ExchangeSet	-		-	Aggregation of the elements comprising an exchange	
				set for the transfer of data.	
aggregateFile	0*		-	Collection of support files in the exchange set	
partOf	0*		-	Collection of datasets which are part of the exchange	
				set	
aggregateCatalogue	0*		-	Collection of catalogues	
superset				The master container exchange set which can contain	
				a subSet of exchange sets	
subset				Exchange set which is part of the superSet	

Comment [JLP8]: Colour Coding:

Green = Mandatory in S-100 and in S-101 Blue = In S-100 elements of an exchange set and needs discussion on whether it belongs in the main S-100 metadata Red = no S-100 or ISO 19115 equivalent Orange = called from ISO 19115

Comment [JLP9]: WILL BE DISCUSSED VIA TSMAD PAPER

Comment [JLP10]: S-100 has a spelling error

	12.1.2	Dataset	Metadata
--	--------	---------	----------

Name	Multiplity	Value	Туре	Remarks		
S101_DataSetDiscoveryMetadata	-		-	-		
metadataFileIdentifier	1		CharacterString			
metadataPointOfContact	1		CI_ResponsibleParty			
metadataDateStamp	1		Date			
metadataLanguage		English	CharacterString	All data sets conforming to S-101 PS must use English language		
fileName	1		CharacterString	Dataset file name		Comment [JLP11]: Use title or new element.
filePath	1		CharacterString	Full path from the exchange set root directory		Note these are in the S-100 Catalogue file metadata but not in the main part.
						Comment [JLP12]: New element needed,
description	1		CharacterString	Short description of the area covered by dataset		however this is an exchange set related info i.e can be different for different exchange sets
				harbour or port name, between two named locations etc.		Note these are in the S-100 Catalogue file
				NATIONAL LANGUAGE enabled		metadata but not in the main part.
dataProtection	1	{1} to {2}	CharacterString	1. Encrypted		Comment [JLP13]: Alternative title or new element?
				2. Unencrypted		
classification	1	{1} to {5}	Class	1. unclassified	\backslash	Note these are in the S-100 Catalogue file metadata but not in the main part.
			MD SecurityConstraints>MD ClassificationCode	2. restricted		
			(codelist)	3. confidential		Comment [JLP14]: New
				4. secret 5. top secret		
purpose	1	{1} to {5}	CharacterString	1. New Dataset		
				2. New Edition		
				3. Update		

S-101

Name	Multiplity	Value	Туре	Remarks
			MD_Identification>purpose (character string)	4. Re-issue
				5.Cancellation
specificUsage	1	{1} to {3}	CharacterString	1. Port Entry – A dataset containing data required: For navigating the approaches to ports
			MD_USAGE>specificUsage (character string)	 for navigating within ports, harbours, bays, rivers and canals, for anchorages
				as an aid to berthing
			MD_USAGE>userContactInfo (CI_ResponsibleParty)	or any combination of the above.
				2.Transit – A dataset containing data required for : • navigating along the coastline either inshore
				or offshore
				navigating oceans, approaching coastsroute planning
				or any combination of the above.
				3.Overview – A dataset containing data required:
				for Ocean Crossing
				route planning
editionNumber	1		Integer	When a data set is initially created, the edition number
				1 is assigned to it. The edition number is increased by 1 at each new edition. Edition number remains the same
				for re-issue.
undete Number	1		CharacterString	
updateNumber	1		CharacterString	Update number 0 is assigned to a new data set.
issueDate	1		Date	Date on which the data was made available by the data producer.
productSpecification	1	S-101 version 0.0.1	S-100_	This must be encoded as S-101
			ProductSpecification	
producingAgency	1		CI_ResponsibleParty	Agency responsible for producing the data.

Name	Multiplity	Value	Туре	Remarks
optimumDisplayScale	1	{1} to {13}	double	1: <4,000 2: 4,000 3: 8,000 4: 12,000 5: 22,000 6: 45,000 7: 90,000 8: 180,000 9: 350,000 10: 700,000 11: 1,500,000 12: 3,000,000 13: 3,000,000
maximumDisplayScale	1	(1) to (13)	Double	1: <4,000 2: 4,000 3: 8,000 4: 12,000 5: 22,000 6: 45,000 7: 90,000 8: 180,000 9: 350,000 10: 700,000 11: 1,500,000 12: 3,000,000
minimumDisplayScale	1	{1} to {13}	Double	13: >3,000,000 1: <4,000
norizontalDatum	1	WGS84	CharacterString	EPSG:4326
verticalDatum	1	{1} to {30}	Double	1 : Mean low water springs 2 : Mean lower low water springs 3 : Mean sea level

Comment [JLP16]: dataset scale can possibly be handled by equivalentScale but likely new elements are needed to properly handle optimumDisplayScale and Min and Max scales

S-101

January 2010

Name	Multiplity	Value	Туре	Remarks
				 4 : Lowest low water 5 : Mean low water 5 : Mean low water springs 7 : Approximate mean low water springs 8 : Indian spring low water 9 : Low water springs 10 : Approximate lowest astronomical tide 11 : Nearly lowest low water 12 : Mean lower low water 13 : Low water 14 : Approximate mean low water 15 : Approximate mean low water 16 : Mean high water 17 : Mean high water 17 : Mean high water springs 18 : High water 19 : Approximate mean sea level 20 : High water springs 21 : Mean high water springs 22 : Equinoctial spring low water 23 : Lowest astronomical tide 24 : Local datum 25 : International Great Lakes Datum 1985 26 : Mean water large tide 29 : Nearly highest high water 30 : Highest astronomical tide (HAT)
soundingDatum	1	{1} to {30}	Double	

S-101

Name	Multiplity	Value	Туре	Remarks		
				19 : Approximate mean sea level 20 : High water springs 21 : Mean higher high water 22 : Equinoctial spring low water 23 : Lowest astronomical tide 24 : Local datum 25 : International Great Lakes Datum 1985 26 : Mean water level 27 : Lower low water large tide 28 : Higher high water large tide 29 : Nearly high est high water 30 : Highest astronomical tide (HAT)		Comment [JLP17]: Thes
dataType	1	ISO 8211 BINARY	S-100_DataFormat			100 under exchange set (w SORDAT and VERDAT for
otherDataTypeDescription	01		CharacterString		Ι	question is since this is locator for exchange catalogues -
boundingBox	1		EX_GeographicBoundingBox			exposed at higher level in S
boundingPolygon	1*		EX_BoundingPolygon			question is do we need to a 100 instead of referencing
comment	01		CharacterString	Any additional Information NATIONAL LANGUAGE enabled		VERDAT.
cyclicRedundancyCheck	1		CharacterString NonNegativeInteger		/ /	to Sounding Datum – the fie exchange catalogue
layerld	1*	{1} to {3}	integer	Identifies the relationship to other layers that are required to view the complete data set. 1. Scale Independent		Comment [JLP19]: This is to Sounding Datum – the fie exchange catalogue
				 Scale Dependent Complete 		Comment [JLP20]: This i to Sounding Datum – the fie exchange catalogue

12.1.3 Support File Metadata

Name	Multiplicity	Value	Туре	Remarks
S101_SupportFileDiscoveryMetadata	-		-	-

t (which points to for the values). The located in the metadata - does it need to be S-100. The second add the codelist to S-g SORDAT and s is a similar situation field is in the S100

is is a similar situation

field is in the S100

is is a similar situation field is in the S100 exchange catalogue

Comment [JLP21]: This is a similar situation to Sounding Datum – the field is in the S100 exchange catalogue

Comment [JLP22]: This will also need to be added to S-100 once TSMAD makes a decision

L		1			-	
Name	Multiplicity	Value	Туре	Remarks		
fileName	1		CharacterString			
filePath	1		CharacterString			Comment [JLP23]: New element needed,
Purpose	1	{1} to {3}	class S-100_SupportFilePurpose	 New – A file which is new Replacement – A file which replaces an existing file Deletion – deletes an existing file 		however this is an exchange set related info i.e can be different for different exchange sets Note these are in the S-100 Catalogue file metadata but not in the main part.
editionNumber	1		CharacterString	When a data set is initially created, the edition number 1 is assigned to it. The edition number is increased by 1 at each new edition. Edition number remains the same for a re-issue.		
issueDate	1		Date	Date on which the data was made available by the data producer.		
productSpecification	1		S-100_ProductSpecification	Version of S-101		
dataType	1	{1} to {4}	class S-100_SupportFileFormat	 TXT =Text files XML = Text files HTM = Text files TIFF = Picture files 		
dataTypeVersion	1		CharacterString	The version number of the dataType		Comment [JLP24]: Multiplicity is missing in S-
Comment	01		CharacterString	Any additional Information NATIONAL LANGUAGE enabled		100
Crc	1		CharacterString			Comment [JLP25]: S-100 is inconsistent in
S-101	-		-	-		naming. CRC here and CyclicRedundancyCheck in the dataset.
SupportFileDiscoveryMetadata						<u></u>
fileName	1		CharacterString			

S-101

12.1.4 Exchange Catalogue File Metadata

The catalogue file is defined in XML schema language and the data set files are encoded as ISO/IEC 8211 data records, fields, and subfields. The Exchange catalogue inherits the dataset discovery metadata and support file discovery metadata.

Name	Multiplicity	Value	Туре	Remarks	
S101_ExchangeCatalogue	-			An exchange catalogue contains the discovery metadata about the exchange datasets and support files	
identifier	1		CharacterString S-100_Catalogueldentifier	Uniquely identifies this exchange catalogue	
editionNumber	1		CharacterString	The edition number of this exchange catalogue	
contact	1		S-100_CataloguePointofContact CI_ResponsibleParty		
date	1		Date	Creation date of the exchange catalogue	
Metadata <mark>language</mark>	1	English	CharacterString	All data sets conforming to S-101 PS must use English language	 Comment [JLP26]: Shouldn't this be at the
name	1	CATALOG.101	CharacterString	Catalogue filename	 dataset level? Comment [JLP27]: It is located under the S- 100 dataset and not at the S-100 catalogue
description	1		CharacterString	Description of what the exchange catalogue contains NATIONAL LANGUAGE enabled	Too dataset and not at the S-Too catalogue
productSpecification	1			S-101 Version Number	Comment [JLP28]: We identify the Product
comment	01		CharacterString	Any additional Information NATIONAL LANGUAGE enabled	Specification at the dataset level. What if the catalogue contains data that is from two different versions of S-101. I would think it does not belong here.
compressionFlag	1	{1} to {2}	CharacterString	1. Yes 2. No	Comment [JLP29]: Everything below needs review by DPSWG.

Name	Multiplicity	Value	Туре	Remarks
algorithmMethod	1	{1} to {2}	CharacterString	1. ZIP 2. RAR
sourceMedia	1			
replacedData	1			If a data file is cancelled is it replaced by another data file
dataReplacement	01			Cell name

12.2 Language (S-57 PS 3.11)

The exchange language must be English. Other languages may be used as a supplementary option. In general, this means that when a national language is used in the textual national attributes the English translation must also exist in the textual international attributes. National geographic names can be left in their original national language in the international attributes, or transliterated or transcribed and used in the international attributes.

Character strings must be encoded using the character set defined in ISO 10646-1, in Unicode Transformation Format-8 (UTF-8).

44

ANNEX A

Data Product format (encoding) (S-57 PS 6)

A1 Introduction

A1.1 Data set files

The order of data in each base or update cell file is described below:

Data set file Data set general information record Data set structure information field structure Data set Coordinate Reference System record structure Information records Information Vector records Point Multi point Curve Composite Curve Surface Feature records Meta features Geo features Aggregated features Theme features

This order of records will enable the import software to check that the child record exists each time the parent record references it (i.e. it will already have read the child record so it will know if it exists or not).

A1.2 Records

Records and fields that do not appear in the following tree structure diagrams are prohibited. The order of records in the files must be the same as that described in these tree structure diagrams.

The combination of the file name and the "Name" of the record must provide a unique world-wide identifier of the record.

A1.3 Fields

For base cell files, some fields may be repeated (indicated by $<0..^{>}$ or $<1..^{>}$) and all of their content may be repeated (indicated by *). In order to reduce the volume of data, the encoder should repeat the sequence of subfields, in preference to creating several fields.

A1.4 Subfields

Mandatory subfields must be filled by a non-null value.

Prohibited subfields must be encoded as missing subfields values. The exact meaning of missing attribute values is defined in clause ???

Comment [j31]: At present, it is intended that this go in the DCCG, therefore this reference should be to Appendix A.

S-101

January 2010

Comment [JLP30]: Annexes will get reordered According to TSMAD 22 In the tables following the tree structure diagrams, prescribed values are indicated in the "values" column. The "comment" column contains general comments and an indication of whether the subfield is ASCII or binary coded.

When encoding new base data sets the record update instruction (RUIN) is always set to insert. When encoding updates it can be set to insert, modify or delete.

A1.5 Base cell structure

S-101

```
Base dataset file
    --<1>- Data Set General Information record
       --<1>-DSID (11): Data Set Identification field
       --<1>-DSSI (13): Data Set Structure Information field
       --<0..*>-ATTR (*5): Attribute field (Metadata)
   --<1>--Data Set Coordinate Reference System record
        --<1>-CRID (3): Coordinate Reference System Record Identifier field
       |--<1..*>-CRSH (7): Coordinate Reference System Header field
          |--<0..1>-CSAX (*2): Coordinate System Axes field
          --<0..1>-VDAT (4): Vertical Datum field
    --<0..*>--Information record
       --<1>-IRID (5): Information Type Record Identifier field
          --<0..*>- ATTR (*5): Attribute field
          |--<0..*>- INAS (*4): Information Association field
    --<0..*>-- Point record
       --<1>-PRID (4): Point Record Identifier field
          |-<0..*>-INAS (*4): Information Association field
          alternate coordinate representations
          *-<1>-C2DI (2): 2-D Integer Coordinate field
          *-<1>-C3DI (4): 3-D Integer Coordinate field
    --<0..*>-- Multi Point record
       --<1>-MRID (4): Multi Point Record Identifier field
```

|-<0..*>-INAS (*4): Information Association field | alternate coordinate representations *-<0..*>-C2DI (*2): 2-D Integer Coordinate field *-<0..*>-C3DI (*4): 3-D Integer Coordinate field --<0..*>-- Curve record --<1>-CRID (4): Curve Record Identifier field |-<0..*>-INAS (*4): Information Association field -<1>-PTAS (*3): Point Association field -<1>-SEGH (1): Segment Header field -<1..*>-C2DI (*2): 2-D Integer Coordinate field --<0..*>-- Composite Curve record --<1>-CCID (4): Composite Curve Record Identifier field -<0..*>-INAS (*4): Information Association field -<0..*>-CUCO (*3): Curve Component field --<0..*>-- Surface record --<1>-SRID (4): Surface Record Identifier field -<0..*>-INAS (*4): Information Association field -<1..*>-RIAS (*5): Ring Association Field --<0..*>-- Feature Type record --<1>-FRID (5): Feature Type Record Identifier field -<1>-FOID (3): Feature Object Identifier field -<0..*>-ATTR (*5): Attribute field -<0..*>-INAS (*4): Information Association field -<0..*>-SPAS (*6): Spatial Association field -<0..*>-FEAS (*5): Feature Association field -<0..*>-THAS (*3): Theme Association field -<0..*>-MASK (*4): Masked Spatial Type field

S-101

January 2010

Subfield name	Label	Value	Format	Comment	
Record name	RCNM	{10}	b11	{10} - Data Set Identification	
Record identification number	RCID	{1}	b14	Only one record	
Encoding specification	ENSP	'S-100 Part 10a'	A()	Encoding specification that defines the encoding	
Encoding specification edition	ENED	"1.1"	A()	Edition of the encoding specification	
Product identifier	PRSP	"INT.IHO.S-101.1.0"	A()	Unique identifier for the data product as specified in the product specification	
Product edition	PRED	"1.0"	A()	Edition of the product specification	
Application profile	PROF	{1}	A()	{1} – EN Profile	
Dataset file identifier	DSNM		A()	The file name including the extension but excluding any path information	
Dataset title	DSTL		A()	The title of the dataset	
Dataset reference date	DSRD		A(8)	The reference date of the dataset Format: YYYYMMDD according to ISO 8601	
Dataset language	DSLG	"EN"	A()	The (primary) language used in this dataset	
Dataset abstract	DSAB	omitted	A()	The abstract of the dataset	
Dataset edition	DSED		A()	See clause ??	
Dataset topic category	*DSTC	{14}{18}	b11	A set of topic categories	

Field Content A1.5.1 Data Set Identification field - DSID

A1.5.2 Data Set Structure Information field - DSSI

Subfield name	Label	Value	Format	Comment
Dataset Coordinate Origin X	DCOX	{0.0}	b48	Shift used to adjust x-coordinate before encoding
Dataset Coordinate Origin Y	DCOY	{0.0}	b48	Shift used to adjust y-coordinate before encoding
Dataset Coordinate Origin Z	DCOZ	{0.0}	b48	Shift used to adjust z-coordinate before encoding
Coordinate multiplication factor for x- coordinate	CMFX	{10 ⁷ }	b14	Floating point to integer multiplication factor for the x-coordinate or longitude
Coordinate multiplication factor for y- coordinate	CMFY	{10 ⁷ }	b14	Floating point to integer multiplication factor for the y-coordinate or latitude
Coordinate multiplication factor for z- coordinate	CMFZ	{100}	b14	Floating point to integer multiplication factor for the z-coordinate or depths or height
Number of Information Type records	NOIR		b14	Number of information records in the data set
Number of Point records	NOPN		b14	Number of point records in the data set
Number of Multi Point records	NOMN		b14	Number of multi point records in the data set
Number of Curve records	NOCN		b14	Number of curve records in the data set
Number of Composite Curve records	NOXN		b14	Number of composite curve records in the data set

S-101

January 2010

Number of Surface records	NOSN	b14	Number of surface records in the data set
Number of Feature Type records	NOFR	b14	Number of feature records in the data set

A1.5.3 Attribute field - ATTR

Subfield name	Label	Value	Format	Comment
Attribute label/code	*ATLB		b12	A valid attribute code
Attribute index	ATIX		b12	Index (position) of the attribute in the sequence of attributes with the same code and the same parent (starting with 1).
Parent index	PAIX		b12	Index (position) of the parent complex attribute within this ATTR field (starting with 1). If the attribute has no parent (top level attribute) the value is 0.
Attribute Instruction	ATIN	{1}	b11	{1} - Insert
Attribute value	ATVL		A()	A string containing a valid value for the domain of the attribute specified by the subfields above.

A1.5.3.1 Information Association field

Field Tag: INAS Field Name: Information Association

Subfield name	Label	Value	Format	Subfield content and specification
Referenced Record name	RRNM	150	b11	Record name of the referenced record
Referenced Record identifier	RRID		b14	Record identifier of the referenced record
Information Association	IASS		b12	A valid code for the information association
Role	ROLE		b12	A valid code for the role
Information Association Update Instruction	IUIN		b11	 {1} - Insert {2} - Delete {3} - Modify
Attribute label/code	*ATLB		b12	A valid attribute code
Attribute index	ATIX		b12	Index (position) of the attribute in the sequence of attributes with the same code and the same parent (starting with 1).
Parent index	PAIX		b12	Index (position) of the parent complex attribute within this ATTR field (starting with 1). If the attribute has no parent (top level attribute) the value is 0.
Attribute Instruction	ATIN		b11	{1} - Insert {2} - Delete {3} - Modify
Attribute value	ATVL		A()	A string containing a valid value for the domain of the attribute specified by the subfields above.

A1.5.3.2 Coordinate Reference System Record Identifier field - CRID

Subfield name	Label	Value	Format	Comment
Record name	RCNM	{15}	b11	{15} - Coordinate Reference System Identifier
Record identification number	RCID	{1}	b14	Only one record
Number of CRS Components	NCRC		b11	{1} - Single CRS

S-101

		>{1} - Compound CRS

A1.5.3.3 Coordinate Reference System Header field - CRSH

Subfield name	Label	Value	Format	Comment
CRS index	CRIX			1 – for the horizontal CRS >1 – for the vertical CRS's
CRS Type	CRST	{1} or {5}	b11	{1} – 2D Geographic {5} - Vertical
Coordinate System Type	CSTY	{1} or {3}	b11	{1} - Ellipsoidal CS{3} - Vertical CS
CRS Name	CRNM	"WGS84" for horizontal CRS "Depth - *" for vertical CRS where * is the name of the vertical datum	A()	
CRS Identifier	CRSI	"4326" – for horizontal CRS "omitted for vertical CRS	A()	
CRS Source	CRSS	{3} for horizontal CRS {255} for vertical CRS	b11	{3} - EPSG {255} - Not Applicable
CRS Source Information	SCRI	omitted	A()	

A1.5.3.4 Coordinate System Axes field - CSAX

This field is only used for vertical CRS.

Subfield name	Label	Value	Format	Comment
Axis Type	*AXTY	{12}	b11	{12} – Gravity related depth (orientation down)
Axis Unit of Measure	AXUM	{4}	b11	{4} - Metre

A1.5.3.5 Vertical Datum field – VDAT

This field is only used for vertical CRS.

Subfield name	Label	Value	Format	Comment
Datum Name	DTNM		A()	Name of the enumeration value of the attribute VERDAT
Datum Identifier	DTID		A()	Enumeration value of the attribute VERDAT
Datum Source	DTSR	{2}	b11	{2} - Feature Catalogue
Datum Source Information	SCRI	omitted	A()	

A1.5.4 Information Type Identifier field - IRID

Subfield name	Label	Value	Format	Comment
Record name	RCNM	{150}	b11	{150} - Information Type
Record identification number	RCID		b14	Range: 1 to 2 ³² -2
Object code	OBJC		b12	A valid information type code from the FC
Record version	RVER		b12	RVER contains the serial number of the record edition
Record update instruction	RUIN	{1}	b11	{1} - Insert

A1.5.5 2-D Integer Coordinate field – C2DI

Subfield name	Label	Value	Format	Comment
Coordinate in Y axis	*YC00		b24	Y-coordinate or latitude
Coordinate in X axis	XCOO		b24	X-coordinate or longitude

A1.5.6 3-D Integer Coordinate field- C3DI

Subfield name	Label	Value	Format	Comment
Vertical CRS Id	VCID		b11	Internal identifier of the Vertical CRS
Coordinate in Y axis	*YC00		b24	Y- coordinate or latitude
Coordinate in X axis	XCOO		b24	X- coordinate or longitude
Coordinate in Z axis	ZCOO		b24	Z - coordinate (depth)

A1.5.6.1 Point Record Identifier field - PRID

Subfield name	Label	Value	Format	Comment
Record name	RCNM	{110}	b11	{110} - Point
Record identification number	RCID		b14	Range: 1 to 2 ³² -2
Record version	RVER		b12	RVER contains the serial number of the record edition
Record update instruction	RUIN	{1}	b11	{1} – Insert

A1.5.6.2 Multi Point Record Identifier field - MRID

Subfield name	Label	Value	Format	Comment
Record name	RCNM	{115}	b11	{115} - Multi Point
Record identification number	RCID		b14	Range: 1 to 2 ³² -2
Record version	RVER		b12	RVER contains the serial number of the record edition
Record update instruction	RUIN	{1}	b11	{1} - Insert

A1.5.6.3 Curve Record Identifier field - CRID

Subfield name	Label	Value	Format	Comment
Record name	RCNM	{120}	b11	{120} - Curve
Record identification number	RCID		b14	Range: 1 to 2 ³² -2
Record version	RVER		b12	RVER contains the serial number of the record edition
Record update instruction	RUIN	{1}	b11	{1} - Insert

A1.5.6.4 Point Association field - PTAS

Subfield name	Label	Value	Format	Comment
Referenced Record name	*RRNM		b11	Record name of the referenced record
Referenced Record identifier	RRID		b14	Record identifier of the referenced record
Topology indicator	ΤΟΡΙ		b11	 {1} - Beginning point {2} - End point {3} - Beginning & End point

A1.5.6.5 Segment Header field - SEGH

	Subfield name	Label	Value	Format	Comment
--	---------------	-------	-------	--------	---------

S-101

Interpolation INTP {4} b11 {4} - Loxodromic	Interpolation	INTP	{4}	b11	{4} - Loxodromic
---	---------------	------	-----	-----	------------------

A1.5.6.6 Composite Curve Record Identifier field - CCID

Subfield name	Label	Value	Format	Comment
Record name	RCNM	{125}	b11	{125} - Composite Curve
Record identification number	RCID		b14	Range: 1 to 2 ³² -2
Record version	RVER		b12	RVER contains the serial number of the record edition
Record update instruction	RUIN	{1}	b11	{1} - Insert

A1.5.6.7 Curve Component field - CUCO

Subfield name	Label	Value	Format	Comment
Referenced Record name	*RRNM		b11	Record name of the referenced record
Referenced Record identifier	RRID		b14	Record identifier of the referenced record
Orientation	ORNT		b11	{1} - Forward
				{2} - Reverse

A1.5.6.8 Surface Record Identifier field - SRID

Subfield name	Label	Value	Format	Comment
Record name	RCNM	{130}	b11	{130} - Surface
Record identification number	RCID		b14	Range: 1 to 2 ³² -2
Record version	RVER		b12	RVER contains the serial number of the record edition
Record update instruction	RUIN	{1}	b11	{1} – Insert

A1.5.6.9 Ring Association field - RIAS

Subfield name	Label	Value	Format	Comment
Referenced Record name	*RRNM		b11	Record name of the referenced record
Referenced Record identifier	RRID		b14	Record identifier of the referenced record
Orientation	ORNT		b11	{1} - Forward {2} - Reverse
Usage indicator	USAG		b11	{1} - Exterior {2} - Interior
Ring Association update instruction	RAUI	{1}	b11	{1} – Insert

A1.5.7 Feature Type Record Identifier field - FRID

Subfield name	Label	Value	Format	Comment
Record name	RCNM	{100}	b11	{100} - Feature type
Record identification number	RCID		b14	Range: 1 to 2 ³² -2
Object code	OBJC		b12	A valid feature type code from the FC
Record version	RVER		b12	RVER contains the serial number of the record edition
Record update instruction	RUIN	{1}	b11	{1} - Insert

A1.5.8 Feature Object Identifier field - FOID

Subfield name	Label	Value	Format	Comment
Producing agency	AGEN		b12	Agency code

S-101

Feature identification number	FIDN	b14	Range: 1 to 2 ³² -2
Feature identification subdivision	FIDS	b12	Range: 1 to 2 ¹⁶ -2

A1.5.9 Spatial Association field - SPAS

Subfield name	Label	Value	Format	Comment
Referenced Record name	*RRNM		b11	Record name of the referenced record
Referenced Record identifier	RRID		b14	Record identifier of the referenced record
Orientation	ORNT		b11	{1} Forward {2} Reverse {255} NULL (Not Applicable)
Scale Minimum	SMIN		b14	Denominator of the largest scale for which the feature type can be depicted by the referenced spatial object. If the value is 0 it does not apply.
Scale Maximum	SMAX		b14	Denominator of the smallest scale for which the feature type can be depicted by the referenced spatial object. If the value is 2^{32} -1 it does not apply.
Spatial Association Update Instruction	SAUI	{1}	b11	{1} - Insert

A1.5.10 Feature Association – FEAS

Subfield name	Label	Value	Format	Comment
Referenced Record name	*RRNM		b11	Record name of the referenced record
Referenced Record identifier	RRID		b14	Record identifier of the referenced record
Association Code	ASCD		b12	A valid code for the association
Role Code	RLCD		b12	A valid code for the role
Feature Association Update Instruction	FAUI	{1}	b11	{1} - Insert

A1.5.11 Theme Association field - THAS

Subfield name	Label	Value	Format	Comment
Referenced Record name	*RRNM		b11	Record name of the referenced record
Referenced Record identifier	RRID		b14	Record identifier of the referenced record
Theme Association Update Instruction	TAUI	{1}	b11	{1} - Insert

S-101

A1.5.12 Masked Spatial Type field - MASK

Subfield name	Label	Value	Format	Comment
Referenced Record name	*RRNM		b11	Record name of the referenced record
Referenced Record identifier	RRID		b14	Record identifier of the referenced record
Mask Update Instruction	MUIN	{1}	b11	{1} - Insert

A1.6 Update dataset structure

```
Update dataset file
    --<1>- Data Set General Information record
       --<1>-DSID (11): Data Set Identification field
       --<1>-DSSI (13): Data Set Structure Information field
       --<0..*>-ATTR (*5): Attribute field (Metadata)
    --<0..*>--Information record
       --<1>-IRID (5): Information Type Record Identifier field
          --<0..*>- ATTR (*5): Attribute field
          --<0..*>- INAS (*4): Information Association field
    --<0..*>-- Point record
       --<1>-PRID (4): Point Record Identifier field
          -<0..*>-INAS (*4): Information Association field
           alternate coordinate representations
          *-<1>-C2DI (2): 2-D Integer Coordinate field
          *-<1>-C3DI (4): 3-D Integer Coordinate field
    --<0..*>-- Multi Point record
       --<1>-MRID (4): Multi Point Record Identifier field
          -<0..*>-INAS (*4): Information Association field
          |-<0..1>-COCC (3): Coordinate Control field
           alternate coordinate representations
          *-<0..*>-C2DI (*2): 2-D Integer Coordinate field
          *-<0..*>-C3DI (*4): 3-D Integer Coordinate field
```

S-101

--<0..*>-- Curve record --<1>-CRID (4): Curve Record Identifier field -<0..*>-INAS (*4): Information Association field -<1>-PTAS (*3): Point Association field -<0..1>-SECC (3): Segment Control field -<1>-SEGH (1): Segment Header field -<0..1>-COCC (3): Coordinate Control Field |-<1..*>-C2DI (*2): 2-D Integer Coordinate field --<0..*>-- Composite Curve record --<1>-CCID (4): Composite Curve Record Identifier field -<0..*>-INAS (*4): Information Association field -<0..1>-CCOC (3): Curve Component Control field -<0..*>-CUCO (*3): Curve Component field --<0..*>-- Surface record --<1>-SRID (4): Surface Record Identifier field -<0..*>-INAS (*4): Information Association field |-<1..*>-RIAS (*5): Ring Association Field --<0..*>-- Feature Type record --<1>-FRID (5): Feature Type Record Identifier field -<1>-FOID (3): Feature Object Identifier field -<0..*>-ATTR (*5): Attribute field -<0..*>-INAS (*4): Information Association field -<0..*>-SPAS (*6): Spatial Association field -<0..*>-FEAS (*5): Feature Association field -<0..*>-THAS (*3): Theme Association field -<0..*>-MASK (*4): Masked Spatial Type field

S-101

January 2010

Field Content
A1.6.1 Data Set Identification field - DSID

Subfield name	Label	Value	Format	Comment
Record name	RCNM	{10}	b11	{10} - Data Set Identification
Record identification number	RCID	{1}	b14	Only one record
Encoding specification	ENSP	'S-100 Part 10a'	A()	Encoding specification that defines the encoding
Encoding specification edition	ENED	"1.1"	A()	Edition of the encoding specification
Product identifier	PRSP	"INT.IHO.S-101.1.0"	A()	Unique identifier for the data product as specified in the product specification
Product edition	PRED	"1.0"	A()	Edition of the product specification
Application profile	PROF	{2}	A()	{1} – ER Profile
Dataset file identifier	DSNM		A()	The file name including the extension but excluding any path information
Dataset title	DSTL		A()	The title of the dataset
Dataset reference date	DSRD		A(8)	The reference date of the dataset Format: YYYYMMDD according to ISO 8601
Dataset language	DSLG	"EN"	A()	The (primary) language used in this dataset
Dataset abstract	DSAB	omitted	A()	The abstract of the dataset
Dataset edition	DSED		A()	See clause ??
Dataset topic category	*DSTC	{14}{18}	b11	A set of topic categories

A1.6.2 Data Set Structure Information field - DSSI

Subfield name	Label	Value	Format	Comment
Dataset Coordinate Origin X	DCOX	{0.0}	b48	Shift used to adjust x-coordinate before encoding
Dataset Coordinate Origin Y	DCOY	{0.0}	b48	Shift used to adjust y-coordinate before encoding
Dataset Coordinate Origin Z	DCOZ	{0.0}	b48	Shift used to adjust z-coordinate before encoding
Coordinate multiplication factor for x- coordinate	CMFX	{10 ⁷ }	b14	Floating point to integer multiplication factor for the x-coordinate or longitude
Coordinate multiplication factor for y- coordinate	CMFY	{10 ⁷ }	b14	Floating point to integer multiplication factor for the y-coordinate or latitude
Coordinate multiplication factor for z- coordinate	CMFZ	{100}	b14	Floating point to integer multiplication factor for the z-coordinate or depths or height
Number of Information Type records	NOIR		b14	Number of information records in the data set
Number of Point records	NOPN		b14	Number of point records in the data set
Number of Multi Point records	NOMN		b14	Number of multi point records in the data set
Number of Curve records	NOCN		b14	Number of curve records in the data set
Number of Composite Curve records	NOXN		b14	Number of composite curve records in the data set
Number of Surface records	NOSN		b14	Number of surface records in the data set

S-101

January 2010

Number of Feature Type records	NOFR		b14	Number of feature records in the data set
--------------------------------	------	--	-----	---

A1.6.3 Attribute field - ATTR

Subfield name	Label	Value	Format	Comment
Attribute label/code	*ATLB		b12	A valid attribute code
Attribute index	ATIX		b12	Index (position) of the attribute in the sequence of attributes with the same code and the same parent (starting with 1).
Parent index	PAIX		b12	Index (position) of the parent complex attribute within this ATTR field (starting with 1). If the attribute has no parent (top level attribute) the value is 0.
Attribute Instruction	ATIN	{1}, {2} or {3}	b11	 {1} - Insert {2} - Delete {3} - Modify
Attribute value	ATVL		A()	A string containing a valid value for the domain of the attribute specified by the subfields above.

A1.6.4 Information Association field

Field Tag: INAS Field Name: Information Association

Subfield name	Label	Value	Format	Subfield content and specification
Referenced Record name	RRNM		b11	Record name of the referenced record
Referenced Record identifier	RRID		b14	Record identifier of the referenced record
Information Association	IASS		b12	A valid code for the information association
Role	ROLE		b12	A valid code for the role
Information Association Update Instruction	IUIN		b11	 {1} - Insert {2} - Delete {3} - Modify
Attribute label/code	*ATLB		b12	A valid attribute code
Attribute index	ATIX		b12	Index (position) of the attribute in the sequence of attributes with the same code and the same parent (starting with 1).
Parent index	PAIX		b12	Index (position) of the parent complex attribute within this ATTR field (starting with 1). If the attribute has no parent (top level attribute) the value is 0.
Attribute Instruction	ATIN		b11	 {1} - Insert {2} - Delete {3} - Modify
Attribute value	ATVL		A()	A string containing a valid value for the domain of the attribute specified by the subfields above.

A1.6.5 Information Type Identifier field - IRID

Subfield name	Label	Value	Format	Comment
Record name	RCNM	{150}	b11	{150} - Information Type
Record identification number	RCID		b14	Range: 1 to 2 ³² -2
Object code	OBJC		b12	A valid information type code from the FC
Record version	RVER		b12	RVER contains the serial number of the record edition
Record update instruction	RUIN	{1},{2} or {3}	b11	{1} - Insert {2} - Delete {3} - Modify

S-101

A1.6.6 2-D Integer Coordinate field – C2DI

Subfield name	Label	Value	Format	Comment
Coordinate in Y axis	*YCOO		b24	Y-coordinate or latitude
Coordinate in X axis	XCOO		b24	X-coordinate or longitude

A1.6.7 3-D Integer Coordinate field- C3DI

Subfield name	Label	Value	Format	Comment
Vertical CRS Id	VCID		b11	Internal identifier of the Vertical CRS
Coordinate in Y axis	*YC00		b24	Y- coordinate or latitude
Coordinate in X axis	XCOO		b24	X- coordinate or longitude
Coordinate in Z axis	ZCOO		b24	Z - coordinate (depth)

A1.6.7.1 Point Record Identifier field - PRID

Subfield name	Label	Value	Format	Comment
Record name	RCNM	{110}	b11	{110} - Point
Record identification number	RCID		b14	Range: 1 to 2 ³² -2
Record version	RVER		b12	RVER contains the serial number of the record edition
Record update instruction	RUIN	{1},{2} or {3}	b11	{1} - Insert {2} - Delete
				{3} - Modify

A1.6.7.2 Multi Point Record Identifier field - MRID

Subfield name	Label	Value	Format	Comment
Record name	RCNM	{115}	b11	{115} - Multi Point
Record identification number	RCID		b14	Range: 1 to 2 ³² -2
Record version	RVER		b12	RVER contains the serial number of the record edition
Record update instruction	RUIN	{1},{2} or {3}	b11	{1} – Insert {2} - Delete
				{3} - Modify

A1.6.7.3 Coordinate Control field - COCC

Subfield name	Label	Value	Format	Comment
Coordinate Update Instruction	COUI	{1},{2} or {3}	b11	 {1} - Insert {2} - Delete {3} - Modify
Coordinate Index	COIX		b12	Index (position) of the addressed coordinate tuple within the coordinate field(s) of the target record
Number of Coordinates	NCOR		b12	Number of coordinate tuples in the coordinate field(s) of the update record

A1.6.7.4 Curve Record Identifier field - CRID

Subfield name	Label	Value	Format	Comment
Record name	RCNM	{120}	b11	{120} - Curve
Record identification number	RCID		b14	Range: 1 to 2 ³² -2
Record version	RVER		b12	RVER contains the serial number of the record edition
Record update instruction	RUIN	{1},{2} or	b11	{1} - Insert

S-101

{3}	{2} - Delete {3} - Modify
-----	------------------------------

A1.6.7.5 Point Association field - PTAS

Subfield name	Label	Value	Format	Comment
Referenced Record name	*RRNM		b11	Record name of the referenced record
Referenced Record identifier	RRID		b14	Record identifier of the referenced record
Topology indicator	TOPI		b11	 {1} - Beginning point {2} - End point {3} - Beginning & End point

A1.6.7.6 Segment Control field - SECC

Subfield name	Label	Value	Format	Comment
Segment update instruction	SEUI	{1},{2} or {3}	b11	 {1} - Insert {2} - Delete {3} - Modify
Segment index	SEIX		b12	Index (position) of the addressed segment in the target record
Number of segments	NSEG		b12	Number of segments in the update record

A1.6.7.7 Segment Header field - SEGH

Subfield name	Label	Value	Format	Comment
Interpolation	INTP	{4}	b11	{4} - Loxodromic

A1.6.7.8 Composite Curve Record Identifier field - CCID

Subfield name	Label	Value	Format	Comment
Record name	RCNM	{125}	b11	{125} - Composite Curve
Record identification number	RCID		b14	Range: 1 to 2 ³² -2
Record version	RVER		b12	RVER contains the serial number of the record edition
Record update instruction	RUIN	{1},{2} or {3}	b11	{1} - Insert {2} - Delete
		{3}		{2} - Delete {3} - Modify

A1.6.7.9 Curve Component Control field - CRPC

Subfield name	Label	Value	Format	Comment
Curve Component update instruction	CCUI		b11	{1} - Insert {2} - Delete {3} - Modify
Curve Component index	CCIX		b12	Record identifier of the referenced record
Number of Curve Components	NCCO		b12	{1} - Forward{2} - Reverse

A1.6.7.10 Curve Component field - CUCO

Subfield name	Label	Value	Format	Comment
Referenced Record name	*RRNM		b11	Record name of the referenced record
Referenced Record identifier	RRID		b14	Record identifier of the referenced record
Orientation	ORNT		b11	{1} - Forward
				{2} - Reverse

A1.6.7.11 Surface Record Identifier field - SRID

Subfield name	Label	Value	Format	Comment
Record name	RCNM	{130}	b11	{130} - Surface
Record identification number	RCID		b14	Range: 1 to 2 ³² -2
Record version	RVER		b12	RVER contains the serial number of the record edition
Record update instruction	RUIN	{1},{2} or {3}	b11	 {1} - Insert {2} - Delete {3} - Modify

A1.6.7.12 Ring Association field - RIAS

Subfield name	Label	Value	Format	Comment
Referenced Record name	*RRNM		b11	Record name of the referenced record
Referenced Record identifier	RRID		b14	Record identifier of the referenced record
Orientation	ORNT		b11	{1} - Forward{2} - Reverse
Usage indicator	USAG		b11	{1} - Exterior{2} - Interior
Ring Association update instruction	RAUI	{1} or {2}	b11	{1} - Insert {2} - Delete

A1.6.8 Feature Type Record Identifier field - FRID

Subfield name	Label	Value	Format	Comment
Record name	RCNM	{100}	b11	{100} - Feature type
Record identification number	RCID		b14	Range: 1 to 2 ³² -2
Object code	OBJC		b12	A valid feature type code from the FC
Record version	RVER		b12	RVER contains the serial number of the record edition
Record update instruction	RUIN	{1},{2} or	b11	{1} - Insert
		{3}		{2} - Delete
				{3} - Modify

A1.6.9 Feature Object Identifier field - FOID

Subfield name	Label	Value	Format	Comment
Producing agency	AGEN		b12	Agency code
Feature identification number	FIDN		b14	Range: 1 to 2 ³² -2
Feature identification subdivision	FIDS		b12	Range: 1 to 2 ¹⁶ -2

A1.6.10 Spatial Association field - SPAS

Subfield name	Label	Value	Format	Comment	Comment [J32]: 110, 115, 120, 125, 130 are
Referenced Record name	*RRNM		b11	Record name of the referenced record	the five allowable values.

S-101

Referenced Record identifier	RRID		b14	Record identifier of the referenced record
Orientation	ORNT		b11	 {1} Forward {2} Reverse {25} NULL (Not Applicable)
Scale Minimum	SMIN		b14	Denominator of the largest scale for which the feature type can be depicted by the referenced spatial object. If the value is 0 it does not apply.
Scale Maximum	SMAX		b14	Denominator of the smallest scale for which the feature type can be depicted by the referenced spatial object. If the value is 2 ³² -1 it does not apply.
Spatial Association Update Instruction	SAUI	{1} or {2}	b11	{1} - Insert {2} - Delete

A1.6.11 Feature Association – FEAS

Subfield name	Label	Value	Format	Comment
Referenced Record name	*RRNM		b11	Record name of the referenced record
Referenced Record identifier	RRID		b14	Record identifier of the referenced record
Association Code	ASCD		b12	A valid code for the association
Role Code	RLCD		b12	A valid code for the role
Feature Association Update Instruction	FAUI	{1} or {2}	b11	{1} - Insert
				{2} - Delete

A1.6.12 Theme Association field - THAS

Subfield name	Label	Value	Format	Comment
Referenced Record name	*RRNM		b11	Record name of the referenced record
Referenced Record identifier	RRID		b14	Record identifier of the referenced record
Theme Association Update Instruction	TAUI	{1} or {2}	b11	{1} - Insert
				{2} - Delete

S-101

A1.6.13 Masked Spatial Type field - MASK

Subfield name	Label	Value	Format	Comment
Referenced Record name	*RRNM		b11	Record name of the referenced record
Referenced Record identifier	RRID		b14	Record identifier of the referenced record
Mask Update Instruction	MUIN	{1} or {2}	b11	{1} - Insert
				{2} - Delete

Annex B

Data Classification and Encoding Guide

S-101

Annex C – Normative

Business Rules of S-101

C.1 Overview

C.1.1 Introduction

The purpose of this Normative Annex is to provide the business rules of S-101. This annex will contain various use cases for implementers of this product specification to use as guidance.

C.1.4 S-101 General Data Product Description

C.2 Data product specification metadata

C.3 Specification Scopes

C.4 Data Set Identification

Spatial Resolution:

The scales for ENC have been aligned with the standard RADAR ranges and are as follows:

Standard RADAR Ranges	Scale
	>1:3,000,000
200 NM	1:3,000,000
96 NM	1:1,500,000
48 NM	1:700,000
24NM	1:350,000
12 NM	1:180,000
6 NM	1:90,000
3 NM	1:45,000
1.5 NM	1:22,000
0.75 NM	1:12,000
0.5 NM	1:8,000

S-101

0.25 NM	1:4,000
	<=1:2,000

Table 1: Standard Display Scales

C.5 Data Content and structure

- C.5.1 Introduction
- C.5.2 Application Schema

C.4.3 Feature Catalogue

- C.4.3.1 Introduction
- C.4.3.2 Feature Types
- C.4.3.2.1 Geographic
- C.4.3.2.2 Meta (S-57 PS 3.4).
- C.4.3.2.3 Aggregated (S-57 PS 3.9)
- C.4.3.2.4 Theme
- C.4.3.2.4.1 Skin of the Earth Theme (S-57 PS 3.10.1)
- C.4.3.3 Feature Relationship
- C.4.3.3.1 Association
- C.4.3.3.2 Aggregation
- C.4.3.3.3 Composition

C.4.3.4 Information Types

S-101

January 2010

C.4.3.5 Attributes

C.4.3.5.1 Numeric Attribute Values

C.4.3.5.2 Complex Attributes

C.4.3.5.3 Text Attribute Values

C.4.3.5.3.1 Text Placement

C.4.3.5.4 Mandatory Attribute Values

C.4.3.5.5 Missing Attribute Values

C.4.4 Feature Object Identifier.

Feature Object Identifier's must not be reused, even when a feature has been deleted.

C.4.5 Scale Independent and Scale Dependent Cells

C.4.6 Display

It will not be possible for a user to zoom past a cells display scale maximum or minimum values. In the event a user wishes to zoom into the product see the detail of the data in greater clarity a larger display scale cell should be loaded. Conversely if the user wished to get an overview of an area and zooms out a smaller display scale chart will load when the minimum value is reached. If there is no smaller or larger scale information available systems will not allow users to unload the current cell or zoom past the display scale max and min values. Producers of the ENC data have made the informed decision that data viewed beyond the max and min display scales would be degraded to such an extent that the product would become unsafe.

- MINDSC -1 indicates to the ECDIS at which scale an ENC should be loaded and displayed, when zooming in into an area where there exists a larger scale ENC.
- MINDSC indicates to the ECDIS at which scale an ENC should be unloaded, when zooming out into an area where a smaller scale ENC exists.
- OPTDSC indicates to the ECDIS at which scale an ENC should be loaded and displayed, when zooming out into an area where there exists a smaller scale ENC.
- OPTDSC -1 indicates to the ECDIS at which scale an ENC should be unloaded, when zooming in into an area where a larger scale ENC exist.
- MAXDSC indicates to the ECDIS the largest scale at which the ENC should be displayed without the Overscale Pattern

S-101

These rules shall only apply when there is no smaller or larger scale ENC data available.

The scale range between the optimum display and the max display is what is considered safe for use. The ENC producer must define the range

C.4.6.1 Optimum Display Scale

The optimum display scale shall be set at one of the spatial resolutions specified in clause 3 and is carried in the DSID (NEED TO DEFINE FIELD)

C.4.6.2 Minimum Display Scale

The minimum display scale shall be the smallest scale which the ENC should be displayed.

C.4.6.3 Maximum Display Scale

The maximum display scale shall be the largest scale at which the ENC should be displayed without the ECDIS giving an overscale warning

C.4.7 Geometry

C.5 Coordinate Reference Systems (CRS)

- C.5.1 Introduction
- C.5.2 Horizontal Coordinate Reference System
- C.5.3 Vertical CRS for Soundings
- C.6 Data Quality
- C.7 Data Capture and Classification
- C.8 Maintenance
- C.9 Portrayal
- C.10 Data Product format (encoding)
- C.10.1 Introduction

S-101

- C.10.1.1 Encoding of Latitude and Longitude
- C.10.1.2 Encoding of Depths
- C.11 Data Product Delivery
- C.11.1 Introduction
- C.11.2 Exchange Set
- C.11.3 Dataset
- C.11.3.1 Data Sets
- C.11.3.2 Dataset file naming
- C.11.3.3 New Editions, Re-Issues and Updates(S-57 PS 5.7)

When a feature pointing to a text, picture or application file is deleted or updated so that it no longer references the file, the ECDIS software should check to see whether any other feature referenced the same file, before that file is deleted.

- C.11.4 Support Files
- C.11.4.1 Support File Naming
- C.11.4.2 Support File Management
- C.11.5 Exchange Catalogue
- C.11.6 Data integrity
- C.11.6.1 ENC data integrity measures
- C.11.6.2 Implementation
- C.11.6.3 Processing

C.12 Metadata

- C.12.1 Introduction
- C.12.1.1 Exchange Set Metadata
- C.12.1.2 Dataset Metadata

S-101

January 2010

C.12.1.3 Support File Metadata

C.12.1.4 Exchange Catalogue File Metadata

C.12.2 Language

S-101

January 2010

S-101